

324D L

Hydraulic Excavator



Engine

Engine Model	Cat® C7 with ACERT™ Technology	
Net Flywheel Power	140 kW	188 hp

Weights

Operating Weight – Minimum	24 170 kg	53,285 lb
----------------------------	-----------	-----------

- Base Machine, Reach Boom, R2.5CB1 (8 ft 2 in) Stick, 0.63 m³ (0.82 yd³) Bucket, 600 mm (24 in) Shoes.

Operating Weight	25 100 kg	55,343 lb
------------------	-----------	-----------

- Base Machine, Reach Boom, R2.95CB1 (9 ft 8 in) Stick, 1.1 m³ (1.44 yd³) Bucket, 790 mm (31 in) Shoes.

Operating Weight – Maximum	26 250 kg	57,871 lb
----------------------------	-----------	-----------

- Base Machine, Mass Boom, M2.5DB (8 ft 2 in) Stick, 2.34 m³ (3.06 yd³) Bucket, 790 mm (31 in) Shoes.

NOTE – The above configurations do not include any optional attachments.

324D L Hydraulic Excavator

The D Series incorporates innovations for improved performance and versatility.

C7 with ACERT™ Technology

- ✓ ACERT™ Technology works at the point of combustion to optimize engine performance and provide low exhaust emissions to meet U.S. EPA Tier 3 emission regulations, with exceptional performance capabilities and proven reliability. **pg. 4**

Versatility

Caterpillar offers a wide variety of factory-installed attachments that enhance performance and job site management. **pg. 11**

Hydraulics


The hydraulic system has been designed to provide reliability and outstanding controllability. An optional Tool Control System provides enhanced flexibility. **pg. 5**

Service and Maintenance

Fast, easy service has been designed in with extended service intervals, advanced filtration, convenient filter access and user-friendly electronic diagnostics for increased productivity and reduced maintenance costs. **pg. 12**

Operator Comfort

- ✓ A ROPS cab provides maximum space, wider visibility and easy access to switches. The monitor is a full-color graphical display that allows the operator to understand the machine information easily. Overall, the new ROPS cab provides a comfortable environment for the operator. **pg. 6**

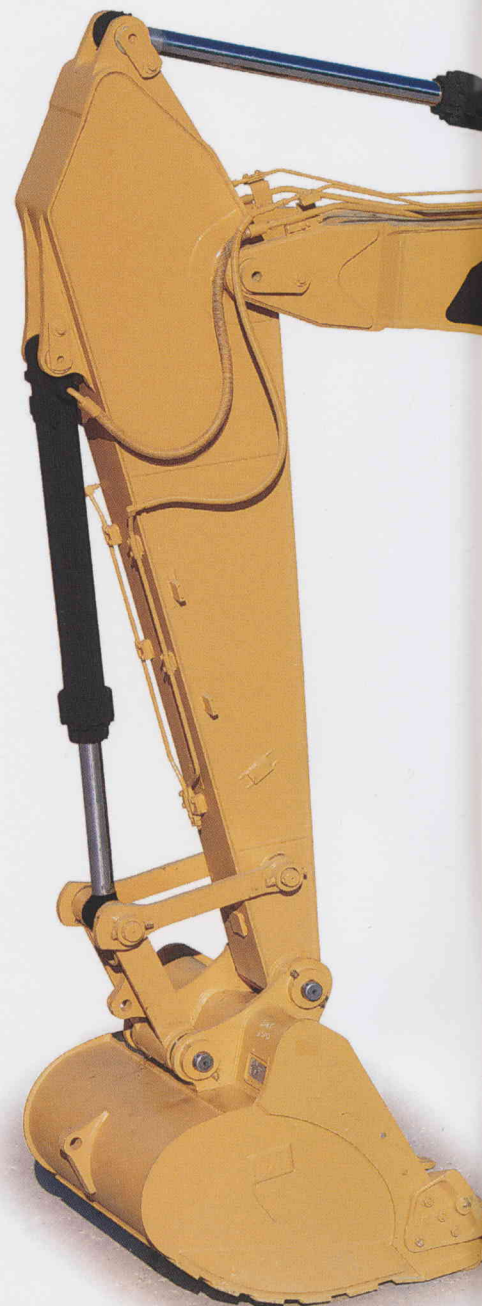

Structures

Caterpillar® design and manufacturing techniques assure outstanding durability and service life from these important components. **pg. 8**

Booms, Sticks and Bucket Linkages

Three lengths of booms and five sticks are available, offering a range of configurations suitable for a wide variety of application conditions. The bucket linkage pins have been enlarged to improve reliability and durability. All Booms and Sticks are stress relieved. **pg. 9**

Work Tools – Attachments

- ✓ A variety of work tools, including buckets, couplers, hammers, and shears are available through Cat Work Tools. **pg. 10**

Complete Customer Support


Your Cat® dealer offers a wide range of services that can be set up under a customer support agreement when you purchase your equipment. The dealer will help you choose a plan that can cover everything from machine configuration to eventual replacement. **pg. 13**



✓ *New Feature*

C7 with ACERT™ Technology

The Cat® C7 gives the 324D exceptional power and fuel efficiency unmatched in the industry for consistently high performance in all applications.

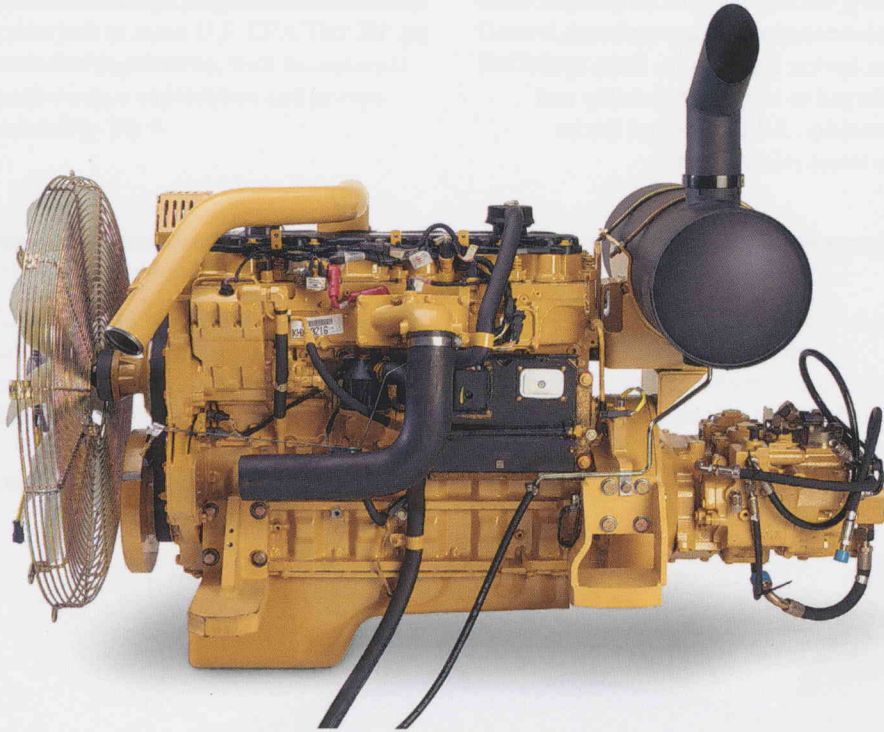

Cat C7. The Cat C7 with ACERT™ Technology introduces a series of evolutionary, incremental improvements that provide breakthrough engine technology. The building blocks of ACERT Technology are fuel delivery, air management and electronic control. ACERT Technology optimizes engine performance while meeting U.S. EPA Tier 3 emission regulations.

Performance. The 324D L, equipped with the C7 engine with ACERT™ Technology, provides 12% more horsepower as compared to the 3126B ATAAC HEUI in the 325C L.

Automatic Engine Speed Control.

The two-stage, one-touch control maximizes fuel efficiency and reduces sound levels.

ADEM™ A4 Engine Controller.

The ADEM A4 electronic control module manages fuel delivery to get the best performance per liter of fuel used. The engine management system provides flexible fuel mapping, allowing the engine to respond quickly to varying application needs. It tracks engine and machine conditions while keeping the engine operating at peak efficiency.

Electronic Control Module.

The Electronic Control Module (ECM) works as the “brain” of the engine’s control system, responding quickly to operating variables to maximize engine efficiency. Fully integrated with sensors in the engine’s fuel, air, coolant, and exhaust systems, the ECM stores and relays information on conditions such as rpm, fuel consumption, and diagnostic information.

Fuel Delivery. The Cat C7 features electronic controls that govern the fuel injection system. Multiple injection fuel delivery involves a high degree of precision. Precisely shaping the combustion cycle lowers combustion chamber temperatures, generating fewer emissions and optimizing fuel combustion. This translates into more work output for your fuel cost.

Cooling System. The cooling fan is directly driven from the engine. An electrically controlled viscous clutch fan is available as an attachment to reduce fan noise. The optimum fan speed is calculated based on the target engine speed, coolant temperature, hydraulic oil temperature and actual fan speed. The Cat C7 delivered a completely new layout that separates the cooling system from the engine compartment.

Air Cleaner. The radial seal air filter features a double-layered filter core for more efficient filtration and is located in a compartment behind the cab. A warning is displayed on the monitor when dust accumulates above a preset level.

Noise Reduction Technologies.

The engine mounts are rubber-isolating mounts matched with the engine package. Further noise reduction has been achieved through design changes to the isolated top cover, oil pan, multiple injection strategy, insulated timing cover, sculpted crankcase and gear train refinements.

Hydraulics

Cat® hydraulics deliver power and precise control to keep material moving.

Component Layout. The 324D hydraulic system and component locations have been designed to provide a high level of system efficiency. The main pumps, control valves and hydraulic tank are located close together to allow for shorter tubes and lines between components that reduce friction loss and pressure drops in the lines. The layout further provides greater operator comfort by placing the radiator on the cab side of the upper structure. This allows incoming air to enter the engine compartment from the operator side and hot air and corresponding engine sound to exit on the opposite side away from the operator. This reduces engine compartment heat and sound being transmitted to the operator.

Pilot System. The pilot pump is independent from the main pumps and controls the front linkage, swing and travel operations.

Hydraulic Cross Sensing System. The hydraulic cross sensing system utilizes each of two hydraulic pumps to 100 percent of engine power, under all operating conditions. This improves productivity with faster implement speeds and quicker, stronger pivot turns.

Boom and Stick Regeneration Circuit. Boom and stick regeneration circuit saves energy during boom-down and stick-in operation which increases efficiency, reduces cycle times and pressure loss for higher productivity, lower operating costs and increased fuel efficiency.



Auxiliary Hydraulic Valve. The auxiliary valve is standard on the 324D. Control Circuits are available as attachments, allowing for operation of high and medium pressure tools such as shears, grapples, hammers, pulverizers, multi-processors and vibratory plate compactors.


Hydraulic Cylinder Snubbers. Snubbers are located at the rod-end of the boom cylinders and both ends of the stick cylinders to cushion shocks while reducing sound levels and extending component life.

Operator Comfort

Designed for comfort, simple and easy operation, the 324D allows the operator to focus on production.



Operator Station. The workstation is spacious, quiet and comfortable, assuring high productivity during a long work day. The air conditioner and attachment switches are conveniently located on the right-hand wall, and the key switch and throttle dial are on the right-hand console.

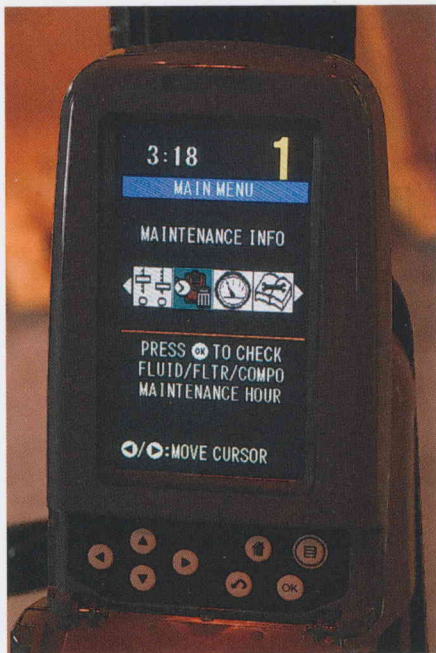

Monitor. The monitor is a full color 400x234 pixels Liquid Crystal Display (LCD) graphic display. The monitor angle can be adjusted to minimize sun glare and has the capability of displaying information in twenty-seven different languages.

Pre-Start Check. Prior to starting the machine, the system will check for low fluid levels for the engine oil, hydraulic oil and engine coolant and warn the operator through the monitor in the event display area.

Gauge Display. Three analog gauges, fuel level, hydraulic oil temperature and coolant temperature, are displayed in this area.

Event Display. Machine information is displayed in this area with the icon and language.

Multi-information Display. This area is reserved for displaying various information which is convenient for the operator. The "CAT" logo is displayed when no information is available to be displayed.

Standard Cab Equipment. To enhance operator comfort and productivity, the cab includes a lighter, drink holder, coat hook, service meter, literature holder, magazine rack and storage compartment.

Seat. A new optional air suspension seat is available in the 324D. The standard and optional seats provide a variety of adjustments to suit the operator's size and weight including fore/aft, height and weight. Wide adjustable armrests and a retractable seat belt are also included.

Joystick Control. Joystick controls have low lever effort and are designed to match the operator's natural wrist and arm position. The operator can operate joystick controls with an arm on the armrest and the horizontal and vertical strokes have been designed to reduce operator fatigue.

Hydraulic Activation Control Lever. For added safety, this lever must be in the operate position to activate the machine control functions.

Automatic Climate Control. Fully automatic climate control adjusts temperature and flow, and determines which air outlet is best in each situation with a touch of a button.



Console. Redesigned consoles feature a simple, functional design to reduce operator fatigue, ease of switch operation and excellent visibility. Both consoles have attached armrests with height adjustments.

ROPS Certified Operator Station. Features a new ROPS (Roll Over Protective Structure) compliant cab structure as standard with 10% improved visibility and more head room space over previous non-ROPS cab.

The cab air filter is now located on the side of the cab and is accessible at ground level.

This design also allows for a Falling Object Guard System (FOGS) or front windshield guard to be bolted directly to the cab, either at the factory or in the field, enabling the machine to meet all job site requirements.

Cab Mounts. The ROPS cab is attached to the frame with viscous rubber cab mounts, which dampen vibrations and sound levels while enhancing operator comfort.



Windows. All glass is affixed directly to the cab for excellent visibility eliminating window frames. The upper front windshield opens, closes and stores on the roof above the operator with a one-touch action release system.

Wipers. Pillar-mounted wipers increase the operator's viewing area and offer continuous and intermittent modes.

Skylight. An enlarged skylight with sunshade provides excellent visibility and ventilation.

Structures

324D structural components and undercarriage are the backbone of the machine's durability.

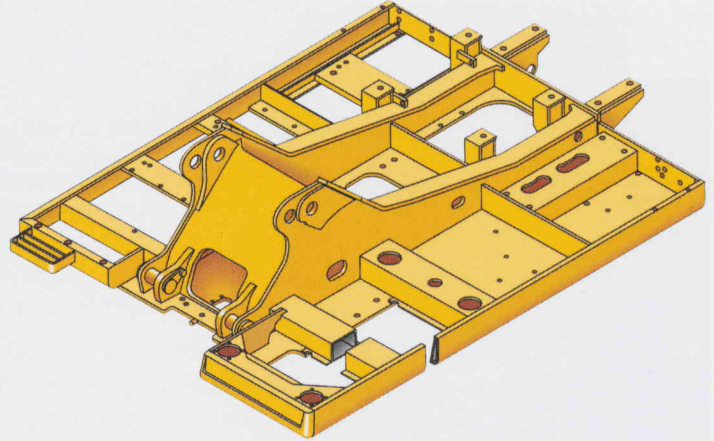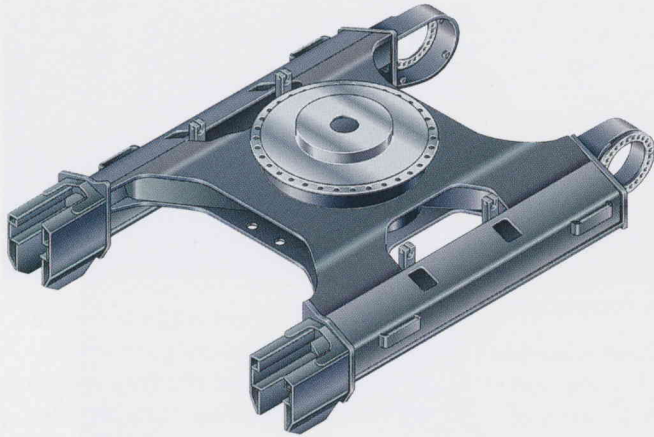

Robotic Welding. Up to 95% of the structural welds on a Caterpillar® Excavator are completed by robots. Robotic welds achieve over three times the penetration of manual welds.

Carbody Design and Track Roller Frames. X-shaped, box-section carbody provides excellent resistance to torsion bending. Robot-welded track roller frames are press-formed, pentagonal units to deliver exceptional strength and service life.

Main Frame. Rugged main frame is designed for maximum durability and efficient use of materials.

Undercarriage. Durable Cat® undercarriage absorbs stresses and provides excellent stability.


Swing Bearing. The swing bearing utilizes cross roller bearings versus the traditional ball bearing design. The cross roller bearing design allows for more surface contact to absorb the stresses that are a result of the high swing torque that Cat offers. It provides exceptional machine stability and reduces machine pitching during boom down operation.

Rollers and Idlers. Sealed and lubricated track rollers, carrier rollers, and idlers provide excellent service life, to keep the machine in the field longer.

Long Undercarriage. The long (L) undercarriage maximizes stability and lift capacity. This long, wide, and sturdy undercarriage offers a very stable work platform.

Booms, Sticks and Bucket Linkages

Built for performance and long service life, Caterpillar® booms and sticks are large, welded, box-section structures with thick, multi-plate fabrications in high stress areas.

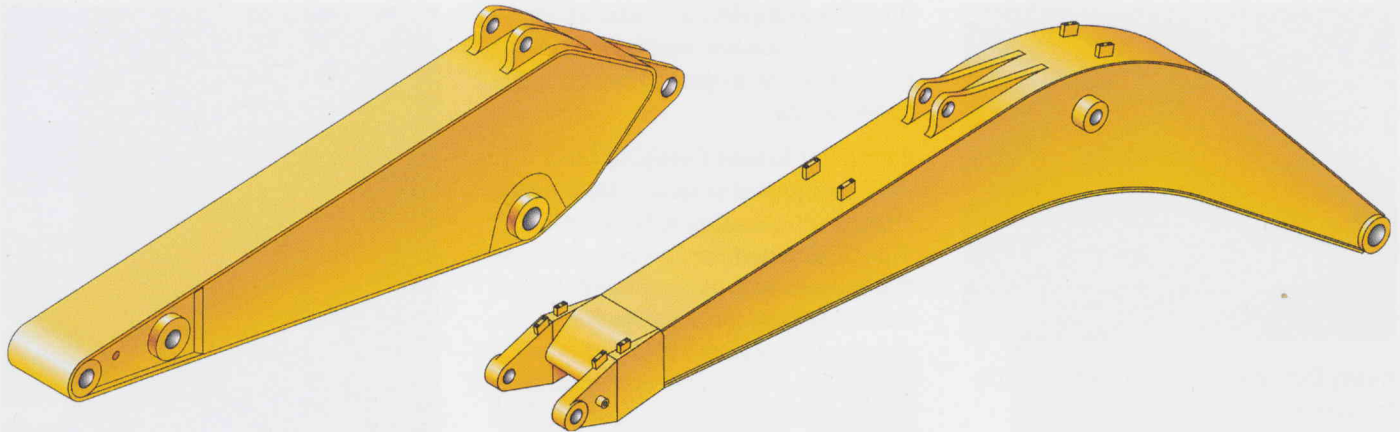

Reach Boom. The reach boom features an optimum design that maximizes digging envelopes with three stick choices:

R3.6B and R2.95CB Sticks. These sticks have enough capacity for excellent reach and depth in trenching and general construction applications.


R2.5CB Stick. This stick has been designed with enough reach and depth to match a large-capacity bucket and higher stick digging forces than the longer reach sticks.

Mass Excavation Boom. The mass excavation boom maximizes productivity. The mass version offers significantly higher digging forces and allows use of larger buckets.

M2.5DB. The DB Stick uses a D-family bucket and was designed for high volume earth moving, powerful digging force and a large capacity bucket. Combined with a Mass boom, this stick delivers outstanding productivity.

Super Long Reach. This configuration offers reaches to over 8.3 m (60 feet). It is well suited for ditch cleaning applications.

Linkage Pins. The bucket linkage pins have been enlarged to improve reliability and durability. All the pins in the front linkages have thick chrome plating, giving them high wear and corrosion resistance.

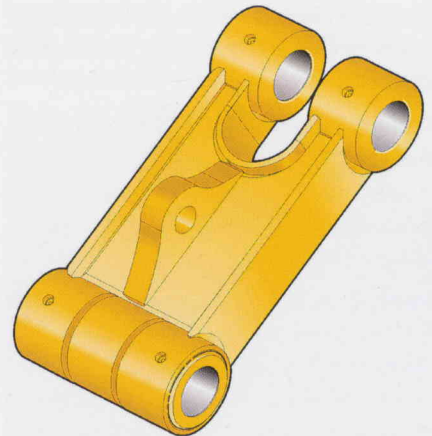

Bucket Linkage. The power link improves durability, increases machine-lifting capability in key lifting positions and with the integrated lift-eye it is easier to use than compared to the previous power link.

Work Tools – Attachments

The 324D has an extensive selection of work tools to optimize machine performance.



Heavy Duty Buckets. Heavy-duty (HD) buckets are used for a wide range of moderately abrasive applications such as mixed dirt, clay and rock. HD buckets have best loading and dumping characteristics and will empty easier in cohesive material. More robust construction than the GP buckets.

General Purpose Capacity (GP-C) Buckets. General Purpose Capacity Buckets are best for digging in soft to hard ground with low to moderately abrasive materials.

Heavy-Duty Power (HDP) Buckets. For use in moderately abrasive applications where breakout force and cycle times are critical. Maximizes tip force and improves cycle times in most materials.

Heavy Duty Rock Buckets. Heavy duty rock for aggressive bucket loading in highly abrasive application such as shot rock and granite. Features include:

- Thickest wear plates to extend the life of bucket in severe applications
- Side wear plated extend further up the side of the bucket for maximum protection in rocky soils
- Buckets accept sidebar protectors for best sidebar protection, or sidecutters for best fill characteristics and bucket wear protection

Ditch Cleaning (DC) Buckets.

These wide shallow buckets are best for bank forming, ditch cleaning, and finishing.

Caterpillar Ground Engaging Tools (GET).

All bucket in the CB/DB Family utilize the Caterpillar K Series® GET. This GET system uses a vertical retainer that is easier to remove and install than the Cat J Series pin. The tip shapes are more aggressive and offer better penetration than the previous generation of tips. There are also a variety of side cutters and sidebar protectors to match operating conditions.



Hammer

Cat Hydraulic Hammers are precisely matched to Cat machines for optimum performance in a wide variety of demolition and construction applications.



Thumb

Cat thumbs multiply the capabilities of your excavator. This Highly versatile tool works in conjunction with the bucket to transform an excavator into a versatile material-handling machine.



Multi-processor

Multi-processors do the work of many types of demolition tools by use of interchangeable jaw sets. Changing jaws allows a single unit to crush, pulverize and perform a variety of specialized cutting tasks, such as cutting steel rebar and tanks.

Versatility

A wide variety of optional factory-installed attachments are available to enhance performance and improve job site management.



Tool Control System. This system offers the most flexibility and versatility of the auxiliary options offered. This system is available in two configurations, as a stand-alone system or with a medium pressure circuit and third pump. This system is capable of running either one-way or two-way tools and one one-pump or two pump tools. The additional of the medium pressure circuit allows use of tools that rotate such as grapples, shears or multi-processors. Up to 10 different tool settings can be pre-programmed and selected through the monitor.

Auxiliary Hydraulics Options. There are four different options that can be factory installed to meet the various demands for hydra-mechanical tools. Single-Function, Double-Function, Tool Control System without Medium Pressure and Tool Control System with Medium Pressure are available as a factory installed option.

Single-Function Auxiliary Hydraulics.

This circuit utilizes one-way flow action with two pumps and can run tools such as hammers and vibratory plate compactors.

Double-Function Auxiliary Hydraulics.

This circuit utilizes two-way flow and one pump and is capable of running tools such as a thumb, tilt-bucket or non-rotating grapples or shears.



Machine Security. An optional Machine Security System is available from the factory on the 324D L. This system controls when the machine can be operated and utilizes specific keys to prevent unauthorized machine use, a significant theft deterrent.

Product Link. The machine is pre-wired to accept Product Link systems to be installed in the field. Product Link is also available as a factory installed attachment. Product Link can assist with Fleet Management that will keep track of hours, location, security and product health.



Pin Grabber Plus Hydraulic Pin Grabber

Increases versatility of the excavator by allowing the machine to pick up a wide variety of work tools without leaving the cab.



360 Scrap Shear

Caterpillar Scrap Shears feature 360° rotation and a high force-to-weight ratio. Used for demolishing steel structures, and preparing bulk scrap (such as cars, farm machinery and railroad cars) for further processing.

Service and Maintenance

Simplified service and maintenance features save you time and money.

Ground Level Service. The design and layout of the 324D was made with the service technician in mind. Many service locations are easily accessible at ground level allowing critical maintenance to get done quickly and efficiently.



Air Filter Compartment. The air filter features a double-element construction for superior cleaning efficiency. When the air cleaner plugs, a warning is displayed on the monitor screen inside the cab.

Pump Compartment. A service door on the right side of the upper structure allows ground-level access to the pump and pilot filter.



Radiator Compartment. The left rear service door allows easy access to the engine radiator, oil cooler and air-to-air-after-cooler. A reserve tank and drain cock are attached to the radiator for simplified maintenance.



Greasing Points. A concentrated remote greasing block on the boom delivers grease to hard-to-reach locations on the front.

Capsule Filter. The hydraulic return filter, a capsule filter, is situated outside the hydraulic tank. This filter prevents contaminants from entering the system when hydraulic oil is changed and keeps the operation clean.

Fan Guard. Engine radiator fan is completely enclosed by fine wire mesh, reducing the risk of an accident.

Anti-Skid Plate. Anti-skid plate covers top of storage box and upper structure to prevent slipping during maintenance.



Diagnostics and Monitoring. The 324D is equipped with S-O-SSM sampling ports and hydraulic test ports for the hydraulic system, engine oil, and for coolant. A test connection for the Cat Electronic Technician (Cat ET) service tool is located in the cab.

Extended Service Interval. 324D service and maintenance intervals have been extended to reduce machine service time and increase machine availability.

Complete Customer Support

Cat® dealer services help you operate longer with lower costs.



Product Support. You will find nearly all parts at our dealer parts counter. Cat dealers utilize a worldwide computer network to find in-stock parts to minimize machine down time. Save money with remanufactured components.

Machine Selection. Make detailed comparisons of the machines you are considering before you buy. What are the job requirements, machine attachments and operating hours? What production is needed? Your Cat dealer can provide recommendations.

Customer Support Agreements.

Cat dealers offer a variety of product support agreements, and work with customers to develop a plan the best meets specific needs. These plans can cover the entire machine, including attachments, to help protect the customer's investment.

Operation. Improving operating techniques can boost your profits. Your Cat dealer has videotapes, literature and other ideas to help you increase productivity, and Caterpillar offers certified operator training classes to help maximize the return on your investment.

Maintenance Services. Repair option programs guarantee the cost of repairs up front. Diagnostic programs such as Scheduled Oil Sampling, Coolant Sampling and Technical Analysis help you avoid unscheduled repairs.

Replacement. Repair, rebuild, or replace? Your Cat dealer can help you evaluate the cost involved so you can make the right choice.

SAFETY.CAT.COM™.

Engine

Engine Model	Cat® C7 with ACERT™ Technology	
Net Flywheel Power	140 kW	188 hp
Net Power – ISO 9249	140 kW	188 hp
Net Power – SAE J1349	139 kW	186 hp
Net Power – EEC 80/1269	140 kW	188 hp
Bore	110 mm	4.33 in
Stroke	127 mm	5 in
Displacement	7.2 L	439.4 in ³

- The 324D L meets U.S. EPA Tier 3 and EU Stage III engine emissions requirements.
- Net flywheel power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler and alternator.
- No engine derating needed up to 2300 m (7,500 ft).

Weights

Operating Weight	25 100 kg	55,343 lb
------------------	-----------	-----------

- Base Machine, Reach Boom, R2.95CB1 (9 ft 8 in) Stick, 1.1 m³ (1.44 yd³) Bucket, 790 mm (31 in) Shoes.

NOTE – The above configuration does not include any optional attachments.

Track

Standard w/Long Undercarriage	790 mm	31 in
Optional	700 mm	28 in
Optional – Double Grouser	600 mm	23.62 in
Number of Shoes Each Side – Long Undercarriage	51	
Number of Track Rollers Each Side – Long Undercarriage	8	
Number of Carrier Rollers Each Side – Long Undercarriage	2	

Swing Mechanism

Swing Speed	9.6 rpm	
Swing Torque	73.4 kN·m	54,137 lb ft

Service Refill Capacities

Fuel Tank Capacity	520 L	137 gal
Cooling System	31 L	8.2 gal
Engine Oil	30 L	8 gal
Swing Drive	10 L	2.6 gal
Final Drive (each)	6 L	1.6 gal
Hydraulic System (including tank)	300 L	79 gal
Hydraulic Tank	145 L	38 gal

Drive

Maximum Drawbar Pull	227 kN	51,032 lb
Maximum Travel Speed	5.4 km/h	3.4 mph

Hydraulic System

Main Implement System – Maximum Flow (2x)	220 L/min	58 gal/min
Max. pressure – Equipment	35 000 kPa	5,076 psi
Max. pressure – Equipment – Heavy	36 000 kPa	5,221 psi
Max. pressure – Travel	35 000 kPa	5,076 psi
Max. pressure – Swing	24 500 kPa	3,553 psi
Pilot System – Maximum flow	32.4 L/min	9 gal/min
Pilot System – Maximum pressure	3900 kPa	566 psi
Boom Cylinder – Bore	135 mm	5.3 in
Boom Cylinder – Stroke	1305 mm	51.4 in
Stick Cylinder – Bore	140 mm	5.5 in
Stick Cylinder – Stroke	1660 mm	65.4 in
B1 Family Bucket Cylinder – Bore	120 mm	4.7 in
B1 Family Bucket Cylinder – Stroke	1104 mm	43.5 in
CB1 Family Bucket Cylinder – Bore	130 mm	5.1 in
CB1 Family Bucket Cylinder – Stroke	1156 mm	45.5 in
DB Family Bucket Cylinder – Bore	150 mm	5.9 in
DB Family Bucket Cylinder – Stroke	1151 mm	45.3 in

Sound Performance

Performance	ANSI/SAE J1166 APR 90
-------------	-----------------------


- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT 98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in noisy environment.

Standards

Brakes	SAE J1026 APR90
Cab/ROPS	ISO 12117-2:2008
Cab/FOGS	SAE J1356 FEB88

Dimensions


All dimensions are approximate.

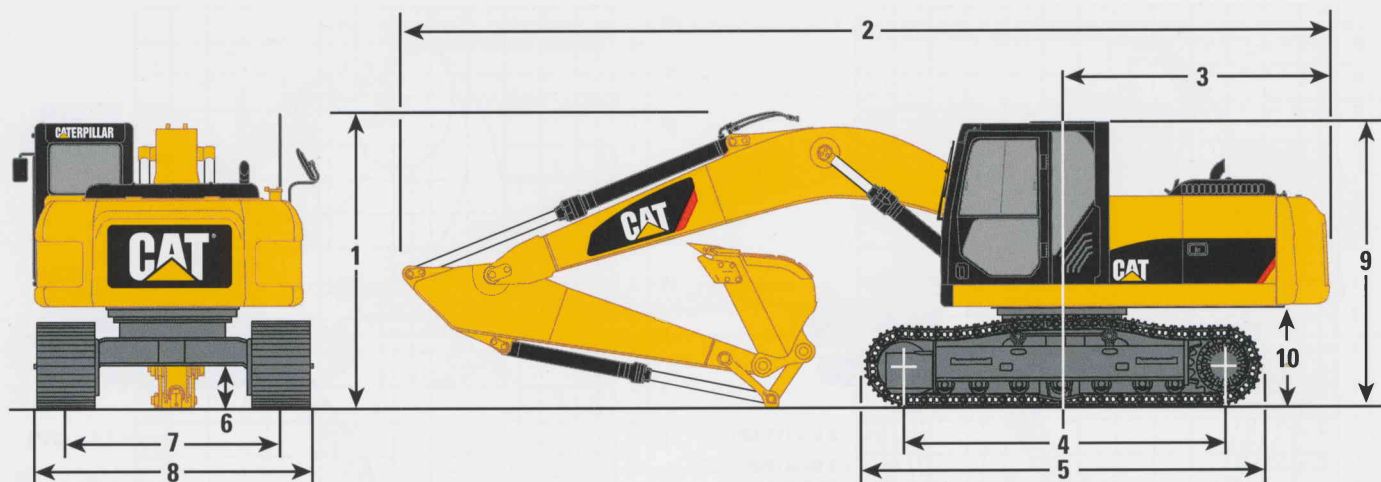

Boom Options		Reach Boom 5.9 m (19'4")			Mass Boom 5.3 m (17'5")
Stick Options		R3.6B1 (11'10")	R2.95CB1 (9'8")	R2.5CB1 (8'2")	M2.5DB (8'2")
1	Shipping height	3430 mm (11'3")	3170 mm (10'5")	3300 mm (10'10")	3450 mm (11'4")
2	Shipping length	10 050 mm (33'0")	10 060 mm (33'0")	10 100 mm (33'2")	9480 mm (31'1")
3	Tail swing radius	3000 mm (9'10")	3000 mm (9'10")	3000 mm (9'10")	3000 mm (9'10")
Undercarriage					
4	Length to center of rollers	3830 mm (12'7")	3830 mm (12'7")	3830 mm (12'7")	3830 mm (12'7")
5	Track length	4630 mm (15'2")	4630 mm (15'2")	4630 mm (15'2")	4630 mm (15'2")
6	Ground clearance	440 mm (1'5")	440 mm (1'5")	440 mm (1'5")	440 mm (1'5")
7	Track gauge	2590 mm (8'6")	2590 mm (8'6")	2590 mm (8'6")	2590 mm (8'6")
8	Transport width				
	790 mm (31") shoes (standard)	3390 mm (11'1")	3390 mm (11'1")	3390 mm (11'1")	3390 mm (11'1")
	700 mm (28") shoes (optional)	3290 mm (10'10")	3290 mm (10'10")	3290 mm (10'10")	3290 mm (10'10")
	600 mm (24") shoes (optional)	3190 mm (10'6")	3190 mm (10'6")	3190 mm (10'6")	3190 mm (10'6")
9	Cab height	2980 mm (9'9")	2980 mm (9'9")	2980 mm (9'9")	2980 mm (9'9")
10	Counterweight clearance	1060 mm (3'6")	1060 mm (3'6")	1060 mm (3'6")	1060 mm (3'6")


Reach Excavator Working Ranges

Reach (R) boom configuration

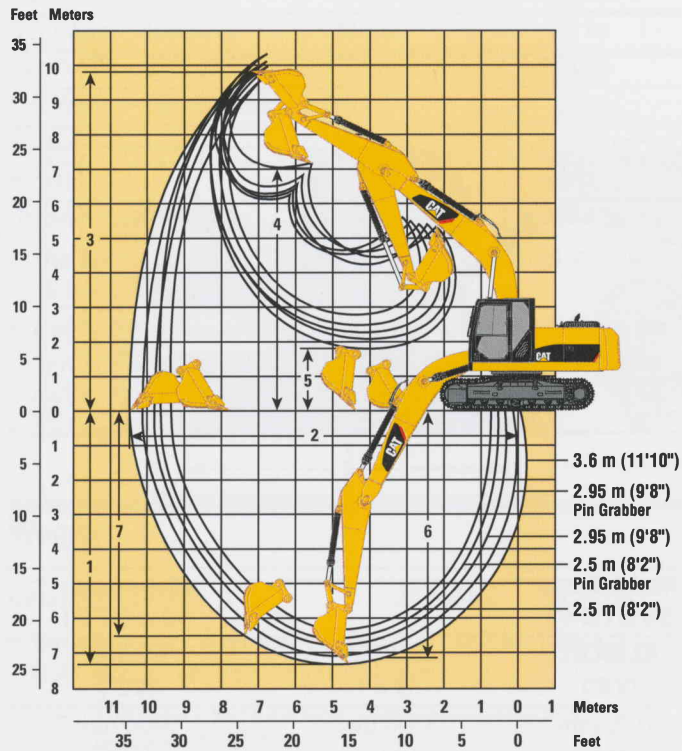

Mass Excavator Working Ranges

Mass (M) boom configuration

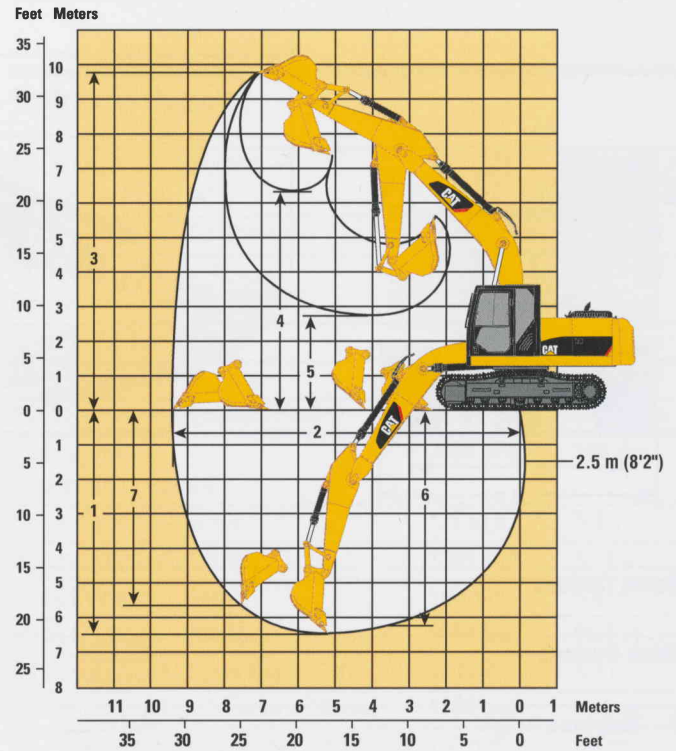

Boom Options

Reach Boom 5.9 m (19'4")

Mass Boom 5.3 m (17'5")

Stick Options

R3.6B1
(11'10")

R2.95CB1
(9'8")

R2.5CB1
(8'2")

R2.95CB1
(9'8")

R2.5CB1
(8'2")

M2.5DB
(8'2")

Bucket Options

GP-C 1.17 m³
(1.53 yd³)

HD 1.35 m³
(1.77 yd³)

HD 1.35 m³
(1.77 yd³)

HD 1.35 m³
(1.77 yd³)
with Pin
Grabber
Coupler


HD 1.35 m³
(1.77 yd³)
with Pin
Grabber
Coupler

HD 1.87 m³
(2.45 yd³)

1	Maximum digging depth	7328 mm (24'1")	6846 mm (22'6")	6396 mm (21'0")	7134 mm (23'5")	6684 mm (21'11")	6488 mm (21'3")
2	Maximum reach at ground level	10 549 mm (34'7")	9829 mm (32'3")	9395 mm (30'10")	10 094 mm (33'1")	9700 mm (31'10")	9446 mm (31'0")
3	Maximum cutting height	9887 mm (32'5")	9946 mm (32'8")	9750 mm (32'0")	10 249 mm (33'8")	10 054 mm (33'0")	9849 mm (32'4")
4	Maximum loading height	7043 mm (23'1")	6590 mm (21'7")	6394 mm (21'0")	6302 mm (20'8")	6106 mm (20'0")	6302 mm (20'8")
5	Minimum loading height	1884 mm (6'2")	2365 mm (7'9")	2823 mm (9'3")	2077 mm (6'10")	2535 mm (8'4")	2731 mm (9'0")
6	Maximum depth cut for 2440 mm (8') level bottom	7174 mm (23'6")	6672 mm (21'11")	6199 mm (20'4")	6974 mm (22'11")	6505 mm (21'4")	6298 mm (20'8")
7	Maximum vertical wall digging depth	6575 mm (21'7")	6075 mm (19'11")	5633 mm (18'6")	3877 mm (12'9")	3490 mm (11'5")	5694 mm (18'8")

Dimensions

All dimensions are approximate.

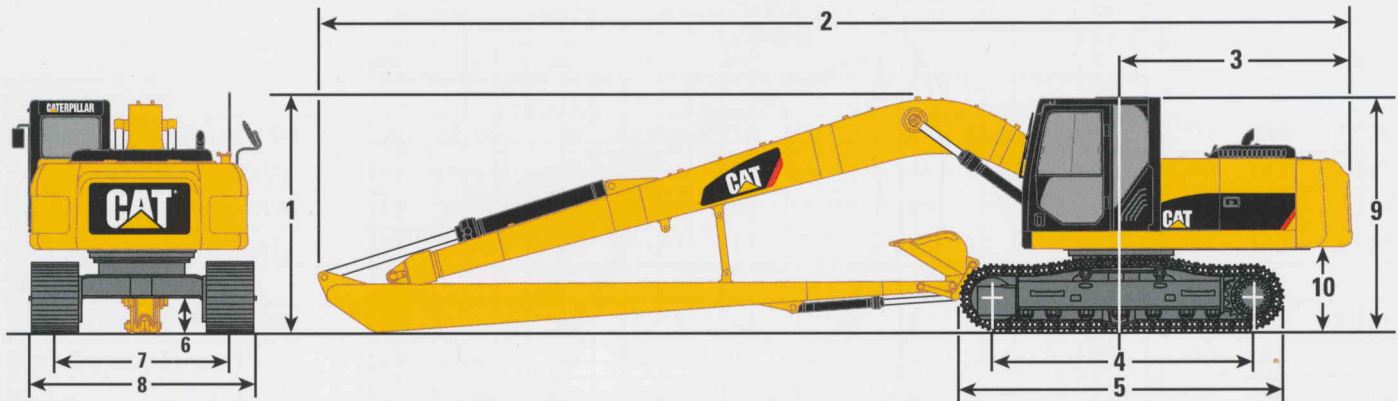

Boom Options

Super Long Reach Boom 10.2 m (33'6")


Stick Options

7.85 m (25'9")

1	Shipping height	3150 mm (10'4")
2	Shipping length	14 340 mm (47'1")
3	Tail swing radius	3000 mm (9'10")
4	Length to center of rollers	3830 mm (12'7")
5	Track length	4630 mm (15'2")
6	Ground clearance	440 mm (1'5")
7	Track gauge	2590 mm (8'6")
8	Transport width	
	800 mm (32") shoes (standard)	3390 mm (11'1")
	700 mm (28") shoes (optional)	3290 mm (10'10")
	600 mm (24") shoes (optional)	3190 mm (10'6")
9	Cab height	2980 mm (9'9")
10	Counterweight clearance	1060 mm (3'6")

Reach Excavator Working Ranges

Reach (R) boom configuration

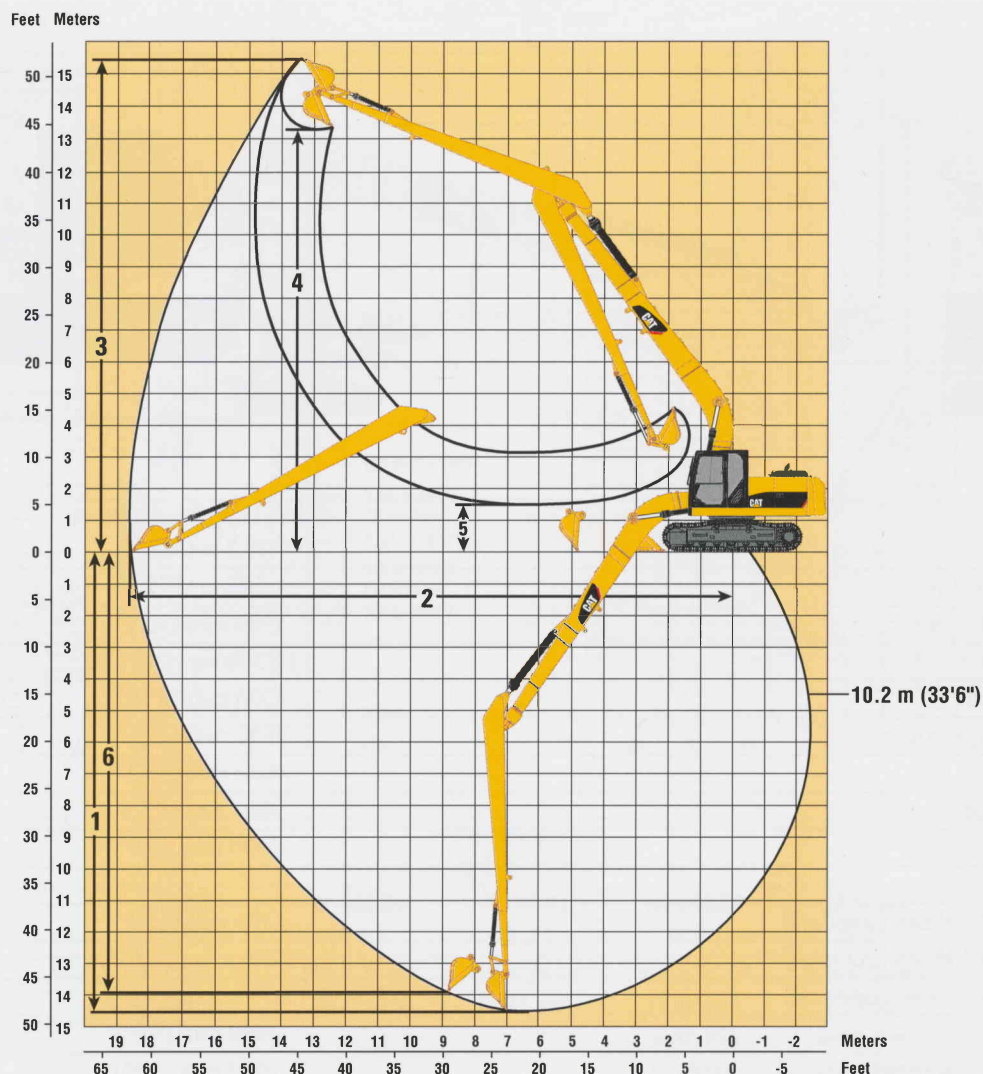

Boom Options

Super Long Reach Boom
10.2 m (33'6")

Stick Options

7.85 m (25'9")

Bucket Options

DC 0.61 m³ (0.8 yd³)

1	Maximum digging depth	14 594 mm (47'11")
2	Maximum reach at ground level	18 603 mm (61'0")
3	Maximum cutting height	15 411 mm (50'7")
4	Maximum loading height	13 285 mm (43'7")
5	Minimum loading height	1483 mm (4'10")
6	Maximum vertical wall digging depth	13 922 mm (45'7")

Bucket and Stick Forces

Stick Options	R3.6B1		R2.95CB1		R2.95CB1 with Pin Grabber Coupler		R2.5CB1		R2.5CB1 with Pin Grabber Coupler		M2.5DB	
	kN	lb	kN	lb	kN	lb	kN	lb	kN	lb	kN	lb
Power Buckets												
Bucket Digging Force (ISO)	172	38,667	186	41,814	150	33,721	186	41,814	150	33,721	239	53,729
Stick Digging Force (ISO)	113	25,471	127	28,551	119	26,752	148	33,272	137	30,799	147	33,047
Bucket Digging Force (SAE)	152	34,171	163	36,644	145	32,597	163	36,644	146	32,822	210	47,210
Stick Digging Force (SAE)	111	24,954	123	27,651	118	26,527	143	32,148	136	30,574	142	31,923
HD and HDR Buckets												
Bucket Digging Force (ISO)	147	33,047	166	37,318	143	32,148	167	37,543	144	32,372	215	48,334
Stick Digging Force (ISO)	111	24,954	124	27,876	117	26,303	144	32,372	135	30,349	143	32,148
Bucket Digging Force (SAE)	132	29,675	147	33,047	131	29,450	147	33,047	132	29,675	190	42,714
Stick Digging Force (SAE)	108	24,279	120	26,977	114	25,628	139	31,248	131	29,450	138	31,024

Major Component Weights

	kg	lb
Base machine with counterweight (without front linkage)		
With 790 mm (31") shoes	21 050 kg	46,407 lb
Two boom cylinders (each)	227	500
Counterweight		
Standard counterweight	4520	9,965
Super long reach counterweight	6760	14,903
Boom (includes lines, pins and stick cylinder)		
Reach boom 5.9 m (19'5")	2033	4,482
Mass boom 5.3 m (17'5")	2138	4,713
Super long reach boom 10.2 m (33'5")	3580	7,893
Stick (includes lines, pins, bucket cylinder and linkage)		
R3.6B1 (11'10")	1199	2,643
R2.95CB1 (9'8")	1208	2,663
R2.5CB1 (8'2")	1149	2,533
M2.5DB (8'2")	1470	3,241
Super long reach stick 7.85 m (25'9")	1610	3,549

Bucket Specifications and Compatibility

Bucket Type	Adaptor	Capacity*		Width		Tip Radius		Teeth Qty	Total Weight		Reach Boom Stick		
		m³	yd³	mm	in	mm	in		kg	lb	R3.6B1	R2.95CB1	R2.5CB1
CB1 Family Buckets													
General Purpose – Capacity	K90	0.63	0.82	610	24	1656.3	65.2	3	729	1,606	—	●	●
	K90	0.86	1.12	762	30	1656.3	65.2	4	847	1,868	—	●	●
	K90	1.09	1.43	914	36	1656.3	65.2	5	951	2,097	—	●	●
	K90	1.34	1.75	1067	42	1656.3	65.2	5	1024	2,258	—	●	●
	K90	1.58	2.07	1219	48	1656.3	65.2	6	1121	2,471	—	⊖	●
	K90	1.83	2.39	1372	54	1656.3	65.2	7	1218	2,684	—	○	⊖
Heavy Duty	K100	0.53	0.69	610	24	1686.3	66.4	3	780	1,720	—	●	●
	K100	0.73	0.95	762	30	1686.3	66.4	3	858	1,891	—	●	●
	K100	0.93	1.22	914	36	1686.3	66.4	4	982	2,165	—	●	●
	K100	1.14	1.49	1067	42	1686.3	66.4	5	1073	2,365	—	●	●
	K100	1.35	1.77	1219	48	1686.3	66.4	5	1143	2,519	—	●	●
	K100	1.57	2.05	1372	54	1686.3	66.4	6	1238	2,730	—	⊖	⊖
	K100	1.78	2.33	1524	60	1686.3	66.4	7	1334	2,941	—	○	○
	K100	1.99	2.60	1676	66	1686.3	66.4	7	1406	3,101	—	∴	○
Heavy Duty Rock	K100	0.73	0.95	762	30	1686.3	66.4	3	965	2,127	—	●	●
	K100	0.93	1.22	914	36	1686.3	66.4	4	1073	2,365	—	●	●
	K100	1.14	1.49	1067	42	1686.3	66.4	5	1174	2,588	—	●	●
	K100	1.35	1.77	1219	48	1686.3	66.4	5	1259	2,775	—	●	●
Heavy Duty Power	K100	1.12	1.46	1067	42	1592.1	62.7	5	1060	2,337	—	●	●
	K100	1.33	1.74	1219	48	1592.1	62.7	5	1137	2,507	—	●	●
	K100	1.53	2.00	1372	54	1592.1	62.7	6	1237	2,727	—	⊖	●
Ditch Cleaning	N/A	1.25	1.63	1534	60	1262.0	49.7	—	739	1,629	—	●	●
	N/A	1.53	2.00	1830	72	1262.0	49.7	—	837	1,845	—	●	●

Assumptions for maximum material density rating:

1. Front linkage fully extended at ground line
2. Bucket curled
3. 100% bucket fill factor

* Based on SAE J296, some calculations of capacity specs fall on borderlines.
Rounding may allow two buckets to have the same English rating, but different metric ratings.

- 2100 kg/m³ (3,500 lb/yd³) max material density
- 1800 kg/m³ (3,000 lb/yd³) max material density
- 1500 kg/m³ (2,500 lb/yd³) max material density
- 1200 kg/m³ (2,000 lb/yd³) max material density
- Not Available

Bucket Specifications and Compatibility

Bucket Type	Adaptor	Capacity*		Width		Tip Radius		Teeth	Total Weight		Reach Boom Stick
		m³	yd³	mm	in	mm	in	Qty	kg	lb	R3.6B1
B Family Buckets											
General Purpose – Capacity	K80	0.57	0.74	610	24	1524.0	60.0	3	646	1,425	●
	K80	0.77	1.01	762	30	1524.0	60.0	4	704	1,551	●
	K80	0.95	1.24	914	36	1524.0	60.0	5	798	1,760	●
	K80	1.17	1.53	1067	42	1524.0	60.0	5	857	1,889	●
	K80	1.39	1.82	1219	48	1524.0	60.0	6	1002	2,208	◐
	K80	1.57	2.05	1372	54	1524.0	60.0	6	1011	2,228	◑
Heavy Duty	K90	0.54	0.70	610	24	1578.0	62.1	3	680	1,500	●
	K90	0.77	1.00	762	30	1578.0	62.1	4	772	1,702	●
	K90	0.84	1.10	914	36	1578.0	62.1	5	852	1,878	●
	K90	1.07	1.40	1067	42	1578.0	62.1	5	913	2,013	●
	K90	1.22	1.60	1219	48	1578.0	62.1	6	1007	2,220	●
	K90	1.38	1.80	1372	54	1578.0	62.1	6	1084	2,389	◐
Heavy Duty Rock	K90	0.54	0.70	610	24	1578.0	62.1	3	731	1,612	●
	K90	0.77	1.00	762	30	1578.0	62.1	4	828	1,826	●
	K90	0.84	1.10	914	36	1578.0	62.1	5	922	2,033	●
	K90	1.07	1.40	1067	42	1578.0	62.1	5	992	2,187	●
Heavy Duty Power	K90	0.84	1.10	914	36	1404.0	55.3	5	843	1,858	●
	K90	0.99	1.30	1067	42	1404.0	55.3	5	902	1,989	●
	K90	1.15	1.50	1219	48	1404.0	55.3	6	1003	2,211	●
Ditch Cleaning	N/A	0.99	1.30	1524	60	1143.0	45.0	—	736	1,623	●
	N/A	1.24	1.62	1830	72	1143.0	45.0	—	844	1,861	●

Assumptions for maximum material density rating:

1. Front linkage fully extended at ground line
2. Bucket curled
3. 100% bucket fill factor

* Based on SAE J296, some calculations of capacity specs fall on borderlines. Rounding may allow two buckets to have the same English rating, but different metric ratings.

- 2100 kg/m³ (3,500 lb/yd³) max material density
- 1800 kg/m³ (3,000 lb/yd³) max material density

Bucket Specifications and Compatibility

Bucket Type	Adaptor	Capacity*		Width		Tip Radius		Teeth	Total Weight		Mass Boom Stick
		m³	yd³	mm	in	mm	in	Qty	kg	lb	M2.5DB
DB Family Buckets											
General Purpose	K100	0.94	1.23	762	30	1753.4	69.0	3	993	2,189	●
	K100	1.19	1.56	914	36	1753.4	69.0	4	1088	2,398	●
	K100	1.46	1.91	1067	42	1753.4	69.0	5	1200	2,646	●
	K100	1.73	2.26	1219	48	1753.4	69.0	5	1288	2,839	◐
	K100	2.00	2.62	1372	54	1753.4	69.0	6	1401	3,089	○
	K100	2.27	2.97	1524	60	1753.4	69.0	7	1515	3,339	∴
	K100	2.55	3.34	1676	66	1753.4	69.0	7	1602	3,532	∴
Heavy Duty	K110	0.74	0.97	762	30	1779.1	70.0	3	1070	2,358	●
	K110	0.95	1.24	914	36	1779.1	70.0	4	1216	2,682	●
	K110	1.18	1.54	1067	42	1779.1	70.0	4	1310	2,889	●
	K110	1.41	1.84	1219	48	1779.1	70.0	5	1441	3,178	●
	K110	1.64	2.15	1372	54	1779.1	70.0	5	1539	3,393	◐
	K110	1.87	2.45	1524	60	1779.1	70.0	6	1672	3,686	○
	K110	2.10	2.75	1676	66	1779.1	70.0	7	1805	3,979	∴
	K110	2.34	3.06	1829	72	1779.1	70.0	7	1904	4,197	∴
Heavy Duty Rock	K110	0.74	0.97	762	30	1779.1	70.0	3	1131	2,493	●
	K110	0.95	1.24	914	36	1779.1	70.0	4	1293	2,849	●
	K110	1.18	1.54	1067	42	1779.1	70.0	4	1400	3,086	●
	K110	1.41	1.84	1219	48	1779.1	70.0	5	1547	3,411	●
	K110	1.64	2.15	1372	54	1779.1	70.0	5	1660	3,659	○
Heavy Duty Power	K110	0.95	1.24	914	36	1681.8	66.2	4	1192	2,628	●
	K110	1.40	1.83	1219	48	1681.8	66.2	5	1421	3,132	●
	K110	1.63	2.13	1372	54	1681.8	66.2	5	1518	3,346	◐
	K110	1.86	2.43	1524	60	1681.8	66.2	6	1650	3,637	○
Ditch Cleaning	N/A	1.63	2.13	1524	60	1410.0	55.5	—	1088	2,399	◐
	N/A	1.91	2.50	1830	72	1410.0	55.5	—	1217	2,683	○

Assumptions for maximum material density rating:

1. Front linkage fully extended at ground line
2. Bucket curled
3. 100% bucket fill factor

* Based on SAE J296, some calculations of capacity specs fall on borderlines.
Rounding may allow two buckets to have the same English rating, but different metric ratings.

- 2100 kg/m³ (3,500 lb/yd³) max material density
- 1800 kg/m³ (3,000 lb/yd³) max material density
- 1500 kg/m³ (2,500 lb/yd³) max material density
- ∴ 1200 kg/m³ (2,000 lb/yd³) max material density

324D L Work Tool Matching Guide

Boom Options		Reach Boom 5.9 m (19'4")		Mass Boom 5.3 m (17'5")
Stick Options	R3.6B1 (11'10")	R2.95CB1 (9'8")	R2.5CB1 (8'2")	M2.5DB (8'2")
Hydraulic Hammer	H120Cs/ H130s/ H140Ds	H120Cs/ H130s/ H140Ds	H120Cs/ H130s/ H140Ds	H120Cs/ H130s/ H140Ds
Multi-Processor	MP15/MP20	MP15/MP20 MP30	MP15/MP20	N/A N/A
360° Scrap Shear	S320	S320 S340	S320	S320 N/A
Mechanical Shear	S115	S115	S115	S115
Mechanical Pulverizer	P115	P120	P120	P120
Trash Grapple**	Available as field installed attachment only			
Contractors' Grapple**	Available as field installed attachment only			
Rotating Sorting/Demolition Grapple	G315	G315	G315	G315
Vibratory Plate Compactor	CVP110	CVP110	CVP110	CVP110
Hydraulic Thumb**	Available as field installed attachment only			
Dedicated Quick Coupler**	Available as field installed attachment only			
Pin-Grabber Quick Coupler	Available as factory or field installed attachment			N/A

* S325 only without PG Coupler.

** Contact Cat Work Tools for availability and proper matching.

Reach Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



















Load at
Maximum Reach

BOOM – 5.9 m (19'4")
R3.6B1 STICK – 3.6 m (11'10")

BUCKET – 1067 mm (42") HDP
with General Duty Tips
902 kg (1,989 lb)

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

















	1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)				m ft
															
7.5 m 25.0 ft	kg								*3000	*3000			*2550	*2550	8.23
	lb								*6,200	*6,200			*5,500	*5,500	26.74
6.0 m 20.0 ft	kg								*4550	4350			*2750	*2750	8.98
	lb								*9,750	9,300			*6,000	*6,000	29.34
4.5 m 15.0 ft	kg						*12,100	*12,100	*5250	4200	*3800	2950	*2850	2650	9.41
	lb						*26,700	*26,700	*11,400	8,950	*8,300	6,250	*6,250	5,900	30.82
3.0 m 10.0 ft	kg				*8950	*8950	*6900	5900	*5900	4000	4600	2800	*3100	2500	9.57
	lb				*19,200	*19,200	*14,900	12,700	*12,800	8,550	*9,600	6,000	*6,800	5,450	31.41
1.5 m 5.0 ft	kg				*11 850	8700	*8300	5550	6150	3800	4500	2700	*3400	2400	9.61
	lb				*25,500	18,750	*17,950	11,900	13,150	8,150	9,600	5,800	*7,450	5,250	31.52
Ground Line	kg				*13 500	8250	8600	5250	5950	3650	4400	2650	*3750	2400	9.46
	lb				*29,100	17,650	18,500	11,250	12,750	7,800	9,400	5,600	*8,250	5,250	31.03
-1.5 m -5.0 ft	kg		*7450	*7450	*13 800	8050	8450	5100	5850	3550	4350	2600	4300	2550	9.06
	lb		*17,050	*17,050	*29,850	17,300	18,100	10,900	12,550	7,550			9,450	5,650	29.69
-3.0 m -10.0 ft	kg		*13 250	*13 250	*13 150	8100	8400	5050	5850	3500			4900	2950	8.36
	lb		*30,200	*30,200	*28,400	17,350	18,000	10,850	12,500	7,550			10,900	6,550	27.32
-4.5 m -15.0 ft	kg		*15 750	*15 750	*11 450	8250	*8500	5150					6250	3850	7.25
	lb		*33,850	*33,850	*24,550	17,700	*18,150	11,050					14,050	8,550	23.58
-6.0 m -20.0 ft	kg														
	lb														

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

BOOM – 5.9 m (19'4")
R2.95CB1 STICK – 2.95 m (9'8")

BUCKET – 914 mm (36") HD
with General Duty Tips
982 kg (2,165 lb)

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

	1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)				m ft
															
7.5 m 25.0 ft	kg												*3250	*3250	7.29
	lb												*6,950	*6,950	23.65
6.0 m 20.0 ft	kg								*5100	4200			*3650	3600	8.12
	lb								*10,550	9,000			*8,050	*8,050	26.51
4.5 m 15.0 ft	kg						*6350	6150	*5800	4100			*3900	3150	8.59
	lb						*13,800	13,150	*12,650	8,750			*8,500	6,950	28.12
3.0 m 10.0 ft	kg				*10 400	9200	*7650	5800	6300	3950			*4050	2800	8.94
	lb				*22,300	19,800	*16,500	12,400	13,450	8,400			*8,900	6,200	29.30
1.5 m 5.0 ft	kg				*12 950	8450	8850	5450	6100	3750	4450	2700	*4350	2700	9.03
	lb				*27,850	18,200	18,950	11,650	13,050	8,050			*9,600	5,900	29.63
Ground Line	kg				*13 850	8150	8550	5200	5950	3650			4500	2750	8.86
	lb				*29,950	17,500	18,350	11,150	12,750	7,750			9,950	6,000	29.07
-1.5 m -5.0 ft	kg		*7150	*7150	*13 600	8100	8450	5100	5850	3550			4900	2950	8.43
	lb		*16,600	*16,600	*29,450	17,400	18,100	10,950	12,600	7,650			10,750	6,500	27.63
-3.0 m -10.0 ft	kg		*15 900	*15 900	*12 450	8200	8500	5100	5900	3600			5700	3500	7.66
	lb		*36,250	*36,250	*26,950	17,600	18,200	11,000					12,700	7,700	25.04
-4.5 m -15.0 ft	kg				*10 150	8450	*7500	5300					*6650	4750	6.42
	lb				*21,700	18,100	*15,700	11,400					*14,600	10,700	20.82

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Reach Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



Load at
Maximum Reach

BOOM – 5.9 m (19'4")
R2.95CB1 STICK – 2.95 m (9'8")

BUCKET – No Bucket
Bare Quick Coupler

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

	1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m ft
7.5 m 25.0 ft	kg lb										*3650 *7,950	*3650 *7,950	6.61 21.34
6.0 m 20.0 ft	kg lb								*4550 *4550	*4550 *4550	*4050 *8,950	*4050 *8,950	7.67 24.99
4.5 m 15.0 ft	kg lb						*6550 *14,200	6400 13,800	*6100 *13,050	4450 9,500	*4150 *9,100	3700 8,150	8.33 27.25
3.0 m 10.0 ft	kg lb		*6600 *14,950	*6600 *14,950	*9850 *21,150	9450 20,400	*7700 *16,650	6050 13,000	6550 14,100	4250 9,100	*4400 *9,650	3350 7,300	8.68 28.44
1.5 m 5.0 ft	kg lb		*5900 *12,900	*5900 *12,900	*6900 *15,550	*6900 *15,550	*8900 *19,250	5650 12,200	6350 13,650	4050 8,650	*4900 *10,700	3150 6,950	8.75 28.71
Ground Line	kg lb		*6150 *13,350	*6150 *13,350	*6200 *13,800	*6200 *13,800	*8550 18,750	5400 11,600	6200 13,300	3900 8,350	5050 11,150	3200 7,000	8.56 28.09
-1.5 m -5.0 ft	kg lb	*7950 *17,700	*7950 *17,700	*5950 *13,100	*5950 *13,100	*6100 *13,500	*6100 *13,500	*8000 *18,050	5250 11,300	6100 13,100	3800 8,150	5450 12,050	8.09 26.51
-3.0 m -10.0 ft	kg lb	*6550 *14,350	*6550 *14,350	*5850 *12,800	*5850 *12,800	*6250 *13,900	*6250 *13,900	*8350 18,400	5250 11,250			6400 14,150	7.28 23.78
-4.5 m -15.0 ft	kg lb			*5900 *13,050	*5900 *13,050	*6800 *15,250	*6800 *15,250					*8350 *18,450	5.99 19.39

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



Load at
Maximum Reach

BOOM – 5.9 m (19'4")
R2.5CB1 STICK – 2.5 m (8'2")

BUCKET – 914 mm (36") HD
with General Duty Tips
982 kg (2,165 lb)

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

	1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m ft
7.5 m 25.0 ft	kg lb										*3150 *6,750	*3150 *6,750	6.76 21.88
6.0 m 20.0 ft	kg lb						*6100 *13,350	*6100 *13,350			*4450 *9,550	4050 9,000	7.65 24.97
4.5 m 15.0 ft	kg lb				*8400 *18,050	*8400 *18,050	*6900 *14,950	6050 13,000	*6200 *13,550	4050 8,700	*5450 *11,950	3450 7,650	8.15 26.67
3.0 m 10.0 ft	kg lb						*8100 *17,500	5700 12,250	6250 13,400	3900 8,400	5000 11,000	3100 6,800	8.52 27.94
1.5 m 5.0 ft	kg lb						8750 18,800	5400 11,550	6100 13,050	3750 8,050	4800 10,600	2950 6,450	8.62 28.29
Ground Line	kg lb						8550 18,350	5200 11,150	5950 12,750	3650 7,800	4900 10,800	3000 6,550	8.45 27.72
-1.5 m -5.0 ft	kg lb				*13 250 *28,750	8150 17,500	8500 18,200	5150 11,000	5900 12,700	3600 7,750	5350 11,800	3250 7,200	7.99 26.20
-3.0 m -10.0 ft	kg lb		*14 900 *32,500	*14 900 *32,500	*11 850 *25,600	8300 17,800	8550 18,350	5200 11,150			6450 14,250	3950 8,750	7.18 23.43
-4.5 m -15.0 ft	kg lb				*9050 *19,250	8550 18,400					*6700 *14,650	5700 12,850	5.82 18.82

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Reach Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



Load at
Maximum Reach

BOOM – 5.9 m (19'4")
R2.5CB1 STICK – 2.5 m (8'2")

BUCKET – No Bucket
Bare Quick Coupler

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m ft
7.5 m 25.0 ft	kg lb							*3600 *13,300	*3600 *13,300			*3600 *7,750	*3600 *7,750	6.03 19.40
6.0 m 20.0 ft	kg lb							*6350 *13,300	*6350 *13,300			*4450 *9,650	*4450 *9,650	7.18 23.37
4.5 m 15.0 ft	kg lb							*7050 *15,350	6350 13,650	*6500 *14,200	4400 9,450	*5650 *12,450	4050 8,950	7.88 25.77
3.0 m 10.0 ft	kg lb					*9050 *20,850	*9050 20,000	*8200 *17,700	6000 12,850	6550 14,100	4250 9,050	5650 12,400	3650 8,000	8.25 27.03
1.5 m 5.0 ft	kg lb					*6550 *14,650	*6550 *14,650	9000 19,350	5650 12,100	6350 13,650	4050 8,700	5400 11,900	3450 7,600	8.32 27.32
Ground Line	kg lb			*6850 *14,700	*6850 *14,700	*6050 *13,450	*6050 *13,450	*8600 18,750	5400 11,600	6200 13,350	3900 8,400	5500 12,150	3500 7,650	8.13 26.66
-1.5 m -5.0 ft	kg lb			*6150 *13,400	*6150 *13,400	*6050 *13,400	*6050 *13,400	*8250 18,500	5300 11,350	6150	3850	6000 13,250	3800 8,300	7.63 24.99
-3.0 m -10.0 ft	kg lb			*5850 *12,850	*5850 *12,850	*6300 *14,050	*6300 *14,050	8650 18,600	5350 11,450			7250 16,050	4500 10,000	6.76 22.06
-4.5 m -15.0 ft	kg lb			*5950 *13,200	*5950 *13,200	*7200 *16,250	*7200 *16,250					*8850 *19,550	6550 14,750	5.34 17.23

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Super Long Reach Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



Load at
Maximum Reach

BOOM – 10.2 m (33'6")

STICK – 7.85 m (25'9")

BUCKET – 1142 mm (45")

Ditch Cleaning Bucket
291 kg (642 lb)

SHOES – 800 mm (32") triple grouser

UNDERCARRIAGE – Long

HEAVY LIFT – On

		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)				m ft
12.0 m 40.0 ft	kg lb													*800 *1,750	*800 *1,750	14.52 47.18
10.5 m 35.0 ft	kg lb													*750 *1,650	*750 *1,650	15.50 50.53
9.0 m 30.0 ft	kg lb													*750 *1,600	*750 *1,600	16.27 53.16
7.5 m 25.0 ft	kg lb													*750 *1,600	*750 *1,600	16.87 55.20
6.0 m 20.0 ft	kg lb													*750 *1,600	*750 *1,600	17.30 56.69
4.5 m 15.0 ft	kg lb													*750 *1,650	*750 *1,650	17.60 57.69
3.0 m 10.0 ft	kg lb											*3150 *6,750	*3150 *6,750	*800 *1,750	*800 *1,750	17.75 58.23
1.5 m 5.0 ft	kg lb					*3400 *8,000	*3400 *8,000	*6050 *13,000	*6050 *13,000	*4550 *9,750	*4550 *9,750	*3650 *7,900	3600 7,700	*850 *1,800	*850 *1,800	17.77 58.31
Ground Line	kg lb			*900 *2,000	*900 *2,000	*2600 *6,000	*2600 *6,000	*6350 *14,200	5500 11,850	*5200 *11,250	4150 8,950	*4150 *8,950	3250 6,950	*900 *1,950	*900 *1,950	17.66 57.94
-1.5 m -5.0 ft	kg lb			*1550 *3,500	*1550 *3,500	*2800 *6,400	*2800 *6,400	*5350 *12,100	5100 10,950	*5750 *12,400	3800 8,200	*4550 *9,800	3000 6,400	*1000 *2,150	950 2,050	17.41 57.12
-3.0 m -10.0 ft	kg lb	*1850 *4,100	*1850 *4,100	*2250 *5,050	*2250 *5,050	*3350 *7,550	*3350 *7,550	*4800 *10,950	*4800 *10,450	*6100 *13,150	3600 7,700	4750 *10,150	2800 6,000	*1100 *2,350	950 2,100	17.03 55.81
-4.5 m -15.0 ft	kg lb	*2500 *5,600	*2500 *5,600	*3000 *6,700	*3000 *6,700	*3900 *8,600	*3900 *8,600	*4750 *10,750	*4750 *10,300	6000 12,850	3500 7,450	4600 9,900	2700 5,750	*1200 *2,700	1000 2,250	16.49 53.99
-6.0 m -20.0 ft	kg lb	*3200 *7,150	*3200 *7,150	*3750 *8,450	*3750 *8,450	*3900 *8,600	*3900 *8,600	*5000 *11,300	4800 10,350	5950 12,800	3450 7,400	4550 9,800	2650 5,650	*1400 *3,100	1100 2,450	15.78 51.60
-7.5 m -25.0 ft	kg lb	*3950 *8,850	*3950 *8,850	*3950 *8,650	*3950 *8,650	*3950 *8,650	*3950 *8,650	*5450 *12,300	4900 10,500	6000 12,900	3500 7,500	4550 9,800	2650 5,700	*1700 *3,750	1250 2,750	14.88 48.54
-9.0 m -30.0 ft	kg lb	*3950 *8,700	*3950 *8,700	*3900 *8,600	*3900 *8,600	*4500 *10,250	*4500 *10,250	*6000 *13,550	5050 10,850	*6000 *12,900	3600 7,700	4650 10,000	2700 5,850	*2100 *4,700	1450 3,300	13.75 44.69
-10.5 m -35.0 ft	kg lb			*4000 *9,300	*4000 *9,300	*5450 *12,400	*5450 *12,400	*6650 *14,650	5250 11,350	*5550 *11,850	3750 8,050	*4550 *9,750	2850 6,150	*2800 *6,400	1850 4,150	12.31 39.80
-12.0 m -40.0 ft	kg lb					*6400 *14,450	*6400 *14,450	*5850 *12,350	5550 12,050	*4750 *10,000	3950 8,600	*3850 *8,050	3050 6,600	*3100 *6,800	2500 5,750	10.46 33.40
-13.5 m	kg															

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Super Long Reach Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side

















Load at
Maximum Reach

BOOM – 10.2 m (33'6")
STICK – 7.85 m (25'9")

BUCKET – 1142 mm (45")
Ditch Cleaning Bucket
291 kg (642 lb)

SHOES – 800 mm (32") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

	10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		15.0 m (50.0 ft)		16.5 m (55.0 ft)				m ft	
														
12.0 m 40.0 ft	kg lb											*800 *1,750	*800 *1,750	14.52 47.18
10.5 m 35.0 ft	kg lb							*1200 *2,000	*1200 *2,000			*750 *1,650	*750 *1,650	15.50 50.53
9.0 m 30.0 ft	kg lb							*1700 *3,400	*1700 *3,400			*750 *1,600	*750 *1,600	16.27 53.16
7.5 m 25.0 ft	kg lb					*1800 *3,900	*1800 *3,900	*1800 *3,950	1800 3,800	*1150 *1,750	*1150 *1,750	*750 *1,600	*750 *1,600	16.87 55.20
6.0 m 20.0 ft	kg lb					*1950 *4,200	*1950 *4,200	*1900 *4,150	1750 3,650	*1550 *2,850	1350 2,800	*750 *1,600	*750 *1,600	17.30 56.69
4.5 m 15.0 ft	kg lb			*2200 *4,800	*2200 *4,800	*2100 *4,550	2100 4,400	*2000 *4,350	1650 3,500	*1850 *3,550	1300 2,700	*750 *1,650	*750 *1,650	17.60 57.69
3.0 m 10.0 ft	kg lb	*2750 *5,950	*2750 *5,950	*2500 *5,350	2450 5,200	*2300 *4,950	1950 4,150	*2150 *4,650	1550 3,300	*2050 *4,100	1250 2,600	*800 *1,750	*800 *1,750	17.75 58.23
1.5 m 5.0 ft	kg lb	*3100 *6,750	2800 6,050	*2750 *5,950	2250 4,800	*2500 *5,400	1800 3,850	*2300 *4,950	1450 3,100	2050 4,350	1150 2,450	*850 *1,800	*850 *1,800	17.77 58.31
Ground Line	kg lb	*3450 *7,500	2600 5,550	*3000 *6,500	2100 4,450	*2700 *5,800	1700 3,600	2350 5,050	1350 2,900	2000 4,200	1100 2,350	*900 *1,950	*900 *1,950	17.66 57.94
-1.5 m -5.0 ft	kg lb	*3750 *8,150	2400 5,100	*3250 *6,950	1950 4,150	2700 5,800	1600 3,350	2300 4,850	1300 2,750	1950 4,100	1050 2,250	*1000 *2,150	950 2,050	17.41 57.12
-3.0 m -10.0 ft	kg lb	3800 8,150	2250 4,800	3150 6,700	1850 3,900	2600 5,600	1500 3,200	2200 4,750	1250 2,600	1900 *3,300	1050 2,150	*1100 *2,350	950 2,100	17.03 55.81
-4.5 m -15.0 ft	kg lb	3700 7,950	2150 4,600	3050 6,550	1750 3,750	2550 5,500	1450 3,050	2200 4,650	1200 2,550			*1200 *2,700	1000 2,250	16.49 53.99
-6.0 m -20.0 ft	kg lb	3650 7,850	2100 4,500	3000 6,450	1700 3,650	2550 5,450	1400 3,050	2200 4,650	1200 2,550			*1400 *3,100	1100 2,450	15.78 51.60
-7.5 m -25.0 ft	kg lb	3650 7,850	2100 4,500	3000 6,500	1700 3,700	2550 5,500	1450 3,050					*1700 *3,750	1250 2,750	14.88 48.54
-9.0 m -30.0 ft	kg lb	3700 8,000	2150 4,650	3050 6,600	1750 3,800	2600	1500					*2100 *4,700	1450 3,300	13.75 44.69
-10.5 m -35.0 ft	kg lb	*3800 *8,050	2250 4,900	*3100	1900							*2800 *6,400	1850 4,150	12.31 39.80
-12.0 m -40.0 ft	kg lb											*3100 *6,800	2500 5,750	10.46 33.40
-13.5 m	kg													

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Mass Boom Lift Capacities



Load Point
Height



Load Radius
Over Front



Load Radius
Over Side



Load at
Maximum Reach

BOOM – 5.3 m (17'5")
M2.5DB STICK – 2.5 m (8'2")

BUCKET – 1219 mm (48") HD
with General Duty Tips
1441 kg (3,177 lb)

SHOES – 790 mm (31") triple grouser
UNDERCARRIAGE – Long
HEAVY LIFT – On

		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m ft
7.5 m 25.0 ft	kg lb											*3800 *8,100	*3800 *8,100	6.13 19.77
6.0 m 20.0 ft	kg lb							*5900 *12,900	*5900 12,750			*4250 *9,250	*4250 *9,250	7.12 23.21
4.5 m 15.0 ft	kg lb							*6550 *14,200	5700 12,250			*4500 *9,900	3500 7,750	7.65 25.05
3.0 m 10.0 ft	kg lb					*10 100 *21,650	8950 19,250	*7600 *16,400	5400 11,550	5850 12,550	3500 7,450	*4900 *10,750	3100 6,850	7.95 26.04
1.5 m 5.0 ft	kg lb					*12 550 *27,000	8200 17,600	8500 18,200	5050 10,850	5700 12,200	3350 7,150	5000 11,000	2900 6,400	8.05 26.42
Ground Line	kg lb					*13 450 *29,000	7850 16,850	8250 17,650	4850 10,350	5600 11,950	3250 6,950	5150 11,300	2950 6,550	7.87 25.83
-1.5 m -5.0 ft	kg lb			*11 650 *27,250	*11 650 *27,250	*12 950 *28,050	7850 16,750	8150 17,500	4750 10,200			5750 12,650	3350 7,350	7.38 24.18
-3.0 m -10.0 ft	kg lb			*15 100 *32,750	*15 100 *32,750	*11 300 *24,300	7950 17,100	*8100 *17,250	4850 10,450			*7050 *15,550	4300 9,550	6.48 21.12
-4.5 m -15.0 ft	kg lb													

* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

Electrical

- 65 Ampere alternator
- Base machine light (frame)
- Lights, cab mounted (Two)
- Horn
- Pre-start monitoring system – checks for low fluids (engine oil, coolant, hydraulic oil) prior to starting machine

Operator Environment

- Air conditioner, heater, defroster with automatic climate control
- AM/FM Radio with antenna and 2 speakers
- Ashtray with 24 volt lighter
- Beverage/cup holder
- Bolt-on Falling object Guarding System (FOGS) capability
- Cab Glass
 - Openable and retractable two-piece front windshield
 - Skylight, pop-up, polycarbonate
- Coat hook
- Floor mat
- Instrument panel and gauges
- Joysticks, console mounted, pilot operated
- Light, interior
- Literature compartment
- Monitor, full graphic color display
- Neutral lever (lock out) for all controls
- Polycarbonate side windows
- Positive filtered ventilation
- Pressurized cab
- ROPS cab
- Seat, suspension, with high back and head rest
- Seat belt, retractable – 76 mm (3 in)
- Storage compartment suitable for lunch box cooler
- Sun shade (for skylight)
- Travel control pedals with removable hand levers
- Windshield wiper and washer (upper and lower)

Engine/Power Train

- C7 with ACERT™ Technology
- Air intake heater
- Air-to-air aftercooler (ATAAC)
- 24 volt electric start
- Hydraulic electronic unit injectors (HEUI)
- 2300 m (7,500 ft) altitude capability without derate
- Automatic engine speed control with one touch low idle
- Cooling
 - Protection of 43° C (110° F) to –18° C (0° F) at 50% concentration
- Electric priming pump
- Straight line travel
- Two-speed auto-shift travel
- Water separator in fuel line
 - Water level indicator for water separator

Undercarriage

- Grease lubricated track
- Hydraulic track adjusters
- Idler and center section track guards

Other Standard Equipment

- Automatic swing parking brake
- Auxiliary hydraulic valve
- Capability of stackable valves (max of 3) for main valve
- Capability of auxiliary circuit
- Counterweight with lifting eyes
- Door locks, cap locks and Caterpillar® one key security system
- Fine swing control
- Fully pressurized hydraulic system
- Heavy lift
- Mirrors (frame-right, cab left)
- S•O•SSM quick sampling valves for engine and hydraulic oil
- Travel alarm
- Product Link PL321SR

Optional Equipment

Optional equipment may vary. Consult your Cat dealer for details.

Front Linkage

Booms

Reach 5.9 m (19 ft 4 in)

Mass 5.3 m (17 ft 5 in)

Super Long Reach 10.2 m (33 ft 6 in)

Sticks

Reach 3.6 m (11 ft 10 in)

Reach 2.95 m (9 ft 8 in)

Reach 2.5 m (8 ft 2 in)

Mass 2.5 m (8 ft 2 in)

Super Long Reach 7.85 m (25 ft 9 in)

Bucket Linkage

B1 Family

CB1 Family

DB Family

Boom Lowering Control Device

Electrical

Machine Security System

Power supply (12V-10 AMP)

Guarding

Falling Object Guarding System (FOGS)

Front windshield guard

Full length, wire mesh

Heavy-duty bottom guards

Rubber bumpers

Track guiding guards

Sprocket end, idler end guard

Two-piece full length (center guard removed)

Vandalism guards

Operator Environment

Hand control pattern changer (ISO-SAE)

Rear window, secondary exit

Sunscreen – roller type

Seat, high back with air suspension and heater

Third pedal, straight travel

Engine/Power Train

High ambient cooling

For conditions up to 52° C (125° F)

Prefilter, air

Starting, Cold weather package

Two additional maintenance free batteries

High capacity starter motor

Heavy-duty cable

Jump-start receptacle

Ether aid

Block heater

Undercarriage

Track shoes

600 mm (24 in) double grouser

790 mm (31 in) triple grouser

800 mm (32 in) Heavy-duty triple grouser

Heavy-duty rollers

Auxiliary Hydraulics

Hammer Circuit

For single function (1 way/2 pump) hydraulic tools

Thumb Circuit

For double function (2 way/1 pump) hydraulic tools

Tool Control System

For single or double function, (1 or 2 way, 1 or 2 pump) hydraulic tools

Joysticks with additional switches

Program up to 10 tools in memory

Capability of adding medium pressure

Medium pressure circuit for tools requiring medium pressure

Hydraulic pin grabber quick coupler and controller

Lines for booms and sticks

Work Tools

Wide offering of buckets, tips and sidecutters

324D L Hydraulic Excavator



For more complete information on Cat products, dealer services,
and industry solutions, visit us on the web at www.cat.com

© 2010 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Caterpillar dealer for available options.

AEHQ6093 (5-10)

(D-ROPS) *

NACD

CAT, CATERPILLAR, ACERT, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow"
and the "Power Edge" trade dress, as well as corporate and product identity used
herein, are trademarks of Caterpillar and may not be used without permission.

CATERPILLAR®