

# DYNAPAC



Part of the Atlas Copco Group

## CA134D

### Single drum vibratory rollers



#### Technical data

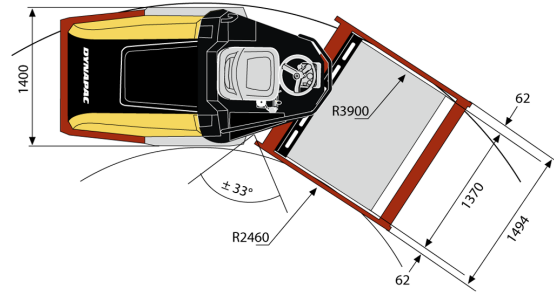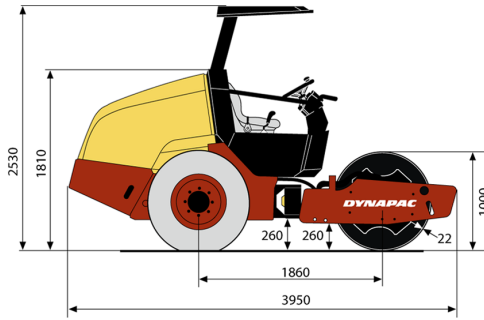

		<b>CA134D</b>
<b>Masses</b>		
Max. operating mass		5,500 kg
Operating mass (incl. ROPS)		4,550 kg
Module mass (front/ rear)		1,800/ 2,750 kg
<b>Traction</b>		
Speed range (km/ h)		0 - 6
Vertical oscillation		±9°
Tyre size (8 ply)		12,5-20
Theor. gradeability		55 %
<b>Compaction</b>		
Static linear load		13.0 kg/ cm
Centrifugal force		89 kN
Nominal amplitude		1.7 mm
Vibration frequency		35 Hz
<b>Engine</b>		
Manufacturer/ Model	John Deere 5030 HF285	
Type	Water cooled turbo Diesel with After Cooler	
Rated power, SAE J1995	62 kW (84 hp) @ 2,800 rpm	
Fuel tank capacity	117 l	
<b>Hydraulic system</b>		
Driving	Axial piston pump with variable displacement. Axial piston motor with variable displacement. Axial piston motor with constant displacement. Gear pump/ motor with constant displacement.	
Vibration	Gear pump with constant displacement.	
Steering	Hydrostatic in forward and reverse lever.	
Service brake	Failsafe multidisc brake in rear axle and front drum motor.	
Parking/ Emergency brake		

Find your local dealer at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

ca134d\_en-20100426.143731.pdf 2010-04-26 14:37