

CHARACTERISTICS

	H15D	H20DL
Load center	500 mm	500 mm
Capacity	1.500 Kg	2.000 Kg
Wheels	Pneumatics 10 x 16,5 / 10PR NHS	
Driving wheels	Avaliable 2WD y 4WD	
Gradeability	35% without load 30% loaded	
Total weighth	2.570 Kg	3.090 Kg
Transmission	Hydrostatic HP	
Engine	2WD: PERKINS 403C 11 4WD: PERKINS 404C. 15	PERKINS 404C. 15 (Optional) KUBOTA V1503T

AVAILABLE MASTS

- 2700 mm two-stage mast (2090 mm retracted)
- 3300 mm two-stage mast (2350 mm retracted)
- Three-stage mast, 3700 mm free lift (1970 mm retracted)
- Three-stage mast, 4300 mm free lift (2160 mm retracted)



COMPACT RANGE
Versatility

mast[®]
EXPLORER

H15D - H20DL

"A improved product that will allow you to achieve high productivity and an improvement in the quality of the work".

Rough terrain forklift trucks
2WD - 4WD

www.mecanococontinental.com

Certified ISO 9001 by






LL/P7132 LL/P7133
LL/P7134 LL/P7135

TECHNICAL SPECIFICATIONS

	H15D	H20DL
Total length	A 3.850 mm	3.950 mm
Distance between axles	B 1.485 mm	1.485 mm
Total width	C 1.400 mm	1.470 mm
Total height	D 2.000 mm	2.000 mm
Height of driver's seat	E 1.030 mm	1.030 mm
Ground clearance	F 2WD: 300 mm / 4WD: 270mm	
Height from seat to roof	G 970 mm	970 mm
Length to fork carriage	H 2.650 mm	2.650 mm
Turning radius	I 2WD: 2.400 mm / 4WD: 3.300 mm	
Aisle width	J 3.450 mm	3.475 mm

Due to our commitment to continually improve our products, all technical specifications included in our catalog are subject to modification without prior notice.

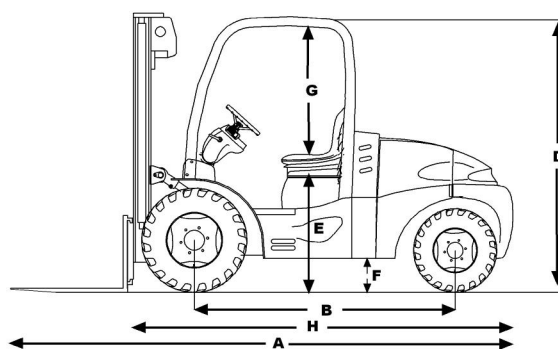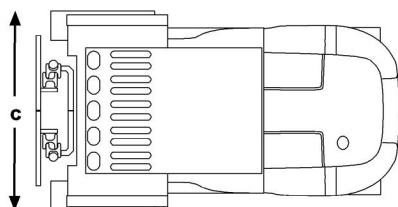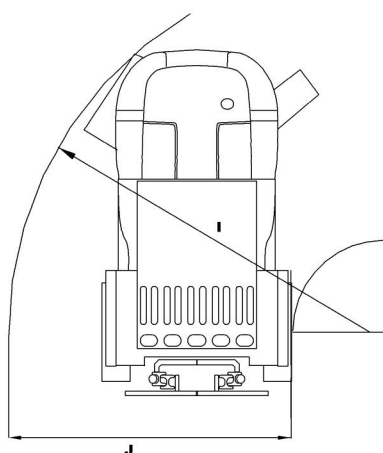

STANDARD FEATURES

- 5-function hydraulic joystick
- Full road lights
- Hinged wing mirrors.
- Automatic starter.
- 1200 mm forks.
- **Comer** differential axles with mechanical parking brake and oil-bathed disc service brake.
- **HP** automotive hydrostatic transmission with top-quality variable displacement pump.
- **Parker** double-barrel gear pump.
- Cooling system for the hydrostatic transmission that is totally independent from the engine.
- Additional filter system in hydraulic tank.
- **Sauer-Danfoss** power steering.

ERGONOMICS

- Fully adjustable steering column, both height and depth.
- Comfortable seat with seat belts.

SAFETY

- Emergency stop.
- Interior exhaust vent.
- Soundproofed cabin compartment.
- Maximum chassis robustness and resistance.

SIMPLICITY

- No electronic elements.
- Machine components easily accessible, thereby guaranteeing quick maintenance.
- Components of well-known worldwide prestige.
- No plastic elements

VERSATILITY

- Three-stage masts with 4 cylinders and integrated side shifter for maximum visibility.
- Wide range of attachments available.
- Large variety of masts.

Authorized dealer