


ALP-Personnel-Lifts PHC-Series

as at 07/2010

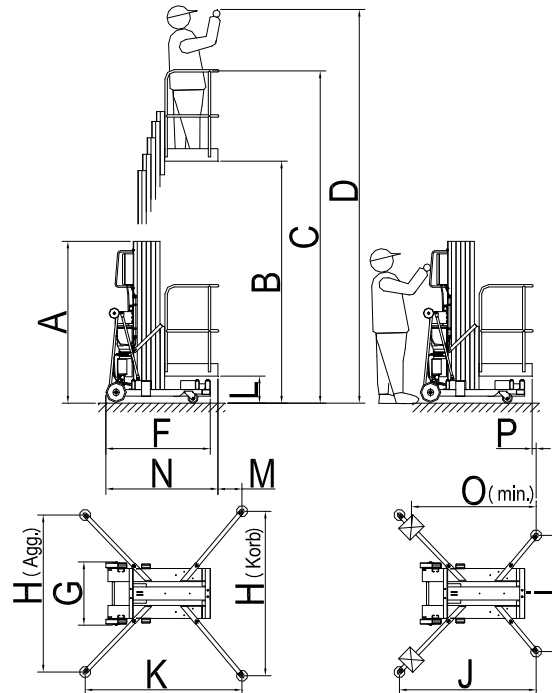

	Notes \ Type		650	800	940	1100	1200
D	Working height	m	6,50	8,00	9,45	10,85	12,00
B	Platform height	m	4,50	6,00	7,45	8,85	10,00
	Platform capacity	kg	140	140	140	140	135
A	Height	m	1,98	1,98	1,98	1,98	1,98
G	Width	m	0,77	0,77	0,77	0,77	0,77
N	Length	m	1,26	1,32	1,38	1,44	1,44
H x K	Outrigger footprint inside	m x m	1,25 x1,26	1,41 x1,39	1,53 x1,50	1,74 x1,78	2,04 x2,05
H x K	Outrigger footprint inside with ballast weights	m x m	1,25 x1,26	1,25 x1,26	1,25 x1,26	1,41 x1,49	1,61 x1,67
H x K	Outrigger footprint outside	m x m	2,04 x1,95	2,43 x2,28	2,73 x2,55	3,24 x3,10	3,67 x3,47
I x J	Outrigger footprint outside in wall application	m x m	1,25 x1,62	1,41 x1,86	1,53 x2,05	1,74 x2,46	2,04 x2,79
M	Wall distance	cm	9	10	9	21	34
	Approx. extension speed	sec	28	26	21	26	26
	Deadweight (without ballast weights)	kg	250	280	300	330	345
	Deadweight (with ballast weights)	kg	294	354	384	414	429

All rights reserved for changes in dimensions and construction!