

H.A.B Model S 124 – 10 E2WD

Features:

- Driveable in full height
- CE – certified components
- Fold – Down Guard Rails
- User-friendly control system
- Max. stability due to three - scissors mechanism
- Unlimited platform capacity on platform and extension
- Narrow design
- All proportional drive, lift and lowering functions



Technical Features

Working height	12.40 m
Platform height	10.40 m
Platform size	2.49 m x 0.98 m
Lateral platform extension	1.20 m
Clearance height	1.92 – 2.59 m
Platform capacity	350 kg
Outer turning radius	2.48 m
Inner turning radius	0.10 m
Engine	electro
Drive speed in km/h (l/e) *	4.5 0.7
Diesel	-
Lifting time	ca. 39 Sec.
Lowering time	ca. 39 Sec.
Ground clearance	100 mm
Wheelbase	2.00 m
Max. inclination	2 °
Control	Proportional
Greadability	ca. 25%
Weight	2860 kg
Max. ground bearing pressure	69 N/cm ²
Driveable in full height	Yes
External using	No
4 WD	No
4 WS	No
Self-levelling Jacks	No

Transport Features

Stowed height	1.92 m
Length	2.71 m
Width	0.98 m

*e=elevated; l=lowered

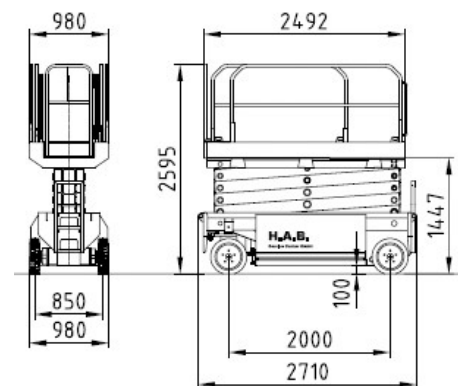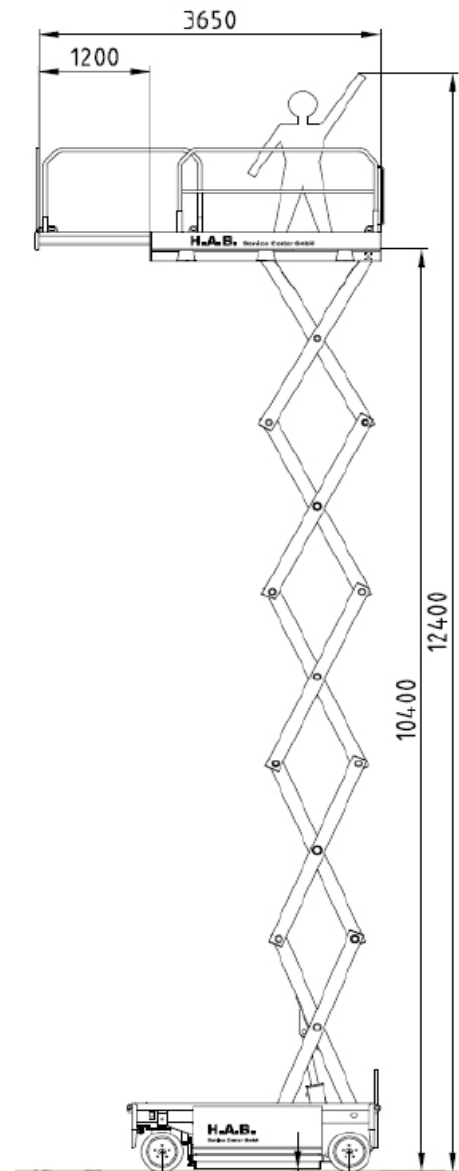

H.A.B.

H.A.B. Service Center GmbH
Heidigstrasse 17
76709 Kronau

Telefon: +49 (0) 7253 / 94 01 – 0
Telefax: +49 (0) 7253 / 94 01 – 26
service@hab-hubarbeitsbuehnen.de