



#### TS TRENCH DIGGING HEAD

For regenerating and cleaning out trenches or sluices excavated in the ground.



#### TR DRILLING HEAD

For small drilling jobs.



#### TW SNOW CUTTER HEAD

For cleaning footpaths, cycle paths and heaped snow from walls at the side of the road.



#### TT BRANCH CUTTING HEAD

For clean cutting branches and hedges.



ASSALONI.COM S.p.A. 40042 Lizzano in Belvedere (BO) - Italy - Via Luigi Assaloni, 4  
Tel. +39-0534 51353 - Fax +39-0534 51583 info@assaloni.com www.assaloni.com



MOD. BFA - GB - Rev.1 04/11 The technical data are informative and not binding



## BFA GRASS CUTTER WITH FRONT ARM

BFA/30

BFA/301TE

BFA/50




[www.assaloni.com](http://www.assaloni.com)




WORKING RANGE

Consents to take the more difficult positions at the rim of the wheel of the vehicle.

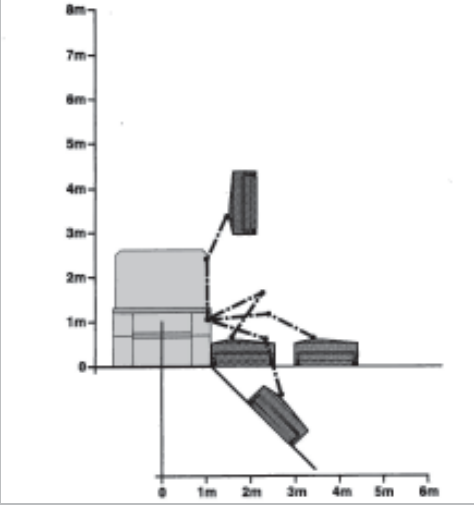


WORKING POSITION ADVANCE

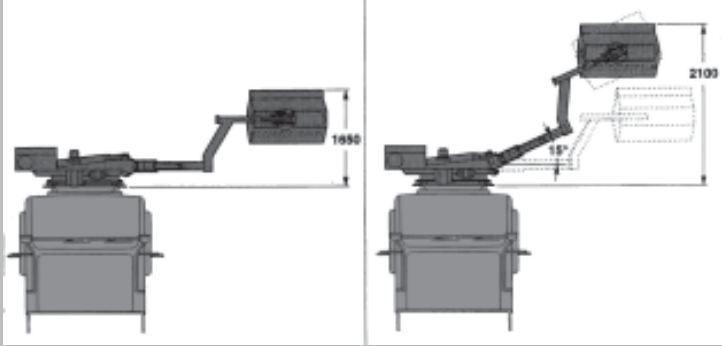

CONFIGURATION IN TRANSFER

The special design permits the road traffic homologation. It's completely folded and doesn't obstruct the field of operator vision.

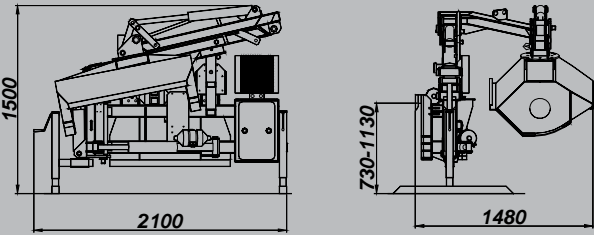

TECHNICAL DATA	BFA/30	BFA/301TE	BFA/50	
Extension maximale horizontale (à partir du centre du véhicule)	4200	4200	5200	mm
Work side	right	right	right	
All purpose cutter head width	1350	1350	1200	mm
No. of rounds of the knives-holder roller	2000	2000	2000/2500	rpm
Oil tank capacity	140	140	140	lt
Working pressure	160	160	250	bar
Max. input	50	35	31	kw
Weight	1000	950	1060	kg



# BFA GRASS CUTTER WITH FRONT ARM

BFA/30

BFA/301TE

BFA/50

Front arm applicable to the front coupling plate of medium and heavy-weight vehicles. Equipped with hydraulic adjustments allowing the movement of all articulations, including tipping back horizontal position for road transfer. Thanks to manageability and practical use characteristics only one operator is necessary for its use.

NITROGEN ACCUMULATOR

On request, it is inserted in the hydraulic lifting circuit, allows a considerable absorption of the arm weight, thus the head can free-floating and follow the ground inequalities.

HIGH-QUALITY STEEL TUBULAR

Allows the most hardness, keeps down the equipment weight.

UNIVERSAL CUTTING HEAD

For cutting grass and shrubs, allows the mounting of variuos blade types and can be easily interchanged with other heads.

HYDRAULIC PUMP

Operated directly by the power take-off of the vehicle, it assures the mowing roller actuation.

ROLLER STARTING VALVE

Allows the stop and start of the blade carrying roller by the control box in the cab.

OIL TANK

Has a big capacity, designed with filters and levels for control. It has also the function of ballast.

SHOCK ABSORBER

Absorbs shocks both in advance and in reverse.

COUPLING PLATE

Consents to interchange the various accessories.

SAFETY LOCKING DEVICES

In compliance with safety norms (CE mark).

SUPPORTING FEET

With mechanic height adjustment on the ground.

RAPID ATTACHMENT PLATE TO VEHICLE

Available not only in the ASSALONI version (patented) but also in the DIN 76060 or SETRA version.