

**Proven  
Performance**

# ***McCloskey*** INTERNATIONAL **C50**





## C50 High Performance Crusher

McCloskey International have a proven reputation for designing quality, class leading machinery. McCloskey International is now breaking new ground with the introduction of the C50 crusher. With class leading capacity, 50 inch wide jaw, and large stockpile heights as standard, the new C50 crusher continues to push the boundaries of industry performance.


"We are extremely pleased with the production capacity of the C50. The C50 is very efficient and the end product is excellent."

Ian McDougall  
CES Quarry



### Options

Roll in bogie.



Hopper extension.



Overband Magnet.



Crusher deflector plate.



Water pump and dust suppression.



## Features and Benefits

### Conveyor -

Extended 42" main conveyor as standard, giving large stockpile capacity. Conveyor lowers and is easily removable for maintenance.

### Power unit -

CAT C9 engine (261kW) with excellent all round access for maintenance. Innovative hydraulic system.

### Crusher -




True 50"x26" (1270mm x660mm) jaw. Forward and reverse hydrostatic drive. Reversible jaw drives. Hydraulic closed side setting.

### Colour Control Panel -

User friendly waterproof control panel.

### Feeder -

Folding hardox hopper mounted over vibrating feeder with integral grizzly section. Auto regulated feeder speed.




## Peak to Peak Closed Side Setting

APPROXIMATE CAPACITIES AT PEAK TO PEAK CLOSED SIDE SETTINGS																
Feed Size (mm)	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"	6 1/2"	7"	Feed Size (mm)
100	18	25.4	34.3	38.1	50.8	63.5	76.2	89.1	102	115	128	141	154	167	180	100
200																200
300																300
400																400
500																500
600																600
750																750
1000																1000
1500																1500
2000																2000
2500																2500
3000																3000
3500																3500
4000																4000
4500																4500
5000																5000
5500																5500
6000																6000
6500																6500
7000																7000
7500																7500
8000																8000
8500																8500
9000																9000
9500																9500
10000																10000

\*Based on material weighing 2700 lb per cubic yard.  
Capacity may vary as much as + or - 25%

\*Closed side setting from 2.5 inches to 5 inches

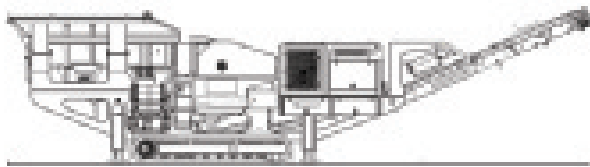

## C50 Dimensions and Weight

Length - Working	16.33m (53' - 7")
Height - Working	3.96m (13' - 9")
Length - Transport all models	14.3m (47' - 10")
Width - Transport all models	2.9m (9' - 6")
Height - Transport track	3.4m (11' - 2")
Weight - Track	48,000kg (105,821 lbs) - estimated

# McCloskey

INTERNATIONAL


**North & South America**  
#1 McCloskey Road, RR#7  
Peterborough, Ontario Canada,  
K9J 6X8  
1-877-Trommel  
T (705) 295-4925  
F (705) 295-6159  
sales@mccloskeyinternational.com

**UK & International**  
47 Moor Road,  
Coalisland,  
Co Tyrone,  
N.Ireland BT71 4QB  
T +44 (0) 2887-740-926  
F +44 (0) 2887-747-242  
salesuk@mccloskeyinternational.com

McCloskey International reserves the right to make changes to the information and design of the machines on this brochure without reservation and notification to the users. McCloskey International assumes no liability resulting from errors or omissions in this document.



## Standard Features

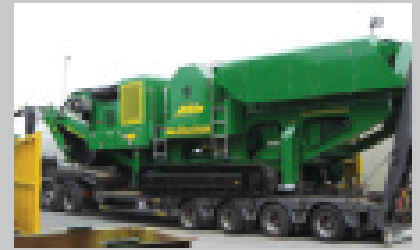

### Durability

Branded components throughout - CAT Engine, David Brown Pumps, 2 Pack Paint system.  
Heavy duty hardox steel.  
Innovative design.  
High efficiency diesel hydraulic system allows higher throughput and lower fuel consumption.



### Maintenance / User friendly

Accessible engine bays.  
Fixed galvanised walkways.  
Universal user friendly controls throughout the McCloskey line.  
10min setup time.  
Highly maneuverable onsite.  
Unique user friendly belt adjusters.

### Engine shutdown as standard for following:

Low oil pressure.  
High water temperature.  
Air filter blockage (selectable).  
Fuel contamination.  
Low hydraulic tank level.  
High hydraulic return line filter backpressure.  
High hydraulic water filter backpressure.  
High hydraulic oil temperature.



Authorised Dealer