



For Earth, For Life  
**Kubota**

# DMC

**KUBOTA FORAGE EQUIPMENT**

## **DISC MOWER CONDITIONERS**

Front mounted and trailed mower conditioners ranging from 9'2" (2.8m)  
to 33'5" (10.2m)





# DESIGNED TO OFFER Y



## ***PROTECTING YOUR BUSINESS – FROM THE GROUND UP***

An investment in a Kubota machine will continue to pay off for years to come. We are committed to designing machines that offer maximum productivity and profitability through-out the entire life of that investment.

## ***INNOVATIVE SOLUTIONS***

Our focus on developing innovative high quality products is rooted from our research and insight into our customer expectations, allowing us to offer machines suitable for any mowing operation.



# OU A LITTLE BIT MORE



*DMC6300 series – rear mounted mower conditioners with unique suspension concept, steel tine conditioning and working widths of 10'6"-33'5" (3.2-10.2m).*



*DMC7000T/R series – front mounted mower conditioners with steel tine or roller conditioning and 9'2"-11'6" (2.8-3.5m) working width.*




*DMC8000T/R series – left hand trailed mower conditioners with steel tine or roller conditioning and 9'2"-11'6" (2.8-3.5m) working width.*



*DMC8500T series – centre pivot trailed mower conditioner with steel tine or roller conditioning and 10'6"-11'6" (3.2-3.5m) working width.*



# CUTTING PERFORMANCE

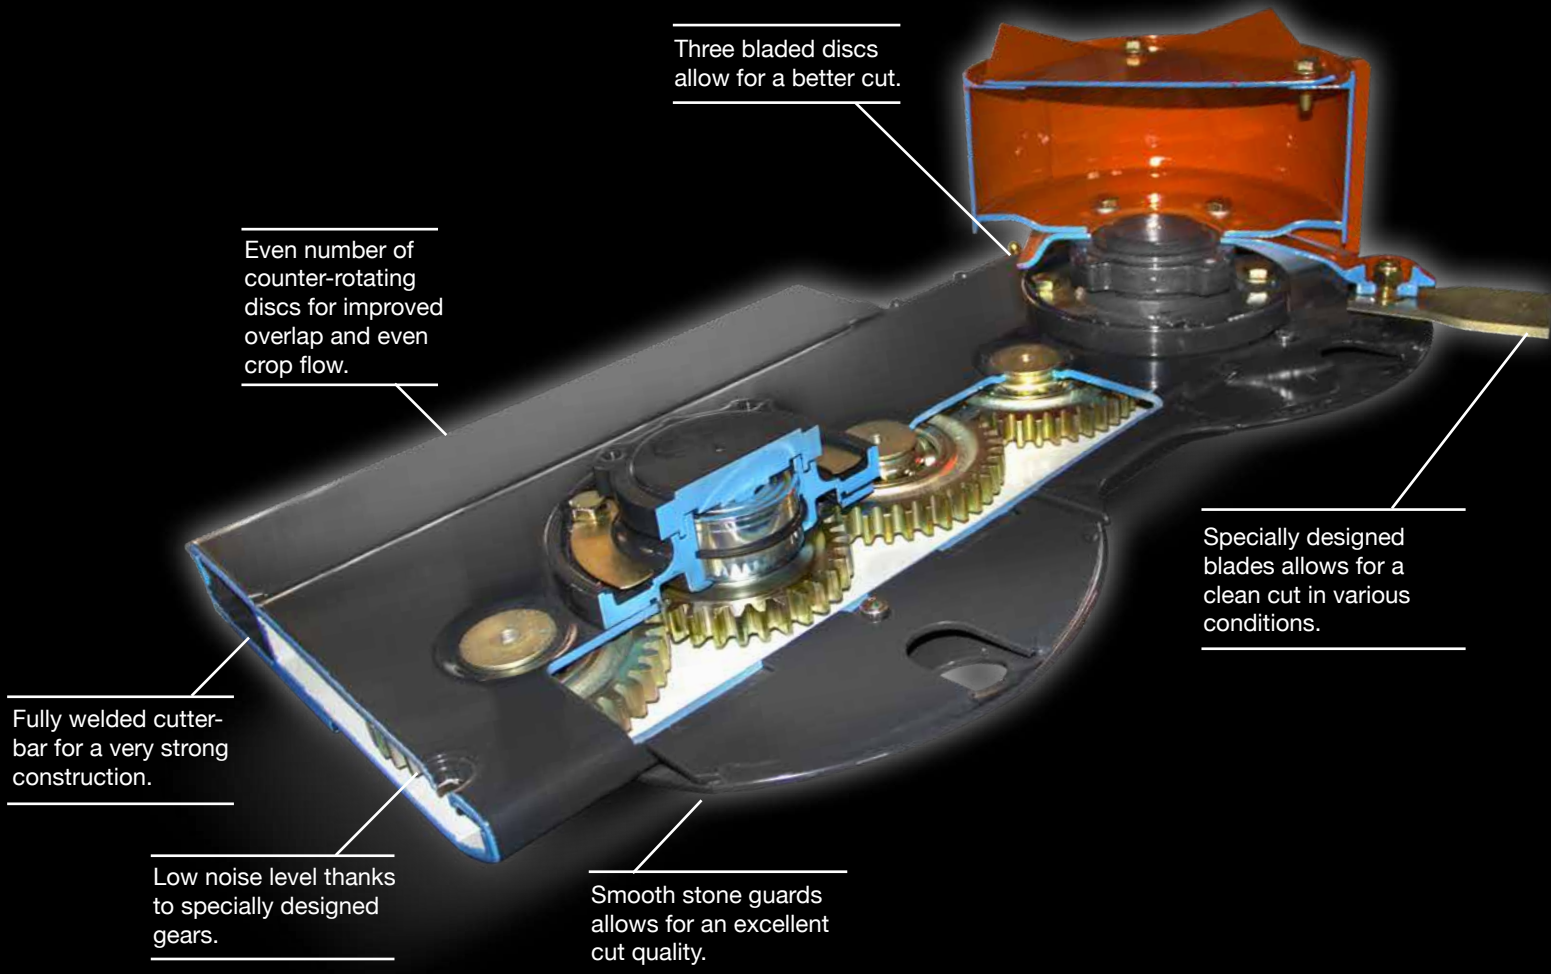

*Easy access to the cutterbar.*

## **'Express' Quick Change of Knives**

All disc mowers in the Kubota range can be fitted with the 'Express' system for quick and easy changing of blades. Simply place the lever around the bolt, release the spring by turning the lever, and the blade is ready to be replaced with a new one.



# E IN NEW DIMENSIONS

## COUNTER-ROTATING THREE BLADED DISCS

### Low Noise Cutterbar

The Kubota cutterbar is designed for low maintenance and quiet operation. Operators will appreciate the low noise of the cutterbar during long busy days.


### Heavy Duty Cutterbar

The fully welded cutterbar with overlapping C-channels makes for a very rigid and strong design, ensuring very high level of durability.


### Three Bladed Discs for More Cuts

With three blades per disc, Kubota mowers are constantly cutting. This design allows for a third less load per blade; an even load on the drive; smoother power usage; and produces a neat, clean cut.

Each steel blade is precisely angled to immediately discharge the cut crop upwards by both air flow and mechanical action.

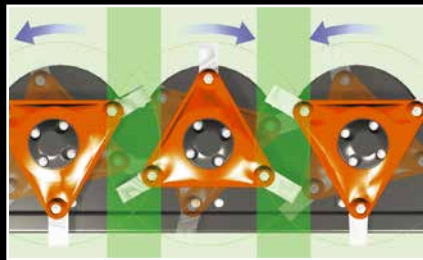


*Kubota's counter-rotating three bladed discs provide a wider overlap on each disc...*

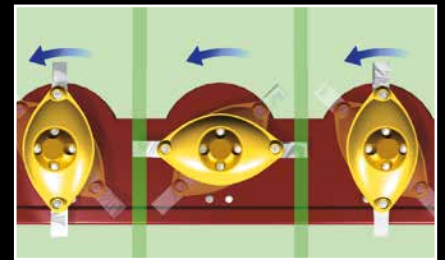

*... compared to solutions with uneven number of discs.*

### Counter-Rotating Cutting Discs for Improved Overlap

All Kubota mowers have an even number of counter-rotating discs. Apart from the immediate crop transport to the rear, this system ensures that even in wet conditions, no stripes of uncut forage are left in the field.

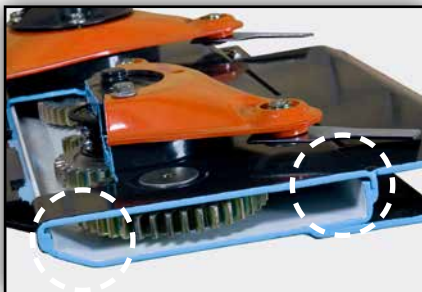

*Fully welded cutterbar with overlapping C-channels ensures a very strong and rigid cutterbar design.*



*Specially designed gears with a rounded design and wide tooth pattern result in low noise and efficient transfer of power.*



**KUBOTA  
CUTTERBAR  
TECHNOLOGY**

# EFFECTIVE SEMISW

## What Makes SemiSwing Stand Out

Utilizing centrifugal force is what makes the Kubota SemiSwing conditioner stand out to other conditioning systems. It offers an exceptional conditioning effect while still offering excellent tine protection and virtually no wear and tear.

SemiSwing tines, due to their restricted movement pattern, are designed to encapsulate part of the centrifugal force, and utilize it to keep the tine in position during rotation. This ensures there is no movement during rotation and full conditioning effect.

To adapt to ever changing crop conditions, the conditioner plate can be set in 3 positions.

Efficient crop transfer - crop is efficiently lifted away from the cutterbar and moved along the conditioner plate, ensuring effective conditioning.

The tine's swing design allows large obstacles to pass through without interfering with the rest of the conditioning process.

The full width conditioner allows for efficient crop conditioning and reduced fuel consumption.

## Exceptional Conditioning – Minimal Blockages

Kubota's SemiSwing tine conditioner is an aggressive full width conditioning system. When the rotor starts rotating, the SemiSwing tines will instantly move into their working position and stay in a fixed position.

The angle and position of the SemiSwing tines ensure the best possible crop throughput. The crop is moved away from the conditioner rotor and towards the conditioner plate. This results in a reduced number of blockages and full utilization of the conditioner plate.

## Excellent Tine Protection – No Maintenance

When encountering an obstacle, the SemiSwing steel tines are able to pivot backwards and let obstacles pass through. This allows large obstacles (up to 4inch (103mm)) to pass without breaking the tines. This simple system minimizes down time and reduces the risk of broken tines in the crop.

# ING CONDITIONING

The steel tines will stay in a fixed position, allowing for an aggressive conditioning effect.

Reduced wear and tear – no constant movement of conditioner tines – virtually no wear on brackets or tines.

Once in working position, the tine is locked by the rotors forward movement. This allows each tine to stay in its full working position.

## ADJUSTABLE CONDITIONING EFFECT

### Match Crop Conditions

The conditioner plate can be set in 3 positions according to the required conditioning effect. Depending on crop conditions and the amount of crop you are cutting, the plate is easily adjusted to match that field's conditions. The narrower the clearance, the more intensive conditioning you get.

It is possible to adjust the speed of the conditioning rotor to match the crop or conditions, this helps save fuel and preserve the crop. The DMC mower conditioners offer several options for rotor speed from 500 to 1000 RPM, which are easily adjusted by simply switching pulleys.




*Easy adjustment of conditioning intensity.*




*Adjustable rotor speed enables fuel saving and preservation of crop.*

48.5lbs (22kg) of weight are required to pivot the SemiSwing tine backwards.

This means the tine will stay in a fixed position while conditioning crop. This design minimizes the tines movement during rotation, allowing for virtually no wear and tear on the brackets while still providing a full conditioning effect.

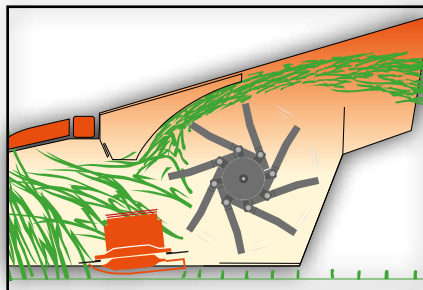


*During operation tines will stay in a fixed position, providing full conditioning with minimum wear.*

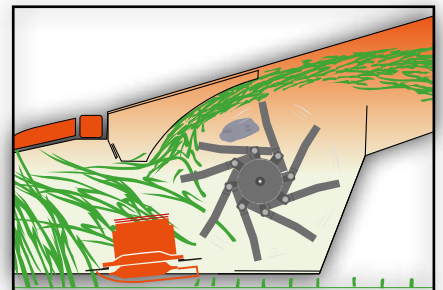

*It requires a weight of 48.5lbs (22kg) on the tine to pivot the SemiSwing tine backwards.*



# GENTLE ROLLER

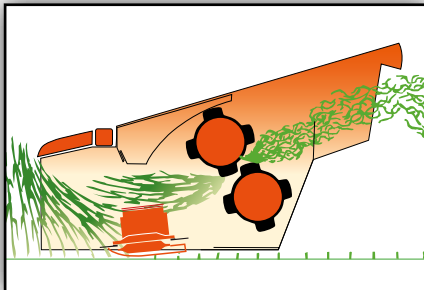

*The special roller configuration, with the top roller located further forward than the bottom roller, provides outstanding upwards flow of crop.*



*Both conditioner rollers are driven by a permanently lubricated, low maintenance, closed transmission.*



*Chevron-pattern rollers, ensure uniform conditioning across the complete working width.*



# CONDITIONING

## ***ROLLER CONDITIONING – DELICATE HANDLING OF FRAGILE CROP***

### **Preservation of Nutritional Value**

Roller conditioning provides gentle, yet effective handling of fragile crop such as alfalfa or clover. Roller conditioning effectively cracks stems and their wax coating, while still preserving the nutritious leaves. This in turn facilitates an even drying pattern and utilization of the forage.

### **Chevron Rubber Rollers**

The 8.8inch (224mm) diameter rubber rollers, made from highly durable polyurethane, are vulcanized onto a steel core. This process guarantees straight rollers that will not twist out of shape, regardless of the force transmitted onto them. The chevron pattern actively directs the crop away from the cutting discs, which enables the best possible cutting quality, while limiting the power requirements needed.

### **Full-Width Conditioning**

The Kubota machines feature two full-width chevron, counter rotating conditioning rollers, with the top roller located further forward than the bottom roller. This unique design ensures optimized flow of material from the cutting discs toward the rear, making complicated systems with extra guiding rollers, as seen in other systems, obsolete.

Additionally, the full-width design allows for the distribution of crop into a thinner mat, increasing the amount of crop in contact with the rollers.

### **Non-Stop Mowing**

If an obstacle is encountered, the roller pressure will be momentarily relieved, which separates the rollers and allows obstacles up to 2.4 inches (62mm) to pass without damage to the rollers and without having to stop mowing.

### **Easily Adjusted, Uniform Conditioning Intensity**

The spring-controlled pressure exerted between the two rollers guarantees uniform conditioning intensity, regardless of the amount of crop passing through the rollers. The required conditioning intensity varies from field to field, which is why it is easily and endlessly adjustable via a handle.

The 8.8inch (224mm) diameter rubber rollers will not twist out of shape, regardless of the force transmitted onto them. If an obstacle is encountered, the spring tensioning system will separate the rollers, leaving an opening of up to 2.4inch (62mm), allowing objects to pass without damage to the rollers.



# DMC6300 SERIES –

## **KUBOTA DMC6332T/R-DMC6336T VARIO-DMC63100T VARIO**

### **How You Will Benefit from QuattroLink**

Inspired by the racing world, Kubota has created a new series of mower conditioners with a ground breaking suspension concept – the QuattroLink. The new DMC6300 series has been designed for even more productivity and to handle tougher conditions than ever. With it's accurate tracking ability and very flexible working range this suspension provides unrivalled cutting performance.

Like a race car you want better tracking, ability to go at faster speed and adjust instantly to changing field conditions when operating your mower conditioner. These are the main benefits you will experience when running the DMC6300 series. The four suspension arms provide the mowing unit with an exceptional flexibility in adapting instantly to demanding field conditions allowing higher speed and more productivity.



### **New Innovative Suspension Concept for Accurate Tracking**

What makes the QuattroLink suspension unique? The mowing unit is pulled by four suspension arms fitted onto a fixed carrying arm that allows the mowing unit to float independently over the field, adjusting instantly and accurately to any changes in ground conditions.

### **No Compromises on Flexibility**

The mowing pattern is extremely flexible with a vertical working range of 27.6" (700mm) up and down and a transverse working range of 30°. The four arm suspension concept ensures constant ground pressure while mowing.

### **Full Width BreakAway Protection**

Our NonStop BreakAway system just got even better. With the new QuattroLink suspension protection is provided across the whole working width of the mower. There are no limiting factors on the inside part of the mower, giving the driver true peace of mind. When hitting an obstacle in the field, the mowing unit will instantly move backwards and up, and then return to the original position.



# RACING MOWERS



Exceptional ground following system. The four suspension arms provide an adaptation range of 15.7" (400mm) upwards and 11.8" (300mm) downwards for accurate tracking.



Excellent adjustment to uneven field conditions with a transverse working range of 30°.



Ground pressure is easily set from the tractor seat, hydraulically with an easy to read pressure gauge on the mower for clear guidance.



BreakAway Protection – When encountering an obstacle in the field the mowing unit will swing backwards and over the obstacle, even on the inside of the mower, and then return it to the original working position. No need to stop – no time lost.

# MOWING M

## ***KUBOTA DMC6332T/R-DMC6336T VARIO-DMC63100T VARIO***



### **Efficient Headland Management**

The DMC6300 series provides generous clearance across the complete cutterbar, including the inside area. When lifting the mower on headlands, the mowing unit is raised and the carrying arm is tilted to a 10° angle. This provides the DMC6300 series with a level ground clearance of minimum 19.7" (500mm) across the full working width.

When lowering the mowing unit the carrying arm is lowered evenly without one side touching the ground before the rest of the mower, avoiding unnecessary stress and wear on the mower.



Minimum 19.7" (500mm) ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.





# ADE EASY



## Swath Plates Automatically Expand

Swath plates automatically expand when being slid inwards to support efficient and accurate swathing.

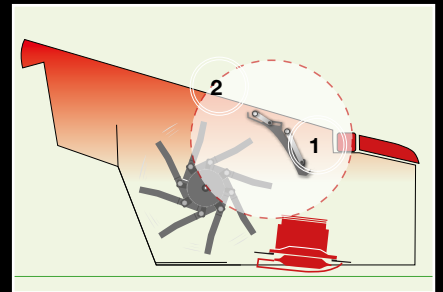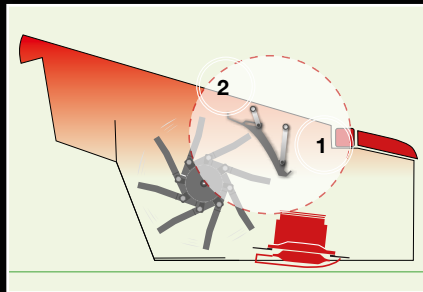

## Dual Adjustment of Conditioner

The conditioner plate can be adjusted at both front (1) and rear (2) ends to customize the conditioner to crop intensity.



*Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side. No tools are required.*



*Front and rear end of the conditioner plate is adjusted independently.*

## Even More Efficient Conditioning

The front end is adjusted separately to suit the crop intensity, even for massive crop, to avoid any blockages. Rear end is adjusted to ensure smooth and efficient crop flow into swaths or widespreading.



# SMART EN

## ***KUBOTA DMC6332T-DMC6332R- DMC6336T VARIO-DMC63100T VARIO***



### **Responding to Ever Changing Conditions**

DMC6300 series comes with a host of smart features that allow you to get the job done faster, smoother and more efficient. When there's work to be done, you need a mower conditioner that is easily customized to the exact conditions facing you today.

Setting the conditioning intensity to crop density and conditions, changing

between swathing and widespreading and checking discs and knives is done easily and quickly, taking the hassle out of the daily work.

### **Ground Pressure Remains Constant**

During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours.

The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same. No need to stop and adjust, reset and control the ground pressure before you can go on. Just set the mower to the requested overlap and mow on.



# GINEERING



## **Parking, Safe and Sure-Footed**

With the integrated parking device, storage of the DMC6300 series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking foot, bringing total height below 13'1" (4.0m). When parked, being in working position or during vertical storage the lift arms are always in a horizontal position, making it very easy to mount or unmount the mower from the tractor.



*FlexProtect side covers, rugged and sturdy, yet flexible when bumping into obstacles.*



*Easy and quick access to the cutterbar for daily inspection of discs and blades.*



*Simple mounting and adjusting – easy levelling of suspension arm to counter any sideways tilt of tractor.*

# UNIQUE S

## ***KUBOTA DMC6336T VARIO- DMC63100T VARIO***



### **Hydraulic Adjustment of Overlap**

DMC6336T Vario and DMC63100T are fitted with hydraulic SideShift integrated into the carrying arm allowing each mowing unit to move 15.7" (400mm). To easily compensate for changing field conditions, the adjustable overlap is performed via the telescopic arm that is part of the mower's suspension.

Adjusting the overlap is quickly done hydraulically from the tractor cab, and the chosen overlap is easily observed by the scale on the suspension arm.

Increase overlap when mowing odd sized fields, going around corners or operating on slopes to ensure no stripes are left behind. Reduced overlap on flat and even fields to improve performance and cutting width as much as 10%.



# OLUTIONS

## TRANSPORT



### ComfortControl

The optional ComfortControl joystick provides the extra comfort of electro hydraulic folding for transport. Easy and simple.



### Below 12'2" (3.7m) Transport Height

The mower folds hydraulically for transport and the telescoping frame arm moves to lowest overlap position, to reach a transport height of only 12'2" (3.7m). And there is no need to leave the tractor before heading off, the outer side protection guard hydraulically folds into transport position.

### Even Weight Balance for High Speed Transport

The complete weight of the DMC6300 series is spread evenly on both rear tires, with a 50/50% weight balance. This means the tractor is not sliding to one side during transport, providing extremely stable running characteristics of tractor and mower during the transport, allowing for higher speed.

# THIS IS EF

## **KUBOTA DMC63100T VARIO**

### **Mow More – Make More**

With its' 33'6" (10.2m ) working width the new DMC63100 Vario is geared for productive working days. Come demanding terrains, come long challenging work days – the new DMC63100 Vario has been designed to handle tougher conditions. Packed with new innovative features such as the QuattroLink suspension, Vario adjustment of overlap and full width BreakAway protection DMC63100 Vario is custom-made to boost efficiency.

### **Compact During Transport**

The mower folds hydraulically for transport and the telescopic frame arm moves to lowest overlap position, to reach a transport height of only 13' (3.9m) and a width below 9'10" (3.0m). And there is no need to leave the tractor before heading off, the outer FlexProtect protection guard hydraulically folds into transport position (option).



### **Load Sensing Hydraulics for Reduced Power Consumption**

The hydraulic circuits of DMC63100 Vario feature a load sensing system that efficiently utilises the oil flow resulting in reduced power requirements. This means power requirement of DMC63100 Vario starts at only 200hp significantly improving fuel economy.

### **Efficient Headland Management**

DMC63100 Vario provides generous clearance across the complete cutterbar, including the inside area. When lifting the mower on headlands, the mowing unit is raised and the carrying arm is tilted to a 10° angle. This provides the DMC63100 Vario series with a level ground clearance of minimum 1'8" (500mm) across the full working width.

When lowering the mowing unit the carrying arm is lowered evenly without one side touching the ground before the rest of the mower, avoiding unnecessary stress and wear on the mower. In low crop conditions the lifting height of mowing units can be reduced for even faster headland operations.



# EFFICIENCY



Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



The carrying arm is tilted back to bring the mowing unit into an even position before lowering the mowing unit.



Mowing unit is lowered evenly onto the ground without one side touching the ground before the rest of the mower.



## Parking, Safe and Sure-Footed

With the integrated parking device, storage of the DMC63100 Vario series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total height below 13'1" (4.00m).



# THE COMBINAT



## ***KUBOTA DMC7032T-DMC7032R-DMC7036T***

### **Ideal for a Combination**

Kubota DMC7000T/R series machines, with a choice of either SemiSwing steel tine or roller conditioning, can be used in combination with a variety of mower conditioners, including the DMC6300, DMC8000 or DMC8500 series, or on its' own, making these extremely versatile machines. With a working width of 10'6" (3.2m) or 11'6" (3.5m), the capacity of these machines is substantial.

### **NonStop BreakAway**

To ensure maximum protection of the cutterbar, the Kubota NonStop BreakAway solution is implemented. During normal operation, the cutterbar is angled downwards, but if an obstacle is encountered, the cutterbar angle changes to a horizontal position, preventing the machine from being damaged.



*The suspension design protects the cutterbar against foreign obstacles.*



# ION MOWER

## Machines For Professionals

Kubota DMC7000T/R series is characterized by an excellent design of the suspension and accurate ground following. In addition the Kubota cutterbar, with outstanding cutting performance and a choice of either SemiSwing steel tine or chevron roller conditioning system make this mower hard to beat.

The SemiSwing concept is based on high quality steel tines with low wear and high resistance has proven to have significantly reduced maintenance costs. Furthermore these machines are fitted with a variable conditioner rotor speed, to adapt to varying crop conditions - All features making this machine a very professional solution.




*Kubota DMC7032T with 10'6" (3.2m) working width and a weight of only 2712lbs (1230kg).*

# EXCEPTIONAL ADA

## **KUBOTA DMC7032T-DMC7032R-DMC7036T**

### **KUBOTA. Ground Following System**

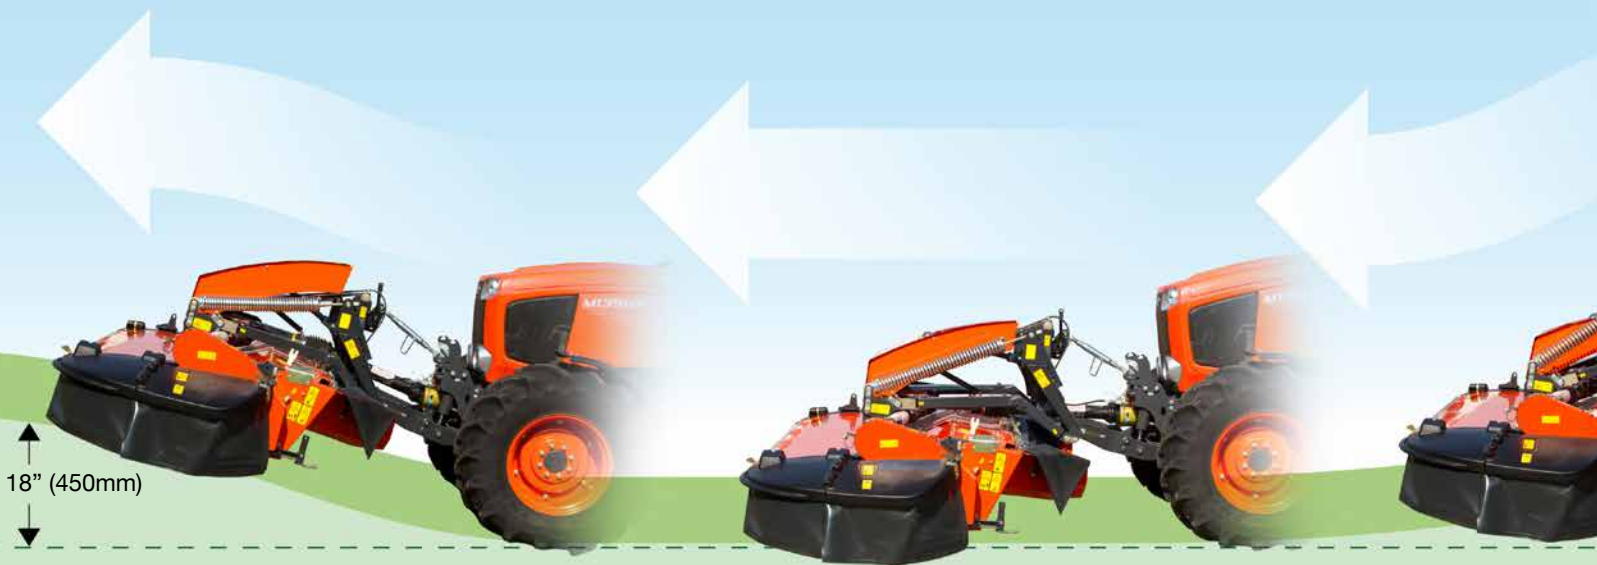

*Mower reacts instantly to uneven ground contours and can move 10" (250mm) down and 18" (450mm) up.*

### **Superior Suspension Protecting Ground and Machine**

The suspension has been designed to offer outstanding flotation and even ground pressure. The two large suspension springs have been moved further outwards to provide excellent side stability, which is reflected in optimum protection of the stubble and far less skid wear.

The suspension of the machine is extremely flexible, allowing downwards movements of 10" (250mm) and upwards of 18" (450mm).

In addition an innovative suspension design allows a transverse adaptation of 24°. This ensures excellent adaptation to uneven ground and higher working speed.



*Heavy duty suspension springs for excellent ground adaptation.*



# PTATION ABILITY



*Vertical adaptation of 24° to adjust to uneven fields.*



*Compact design for excellent view during operation.*

## Easy Operation

Substantial efforts have been made to make daily operation as easy as possible. The clever design of the suspension creates an undisturbed view of the entire mowing area and excellent overview during transport. A clearance of 14" (350mm) is achieved during transport and headland turns.





# TRAILED MOWER

## KUBOTA DMC8000/DMC8500



*A lifting height of 20" (50cm), ensures excellent ground clearance for transport and during headland turning.*



*Operated on either side of the tractor, ...*



*...DMC8500 models offer time saving potential.*

### **Tailored To Any Request**

Equipped with features such as a fully welded cutterbar, SemiSwing Tine or chevron roller conditioners, independent active suspension and FlipOver wide spreading, Kubota's DMC8000 and DMC8500 series machines are ready to meet every task with exceptional performance.

### **Tough and Reliable In Every Situation**

Being prepared when mowing needs to take place is essential. Our machines are designed to offer maximum productivity, and our dealer network is dedicated to helping you do more, so you can make the most of your time.



*The swivel hitch headstock with reversible gearbox provides optimal maneuverability.*



# CONDITIONERS



## ***CENTER PIVOT DRAWBAR***

The DMC8500 models are equipped with a center pivot drawbar for mowing both to the right and left side of the tractor. This important advantage in mower design allows operators to mow in one continuous pattern, without the need for constantly opening up new headlands. Consequently, time consuming short runs are eliminated and mowing capacity is increased.

With this unique feature, you can prevent the creation of triangular or oddly shaped fields.

Turning on headlands is much easier, because the hydraulically operated drawbar allows the turning circle to be significantly reduced, saving time and reducing the number of instances where cut crop is driven over.



*Transport with integrated lighting kit.*



*Drawbar mount for easy attachment.*



*Integrated tool box.*



# ACCURATELY FOLLOW

## *KUBOTA DMC8000/DMC8500*



### **Kubota Suspension for Clean Cutting Action**

The DMC8000 and DMC8500 series are engineered with the unique Kubota suspension concept. The complete mowing section including the conditioner is suspended independently from the main chassis by either two or four long adjustable suspension springs, allowing the field surface to be followed closely.

If an obstacle is encountered in the field, the mowing section will lift up and backwards, protecting the cutterbar from damage. When the obstacle is passed, the mowing section automatically returns to the working position.

A simple crank adjusts the whole cutterbar assembly up or down to a desired stubble height. Additionally there are several skid options to control cutting height.



*Easy adjustment of stubble height.*



# S GROUND CONTOURS

## Accurate Side to Side Adaptation

The long spring design allows for excellent ground following ability. In uneven fields, the mower is able to adapt +20"/-5.9" (+500mm/-150mm).

## Even Ground Pressure

The suspension springs are fitted on the widest possible position of the mowing section to ensure even ground pressure. Weight on ground is stable and only approx. 88-110lbs (40-50kg) on each side.

## Effective Protection Against Foreign Obstacles

The suspension rod is fitted between mowing section and mainframe. This ensures that distance between suspension rod and pushing arm is constant. When an obstacle in the field is encountered, the mowing section will move backwards and automatically raise to allow the object to pass. The mower will automatically return to working position once the obstacle is navigated.



*The suspension springs ensure excellent side to side adaptation of the complete mowing section.*



*Kubota's DMC8536 and DMC8540 are fitted with 4 suspension springs for accurate ground pressure.*



*When an obstacle is encountered, the mowing section is forced backwards and the special suspension rod ensures that the mowing section is automatically lifted upwards and above the object.*



*The suspension springs allows the mower to closely follow ground contours in uneven conditions. The cutting section can adapt 20" (500mm) upwards and 5.9" (150mm) downwards.*



# PREPARED-WHATE

## ***KUBOTA DMC8000/DMC8500***



### **Merger Belt For Improved Performance**

The Kubota DMC8000 and 8500 series can be fitted with a versatile merger belt to place two swaths into one. This allows larger swaths to be created, to speed up harvesting. The merger belt can be raised and lowered from the tractor seat during operation. This allows you to adapt to each individual situation and requirement, without wasting valuable time.

### **Adjustable Belt Speed**

The belt speed is infinitely adjustable from the cab. In this way, the swaths can be placed either side by side, or on the top of each other, ensuring a perfect match to the pick up width of the following machine.



*When placing the first swath, the belt is raised and hydraulically lowered for the second swath.*



# VER THE WEATHER



*Changing from swathing to wide spreading is a one-man-job.*



*Simply rotate the rear plate 180°.*



*Dismount the two deflector doors and you are ready to mow.*

## **Easy-To-Use Wide Spreading Kit**

The Kubota DMC8000 and DMC8500 series can be fitted with an easy-to-use wide spreading kit. This enables crop to be cut and spread in one operation, saving both time and resources.

## **The Spreading Plate**

The spreading vanes are placed further back on the mowing unit than when compared to conventional systems. The extended distance between the conditioning rotor and the spreading vanes allows for a consistent spread of material across the entire working width, which in turn ensures a better dry down.



*The crop is directed inwards, away from the uncut crop.*

# SPECIFI

Kubota Models	DMC6332T	DMC6332R	DMC6336T VARIO	DMC63100T VARIO	DMC7032T
Drawbar	-	-	-	-	-
Conditioner	SemiSwing	Roller cond.	SemiSwing	SemiSwing	SemiSwing
<b>Dimensions &amp; Weight</b>					
Cutting Width ft (m)	10'5" (3.18)	10'5" (3.18)	11'6" (3.50)	32'2"/33'5" (9.8/10.2)	10'6" (3.2)
Weight approx. lbs (kg)	3086 (1400)	3417 (1550)	3296 (1495)	6172 (2800)	2712 (1230)
Transport width ft (m)	9'10" (3.0)	9'10" (3.0)	9'10" (3.0)	9'6" (2.9)	9'10" (3.0)
<b>Attachment to Tractor</b>					
Hitch (CAT)	Cat 2/3	Cat 2/3	Cat 2/3	Cat 2/3	Cat 2
PTO (RPM)	1000	1000	1000	1000	540 • / 1000 o
Min. PTO horsepower req. (hp)	90	120	120	200	80
<b>Operation</b>					
Number of discs and blades	8 / 24	10 / 30	10 / 30	2x10/2x30	8 / 24
Remotes	2	2	3	LS	1
Cutterbar operating range °	-	-	-	-	-
Stubble height inch (mm)	1.18"-2.36" (30-60)			1.18"-2.36" (30-60)	0.79"-1.97" (20-50)
Cond. rotor speed	1000/700	900	1000/700	1000/700	600/900
Tires	-	-	-	-	-
<b>Accessories</b>					
Wide spreading kit	o	o	•	•	-
High skids inch (mm) +0.8/+1.6/+3.2 (+20/+40/+80)	o / o / o	o / o / o	o / o / o	o / o / o	• / o / o
Throwing wings for diff. crops	o	o	o	o	o
Lighting kit	o	o	o	o	o
Reduced cond. speed kit (600/900rpm)	-	-	-	-	•

Kubota Models	DMC8032R	DMC8036T	DMC8036R	DMC8536T	DMC8536R
Drawbar	Left hand	Left hand	Left hand	Center	Center
Conditioner	Roller cond.	SemiSwing	Roller cond.	SemiSwing	Roller cond.
<b>Dimensions &amp; Weight</b>					
Cutting Width ft (m)	10'6" (3.2)	11'10" (3.6)	11'10" (3.6)	11'10" (3.6)	11'10" (3.6)
Weight approx. lbs (kg)	4544 (2061)	4773 (2165)	5478 (2485)	5346 (2425)	5348 (2426)
Transport width ft (m)	9'10" (3.0)	11'2" (3.4)	11'2" (3.4)	11'2" (3.4)	11'2" (3.4)
<b>Attachment to Tractor</b>					
Hitch (CAT)	Cat 2 or pin hitch				
PTO (RPM)	540 • / 1000 o	540 • / 1000 o	540 • / 1000 o	540 o / 1000 •	540 o / 1000 •
Min. PTO horsepower req. (hp)	80	90	90	90	90
<b>Operation</b>					
Number of discs and blades	8 / 24	10 / 30	10 / 30	10 / 30	10 / 30
Remotes	2	2	2	2	2
Cutterbar operating range °	-15 / +15	-15 / +15	-15 / +15	-15 / +15	-15 / +15
Stubble height inch (mm)	0.79"-1.97" (20-50)				
Cond. rotor speed	900/1200	450 o / 600/900	900/1200	450 o / 600/900	900/1200
Tires	380/55-17	380/55-17	380/55-17	380/55-17	380/55-17
<b>Accessories</b>					
Wide spreading kit	o	o	-	o	o
High skids inch (mm) +0.8/+1.6/+3.2 (+20/+40/+80)	• / o / o	• / o / o	• / o / o	• / o / o	• / o / o
Throwing wings for diff. crops	•	o	•	o	•
Lighting kit	•	•	•	•	•
Reduced cond. speed kit (600/900rpm)	-	•	-	•	-

• = standard o = optional - = not available



# CATIONS

DMC7032R	DMC7036T	DMC8028T	DMC8028R	DMC8032T		
-	-	Left hand	Left hand	Left hand		
Roller cond.	SemiSwing	SemiSwing	Roller cond.	SemiSwing		
10'6" (3.2)	11'6" (3.5)	9'2" (2.8)	9'2" (2.8)	10'6" (3.2)		
2793 (1267)	2844 (1290)	4012 (1820)	4233 (1920)	4354 (1975)		
9'10" (3.0)	11'2" (3.4)	8'10" (2.7)	8'10" (2.7)	9'10" (3.0)		
Cat 2	Cat 2	Cat 2 or pin hitch				
540 • / 1000 o	540 • / 1000 o	540 • / 1000 o	540 • / 1000 o	540 • / 1000 o		
80	80	70	70	80		
8 / 24	10 / 30	8 / 24	8 / 24	8 / 24		
1	1	2	2	2		
-	-	-17 / +17	-17 / +17	-17 / +17		
0.79"-1.97" (20-50)						
600/900	600/900	450 o / 600/900	900	450 o / 600/900		
-	-	380/55-17	380/55-17	380/55-17		
-	-	o	o	o		
• / o / o	• / o / o	• / o / o	• / o / o	• / o / o		
o	o	o	o	o		
o	o	•	•	•		
•	•	•	•	•		

DMC8540T	DMC8540R					
Center	Center					
SemiSwing	Roller cond.					
13'1" (4.0)	13'1" (4.0)					
5512 (2500)	5976 (2710)					
12'6" (3.8)	12'6" (3.8)					
Cat 2 or pin hitch						
540 o / 1000 •	540 o / 1000 •					
100	100					
10 / 30	10 / 30					
2	2					
-15 / +15	-15 / +15					
0.79"-1.97" (20-50)						
900/1200	900/1200					
380/55-17	380/55-17					
o	o					
o / • / o	o / • / o					
o	•					
•	•					
•	-					

*The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.*

©2019 Kubota Canada Ltd.



## **KUBOTA CANADA LTD.**

Kubota Canada Ltd.

Head Office: 5900 14th Avenue, Markham, Ontario L3S 4K4 Tel (905) 294-7477

**Visit our web site at: [www.kubota.ca](http://www.kubota.ca)**



