



Powered Access Line



NEW

Easy Up 5 Picking




Standard Equipment

- 2WD traction, DC electric motors and electromagnetic brakes
- Swivel caster interlock for straight line driving
- Selector for 3 different proportional speed
- Non marking tires
- Double material tray, non-slip, adjustable and fixed
- Double door access gate with spring-lock
- Control box on platform IP65, with proportional joystick and emergency stop
- Ground control panel with key switch
- Inclinator with audible/visual alarm and motion cut out
- Load sensor with audible/visual alarm and motion cut out
- Electrical scissor protection
- Pothole protection
- Audible motion alarm, horn and flashing beacon
- Low battery alert
- Battery charger with automatic switch-off
- Manual emergency lowering device
- Cylinder holding valve

Benefits

- ✓ Higher productivity thanks to the powered traction also allowed at full height
- ✓ Excellent manoeuvrability, safe, quick and precise positioning in very congested sites
- ✓ Large material tray, non-slip, adjustable in 8 positions
- ✓ It can be driven through standard doorways and carried in passenger elevators
- ✓ Ease of loading either by ramps, forklift pockets and crane lifting points
- ✓ Light and handy, with non marking tires, ideal for delicate and/or raised access flooring
- ✓ Outstanding battery capacity provides long endurance
- ✓ Battery charger with automatic compensation charge for long periods of inactivity. Just leave it ON.
- ✓ Emergency lowering device easy and quick to operate

Number of scissors		3
Platform dimensions	mm	700x620
Material tray dimensions	mm	500x620
Platform capacity (including 1 person)	kg	120
Material tray capacity	kg	80
Total capacity (including 1 person)	kg	200
Electric motor (power pack)	kW	2
Electric drive motors	V/kW	24/1
Battery	V/Ah	2 x 12/105
Battery charger	V	230
Oil tank capacity	l	2
Lifting time	s	17/20
Max side/longitudinal tilt angle	degrees	1,5/2,5
Gradeability	%	25
Traction speed	km/h	0 - 4
Safety traction speed	km/h	0,6
Internal turning radius	m	0
External turning radius	m	1,25
Total weight	kg	585

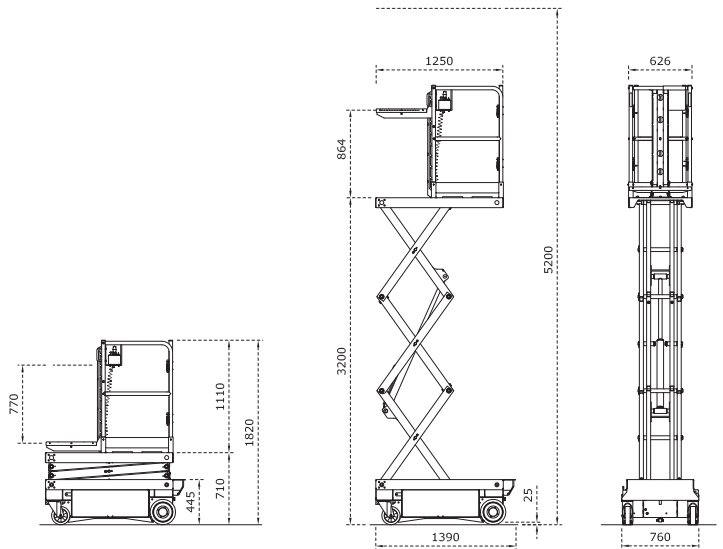

Large material tray, non-slip, adjustable in 8 positions.



Proper and ergonomic components disposition for easier and faster maintenance task.



Sturdy IP65, simple and intuitive control box.



Swivel castor interlock for straight line driving.



Ground control panel, intuitive and well protected from accidental bumps.



IMER International S.p.A.
Business Unit IMER Access
 Via San Francesco d'Assisi, 8 - 46020 Pegognaga (MN) - Italy
 Ph. +39 0376 554011 - Fax +39 0376 559855
www.imergroup.com