

Runs two shifts on one battery charge – guaranteed

3-phase AC technology delivers high performance and increased energy efficiency

Ergonomic operator compartment with height-adjustable operator controls

High flexibility through modular design and RFID technology

Optional warehouse NAVIGATION for customized travel time to a specific destination



## EKS 208 / EKS 308

Mid- to high-level order picker (2,200 - 3,000 lbs.)

The EKS 208 / 308 order pickers offer high picking performance in high-rack warehouse applications. Both lift truck models are customized for their respective applications.

With load capacities up to 2,200 lbs. and order picking heights up to 236 inches, the EKS 208 is specially designed for flexibility in wide aisles. However, its narrow chassis size of just 35.5 inches in width offers maximum maneuverability in very narrow aisles as well.

The EKS 308 with 3,000 lbs. load capacity and order picking heights up to 402 inches offers high throughput performance.


Run two shifts on one charge – the industry-exclusive Jungheinrich “2 Shifts, 1 Charge” program guarantees that the EKS 208 / 308 series will run for two full shifts on one battery charge – with no interim charging, no battery changing and no additional charging equipment needed.

Both order pickers set new standards in respect to flexibility, energy efficiency and ergonomics.

- There are a multitude of options available to match the EKS to your specific material handling application to better optimize ergonomics and productivity.
- The 3-phase AC technology ensures strong acceleration and high lifting speeds with low energy consumption.

- The integrated warehouse NAVIGATION (optional) allows direct communication between the order picker’s control system and the Warehouse Management System (WMS). This feature allows the lift truck to be driven to all destinations under semi-automatic control. This results in easier operation, a reduction in movement errors and a significant improvement in productivity and picking efficiencies.
- The spacious operator compartment provides ideal working conditions for ease of operation, resulting in greater productivity.
- The EKS 208 / 308 also includes a two-piece adjustable console for the operator, featuring a large informative electronic display of truck performance and status.

# EKS 208 / EKS 308

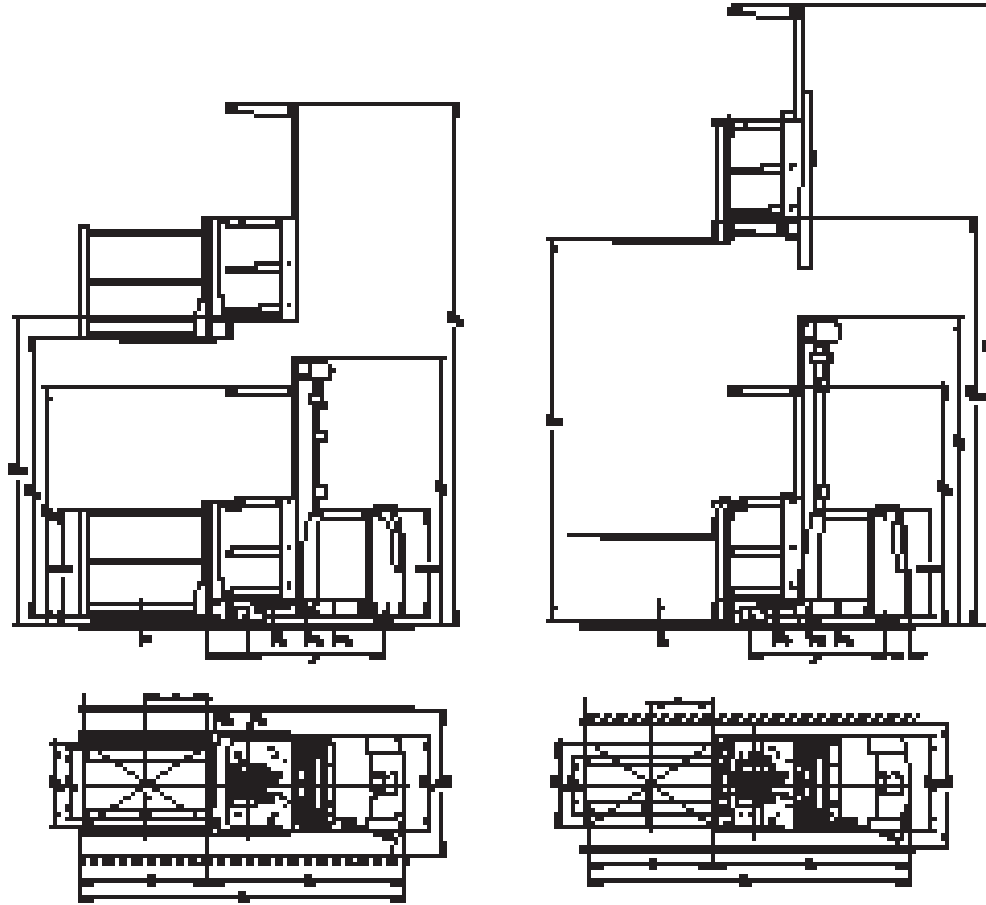

Mast Table - EKS 208								
Designation	MFH		OALH		FFH		OAEH	
	in	mm	in	mm	in	mm	in	mm
Two-Stage Mast	118	3,000	92	2,330	0	0	210	5,320
	137	3,500	102	2,580	0	0	230	5,820
	167	4,250	117	2,960	0	0	259	6,570
Three-Stage Mast	187	4,750	92	2,330	0.4	10	279	7,070
	216	5,500	102	2,580	10	260	308	7,820
	236	6,000	109	2,770	17	450	328	8,320
Mast Table - EKS 308								
Two-Stage Mast	196	5,000	132	3,330	0	0	289	7,320
	216	5,500	142	3,600	0	0	308	7,820
	255	6,500	163	4,125	0	0	348	8,820
	295	7,500	183	4,650	0	0	387	9,820
	334	8,500	203	5,150	0	0	426	10,820
Three-Stage Mast	187	4,750	92	2,330	0.3	10	279	7,070
	216	5,500	102	2,580	10	260	308	7,820
	236	6,000	109	2,770	18	450	328	8,320
	255	6,500	117	2,950	25	630	348	8,810
	275	7,001	123	3,120	31	800	367	9,320
	295	7,500	132	3,330	40	1,010	387	9,820
	326	8,300	142	3,600	50	1,280	419	10,620
	364	9,250	163	4,125	71	1,805	456	11,570
374	9,500	163	4,125	71	1,805	466	11,820	

# Technical data

as of: 05/2016

Characteristics	1.1	Manufacturer (abbreviation)		Jungheinrich		Jungheinrich		Jungheinrich			
	1.2	Manufacturer's type designation		EKS 208 – 48 Volt		EKS 308 – 36 Volt		EKS 308 – 48 Volt			
	1.3	Drive		electric							
	1.4	Operator type		order picker		order picker		order picker			
	1.5	Load capacity / rated load	Q	lb	kg	2,200	1,000	3,000	1,360	3,000	1,360
	1.6	Load center distance	c	in	mm	24	610	24	610	24	610
	1.8	Load distance, center of load axle to fork face	x	in	mm	6.9	175	5.9	150	5.9	150
	1.9	Wheelbase	y	in	mm	59.5	1,500	67	1,690	67	1,690
	Weights	2.1	Service weight including battery		lb	kg	6,500	2,950	8,300	3,750	8,300
2.2		Axle loading, loaded front / rear		lb	kg	6,900 / 2,025	3,116 / 914	8,000 / 2,675	3,624 / 1,207	8,000 / 2,675	3,624 / 1,207
2.3		Axle loading, unloaded front / rear		lb	kg	3,175 / 3,325	1,440 / 1,510	4,175 / 4,100	1,890 / 1,860	4,175 / 4,100	1,890 / 1,860
Wheels, Chassis	3.1	Tires		Vulkollan®							
	3.2	Tire size, load wheels	d <sub>1</sub>	in	mm	5.9 x 3.7	150 x 95	5.9 x 3.7	150 x 95	5.9 x 3.7	150 x 95
	3.3	Tire size, drive tire	d <sub>2</sub>	in	mm	9.8 x 3.1	250 x 80	13.5 x 4.3	345 x 110	13.5 x 4.3	345 x 110
	3.5	Number of tires: load wheels / drive tire		4 / 1							
	3.6	Track width		in	mm	30.5	780	34.5	880	34.5	880
	Dimensions	4.2	Closed mast height	h <sub>1</sub>	in	mm	92	2,330	132	3,330	132
4.3		Lift height	h <sub>3</sub>	in	mm	118	3,000	196	5,000	196	5,000
4.5		Overall extended height	h <sub>4</sub>	in	mm	210	5,320	289	7,320	289	7,320
4.6		Height of overhead guard (cabin)	h <sub>6</sub>	in	mm	92	2,320	92	2,320	92	2,320
4.7		Lowered platform height	h <sub>7</sub>	in	mm	9.7	245	9.7	245	9.7	245
4.8		Maximum platform height	h <sub>12</sub>	in	mm	128	3,245	206	5,245	206	5,245
4.9		Overall length (without load)	l <sub>1</sub>	in	mm	122	3,085	129	3,275	129	3,275
4.10		Length to fork face	l <sub>2</sub>	in	mm	74.5	1,885	82	2,075	82	2,075
4.11		Overall width	b <sub>1</sub> / b <sub>2</sub>	in	mm	35.5 / 35.5	900 / 900	39.5 / 39.5	1,000 / 1,000	39.5 / 39.5	1,000 / 1,000
4.12		Fork dimensions	s / e / l	in	mm	2 x 3.9 x 47	50 x 100 x 1,200	2 x 3.9 x 47	50 x 100 x 1,200	2 x 3.9 x 47	50 x 100 x 1,200
4.13		Width across forks	b <sub>5</sub>	in	mm	22	560	22	560	22	560
4.14		Width across guide rollers (minimum)		in	mm	43.5	1,100	47.5	1,200	47.5	1,200
4.15		Ground clearance, loaded, under mast	m <sub>1</sub>	in	mm	1.9	50	1.9	50	1.9	50
4.16	Ground clearance, center of wheelbase	m <sub>2</sub>	in	mm	2.3	60	2.3	60	2.3	60	
4.17	Minimum aisle width for pallet 48" x 40" - rail		in	mm	48	1,220	48	1,220	48	1,220	
4.18	Minimum aisle width for pallet 48" x 40" - wire		in	mm	52	1,321	52	1,321	52	1,321	
4.19	Turning radius	Wa	in	mm	65	1,650	73.5	1,860	73.5	1,860	
Performance	5.1	Travel speed, loaded / unloaded		mph	km/h	6.5 / 6.5	10.5 / 10.5	7.1	11.5	7.1 / 7.1	11.5 / 11.5
	5.2	Lift speed, loaded / unloaded		ft/min	m/s	57 / 61	0.29 / 0.31	61 / 76	0.31 / 0.39	68 / 76	0.35 / 0.39
	5.3	Lowering speed, loaded / unloaded		ft/min	m/s	66 / 61	0.34 / 0.31	76 / 72	0.39 / 0.37	76 / 72	0.39 / 0.37
	5.4	Service brake		regenerative							
	5.5	Parking brake		electric spring loaded							
Motors	6.1	Drive motor rating S2 60 min.	hp	kW	4.0	3.0	9.2	6.9	9.2	6.9	
	6.2	Lift motor rating at S3 25%	kW/hp	kW	12.6 / 9.5	9.5	10.0	7.5	12.6 / 9.5	9.5	
	6.4	Battery compartment size ( L x W x H )	in	mm	17.7 x 33.2 x 32.1	845 x 450 x 817	21.2 x 37.2 x 32.1	945 x 540 x 817	21.2 x 37.2 x 32.1	945 x 540 x 817	
	6.5	Battery voltage, nominal capacity	k <sub>s</sub>	V	Ah	48	500	48	500	48	500
	6.7	Minimum battery weight		lbs	kg	1,980	900	1,980	900	1,980	900
	Other Details	8.1	Type of drive control		AC drive control						
8.4		Sound level at the driver's ear according to ANSI / ITSDF B56.1		dB (A)	58		63		63		
8.6		Steering		electric							

Right reserved for technical changes and improvements

\*) tentative data

\*\*) tandem wheels

\*\*\*) +30 mm in combination with PPS

Non-standard tires, different masts, additional equipment, etc., could produce other values. Rights reserved for technical changes and improvements.

# The Jungheinrich Advantage

## Efficient 3-phase AC technology

There are now more than 400,000 Jungheinrich-built trucks with 3-phase AC technology in use worldwide. This level of experience and expertise is incorporated into our current motor and controller technology:

- High overall performance.
- Smooth, rapid acceleration during travel, lifting and lowering.
- Low power consumption.
- Effective thermal management.
- Reduced wear on components.
- Reduced maintenance.

## Modular design

High flexibility through modular design, including:

- Large range of chassis and cabin width options.
- Flexible operating console concept.
- Rigid mast for increased durability.
- Optional mechanical rail guidance or wire guidance.

## Energy management features

- Advanced energy and battery management results in longer runtime.
- Regenerative braking and lowering provides double energy-saving benefits.
- Workplace lighting using energy-saving LED working lights.
- Battery rollers for quick battery exchange.

## Ergonomics and comfort

- Spacious operator platform.
- Low cabin platform height – only 9.7 inches.
- Ample headroom.
- Easy access to pallets during order picking.
- Outstanding field of vision through the mast.
- Height-adjustable operating console with generous storage space.
- Configurable membrane keyboard with numeric pad.
- Interactive display with programming keypad for easy use.
- Thumb-activated drive control.

## Control system (CAN-Bus)

- All performance parameters can be adjusted to match the specific application needs.
- Electronically-controlled drive wheel braking.

## Ease of serviceability

- Quick and reliable truck operation using “teach-in” truck set-up principles.
- Remote diagnostics using a modem.

## Jungheinrich warehouseNAVIGATION (optional)

- Identification of the picking destinations within the aisle via the truck controller.
- Automatic vertical and horizontal lift truck positioning.
- High degree of automation.
- Improved order-picking performance.
- Optimized truck movements.
- RFID location detection helps eliminate picking errors.
- Links the EKS to a Warehouse Management System (WMS) using a radio data terminal and/or a scanner.
- High flexibility in the warehouse as the existing WMS can be modified to cater to warehouse modifications.
- Activation of the LED spotlights upon reaching the picking destination (optional).

## RFID floor control (optional)

- Truck location management by transponder technology.
- Continuous travel distance measurement for precise recognition of all warehouse areas.
- High flexibility for truck management functions (end of aisle recognition, lift/drive cut-outs, speed reduction).
- Drive speeds can be customized to the specific warehouse layout.

## Additional options

- Mechanical rail guidance.
- Wire guidance for precise operation within the aisle without any mechanical stress on components.
- Workplace comfort package with LED internal cabin lighting, LED working lights and operator fan.
- Lift height pre-selection.
- Operator keypad access by PIN code.
- Auxiliary mast.



Ergonomic operator compartment

## Parts when you need them

Jungheinrich's Parts Fast or Parts Free Guarantee ensures next-business-day delivery by 5:00 PM of all Jungheinrich parts in the United States, or they're free, including freight. For customers in Canada and Mexico, the guarantee ensures shipping of parts within 24 hours from the time the order was placed by the dealer. See your local Jungheinrich dealer for program details.

- Programs may be subject to change without notice and may vary by region. Please ask your local Jungheinrich dealer for complete terms and conditions.