

Specification sheet

FA CF75



072F7507DGAA - 201949c - 29-08-2019

ENGINES

CF75 250
CF75 250
CF75 310
CF75 310
CF75 360

GVM¹⁾

17500 kg

Max. front 7500 kg

Max. rear 10000 kg

GCM²⁾

38000 kg

Ukraine, Truck Centre Ltd, www.daf.com

CAB EXTERIOR

Mechanically suspended Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; Manually adjustable main mirrors; No front view mirror.

Optional

02106 Sleeper Cab	06166 Combi lights in bumper
01137 Space Cab	07313 Combi lights led in bumper
01226 Cab suspension air	06592 Four spot lights on the cab roof
08071 Xenon head lights with washer	06593 Skylights
00396 Permanent driving lights	06591 Two spot lights on the cab roof

AERODYNAMICS

Optional

04906 Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel, bumper and step cover: grey; C4P500GRY Chassis colour grey.

Optional

09932 Head lamp panel, bumper and step cover: Br White	04198 Mirror covers in cab colour
09931 Head lamp panel, bumper and step cover: cab colour	16153 Cab and chassis colours

CAB INTERIOR

Driver seat: Comfort Air; Co-driver seat: basic; Storage box on engine tunnel; Roof hatch glass, manual control.

Optional

09271 Steering wheel, leather, colour black	06539 Refrigerator
06111 Dashboard: wood structure	01245 Air conditioning
02117 Third seat	06599 Auxiliary cab heater (air)

COMMUNICATION AND DRIVING MANAGEMENT

No Fleet Management System; Tachograph mechanical; Speed limiter setting 85 km/h nominal; Antennas: AM/FM, 2x GSM, GPS; Cruise control.

Optional

09681 Preparation for Maut	09721 Handsfree telephone kit
16155 Audio equipment, makes and types	09909 Adaptive Cruise Control (ACC) with FCW

SAFETY AND SECURITY

Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	01725 Reverse warning
09992 Lane Departure Warning System	

SUSPENSION AND AXLES

Front: 7.50 t, parabolic, 152N; Rear: 13.00 t, air suspension, SR1347.

Optional

06257 Front axle load 9.00 t	01603 Rear springs parabolic
04057 Rear axle HR1356	03345 Rear springs parabolic, short
01800 Rear axle SR1344	

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Rear axle 1: 295/80R22.5; Spare: 295/80R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

PR183, 183 kW/249 hp, 45C HD. Cab badge: 250; Exhaust emission Euro 3; No engine idle shutdown; Manual gearbox, 9 speeds; Gearbox ratio 9.48-0.75; Rear axle ratio 5.13; Mechanical differential lock.

Optional

04001 Exhaust emission Euro 5	02313 Gearbox direct drive
04500 AS Tronic gearbox, 12 speeds	03721 ASR

BRAKE SYSTEM

ABS.

Optional

02715 ZF Intarder	04901 Spring brake cylinders on the first front axle
--------------------------	---

CHASSIS

Wheelbase 4.50 m / rear overhang 1.95 m; Side member height 310 mm; Steel fuel tank 300 l, height 580 mm; No spray suppression; No front underrun protection; No AdBlue tank; Spare wheel carrier side.

Optional

16157 Fuel tanks, material and sizes	13487 AdBlue tank 60 litres
---	------------------------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; No electric trailer connection.

Optional

04624 Closing member	07032 D-value cross member D=20
-----------------------------	--

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front; Side marker lights.

Optional

04331 Appl connector including air control prep	02597 Application connector for tail lift control
06692 Application connector on the chassis	09240 Application connector for refuse collector

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

04873 Alternator 110 A	08797 Batteries 2x175Ah
-------------------------------	--------------------------------

GVM AND GCM

Chassis weight related technical GVM max 20500 kg; Driveline related max GCM 38000 kg class 2.

APPLICATION CONDITIONS

Moisture separator, heated; Cyclonic air intake behind the cab.

Optional

02270 Cold climate



SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

FA CF75

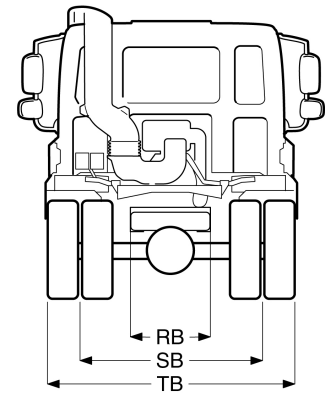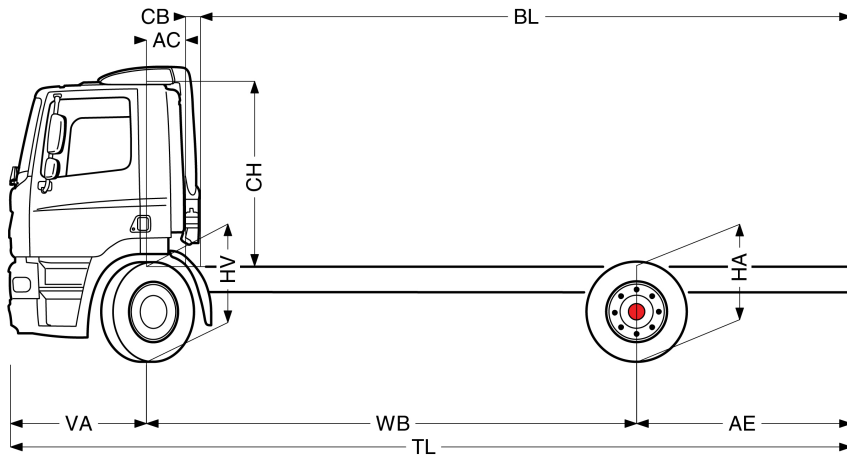

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁸⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
SPACE CAB	4.00	1.70	4340	2211	6550	3160	7789	10950	0.82	0.18	2.48	3.70	3.70	7.08	1.11	0.99	13.94	15.45
	4.20	1.80	4337	2238	6575	3163	7762	10925	0.82	0.18	2.48	3.97	3.97	7.38	1.11	0.99	14.46	15.98
	4.50	1.95	4341	2267	6608	3159	7733	10892	0.82	0.18	2.48	4.40	4.40	7.83	1.04	1.01	15.24	16.77
	4.70	2.05	4338	2281	6620	3162	7719	10880	0.82	0.18	2.48	4.68	4.68	8.13	1.04	1.01	15.76	17.30
	4.90	2.15	4338	2306	6644	3162	7694	10856	0.82	0.18	2.48	4.96	4.96	8.43	1.04	1.01	16.28	17.82
	5.10	2.30	4332	2330	6662	3168	7670	10838	0.82	0.18	2.48	5.23	5.23	8.78	1.04	1.01	16.80	18.35
	5.40	2.40	4392	2444	6836	3108	7556	10664	0.82	0.18	2.48	5.66	5.66	9.18	1.04	1.01	17.59	19.14
5.70	2.65	4400	2501	6901	3100	7499	10599	0.82	0.18	2.48	6.08	6.08	9.73	1.04	1.01	18.37	19.94	
DAY CAB	4.00	1.70	4168	2211	6379	3332	7789	11121	0.39	0.20	1.81	4.43	4.43	7.08	1.11	1.00	13.94	15.45
	4.20	1.80	4165	2238	6403	3335	7762	11097	0.39	0.20	1.81	4.70	4.70	7.38	1.11	1.00	14.46	15.98
	4.50	1.95	4171	2266	6437	3329	7734	11063	0.39	0.20	1.81	5.12	5.12	7.83	1.04	1.01	15.24	16.77
	4.70	2.05	4168	2280	6448	3332	7720	11052	0.39	0.20	1.81	5.40	5.40	8.13	1.04	1.01	15.76	17.30
	4.90	2.15	4168	2305	6473	3332	7695	11027	0.39	0.20	1.81	5.67	5.67	8.43	1.04	1.01	16.28	17.82
	5.10	2.30	4162	2329	6491	3338	7671	11009	0.39	0.20	1.81	5.94	5.94	8.78	1.04	1.01	16.80	18.35
	5.40	2.40	4222	2443	6664	3278	7557	10836	0.39	0.20	1.81	6.36	6.36	9.18	1.04	1.01	17.59	19.14
5.70	2.65	4230	2500	6730	3270	7500	10770	0.39	0.20	1.81	6.77	6.77	9.73	1.04	1.01	18.37	19.94	
SLEEPER CAB	4.00	1.70	4241	2212	6452	3259	7788	11048	0.82	0.18	1.81	3.65	3.65	7.08	1.11	0.99	13.94	15.32
	4.20	1.80	4238	2239	6477	3262	7761	11023	0.82	0.18	1.81	3.92	3.92	7.38	1.11	0.99	14.46	15.85
	4.50	1.95	4243	2267	6510	3257	7733	10990	0.82	0.18	1.81	4.34	4.34	7.83	1.04	1.01	15.24	16.64
	4.70	2.05	4240	2281	6522	3260	7719	10978	0.82	0.18	1.81	4.62	4.62	8.13	1.04	1.01	15.76	17.17
	4.90	2.15	4240	2306	6546	3260	7694	10954	0.82	0.18	1.81	4.89	4.89	8.43	1.04	1.01	16.28	17.69
	5.10	2.30	4234	2330	6564	3266	7670	10936	0.82	0.18	1.81	5.16	5.16	8.78	1.04	1.01	16.80	18.22
	5.40	2.40	4294	2444	6737	3206	7556	10763	0.82	0.18	1.81	5.59	5.59	9.18	1.04	1.01	17.59	19.02
5.70	2.65	4302	2501	6803	3198	7499	10697	0.82	0.18	1.81	6.00	6.00	9.73	1.04	1.01	18.37	19.81	

OTHER DIMENSIONS VA: 1.38 HV¹³⁾: 1.04 HV¹⁴⁾: 0.98 RB: 0.79 SB: 1.82 TB: 2.45

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 300 litres of fuel, 0 litres of AdBlue and driver of 80 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch. With air intake on cab roof: +0.14 m.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.