Demolition Recycler




(GDR)



FEATURES

- Reverse-mounted cylinder protects cylinder rod from debris
- 2 Tight fit between the cylinder, body and upper jaw minimizes the risk of debris damaging internal components
- 3 360° rotation comes standard with every GDR
- Combination of a large-bore cylinder and a regeneration valve eliminates the need for an intensifier and a complex hydraulic system
- 5 Built with Weldox steel for the best combination of structural strength and wear durability
- Heavy-duty pivot design with recessed end caps provides structural strength and long-term durability
- Indexable blades provide two useable cutting edges
- Extended chin aids in positioning concrete for processing
- 9 Bolt-on teeth and blades reduce maintenance time
- Weld-on tooth and blade pockets greatly improve the ability to maintain the jaws, extending the GDR's useful life
- Extended upper plate aids in positioning concrete for processing

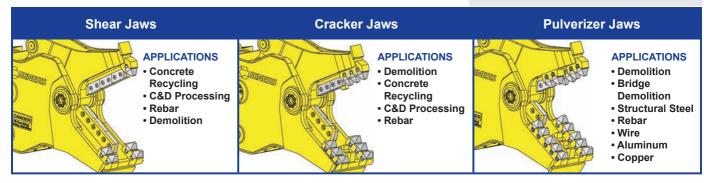

Model Number	Weight*	Jaw Opening	Jaw Depth	Tip Force at 5000 psi	Typical Reach	Minimum Excavator Wt.
	(lbs.)	(ins.)	(ins.)	(tons)	(ft. ins.)	Stick Mounted (lbs.)
GDR 150	3,450	26	25	85	64	28,000
GDR 200	5,500	35	32	115	77	45,000
GDR 300	7,900	43	39	147	89	70,000

^{*}Weight will vary according to specified jaw configuration.

All Genesis Demolition Recyclers are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance.



PALADIN
DEMOLITION AND RECYCLING

1000 Genesis Drive, Superior, WI 54880

888-SHEAR-IT (743-2748) - Tel: 715.395.5252 - Fax: 715.395.5255 genesisattachments.com - info@genesisattachments.com

© 2011 Genesis Attachments, LLC GDR 6/11