


Versi Pro 15 (GVP 15)

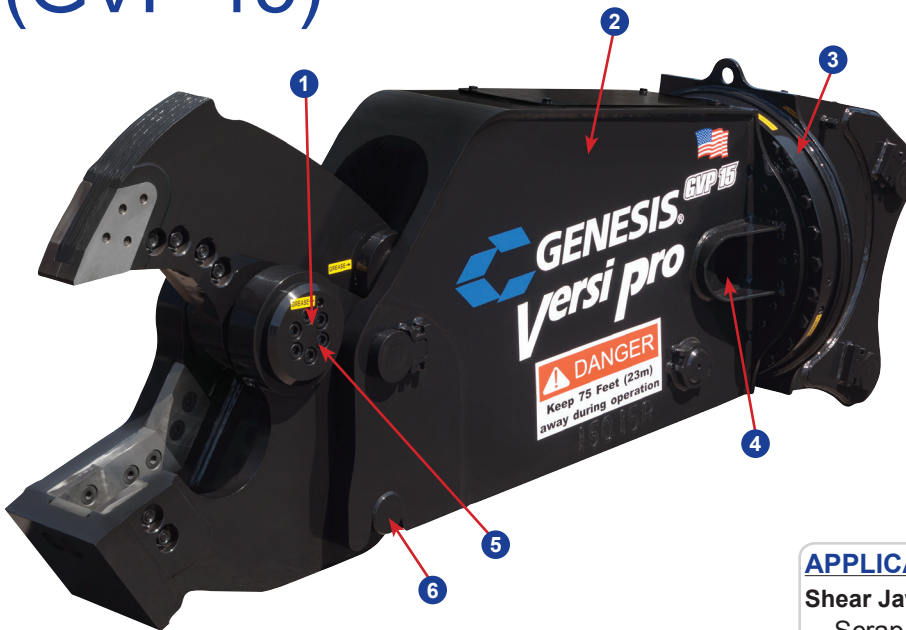

FEATURES

- 1 Patented pivot system provides a power curve to match each jaw set's primary application
- 2 Built with Strenx™ steel for the best combination of structural strength and wear durability
- 3 360° rotation comes standard with every Versi Pro
- 4 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 5 Each jaw's pivot group stays intact, allowing the use of a press-fit pin design for a stronger, more durable product and making jaw change-outs safe, easy and fast
- 6 Jaw change-outs in 10 minutes with the coupler-style connection system

APPLICATIONS

Shear Jaws


- Scrap Processing
- Demolition
- Rebar
- Wire
- Tires
- Many types of non-ferrous

Cracker Jaws

- Demolition
- Concrete Recycling
- C&D Processing

Shear Jaws

Cracker Jaws

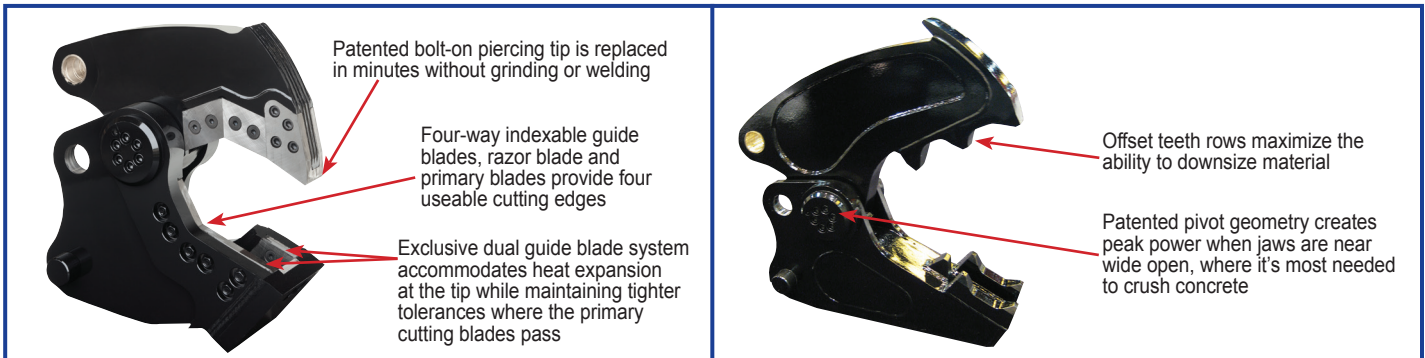

Metric Specs:

Jaws	Weight* (kg)	Jaw Opening (mm)	Jaw Depth (mm)	Reach** (mm)	Minimum Excavator Wt. Boom Mount (mt)
Shear	1,451	406	381	2,261	13
Cracker	1,451	635	635	2,515	13

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

The stability of each lift class varies between OEM excavator models. Please consult with your Genesis salesperson for recommended carrier models. Every Genesis Versi Pro 15 is covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Strenx™ is a trademark of SSAB.

Patents: genesisattachments.com/patents



1000 Genesis Drive, Superior, WI 54880
888-SHEAR-IT (743-2748) - Tel: 715.395.5252 - genesisattachments.com