



RC

WHEEL LOADER ROCK BUCKET

FEATURES :

RC buckets are available for machines from **7 to 55 tons**.

With its very **robust design**, the Roc bucket can be used in **extreme conditions**, especially in **very abrasive applications such as quarry loading**.

It is made of abrasion-resistant steel on the double bottom, blades, wear pads, anvil-blades, protective bands.

The bucket is adapted to the machine as well as the materials manipulated.

**SECURITY
ROBUSTNESS**


ADVANTAGES :

- Adaptable for loaders from 7 to 50 tons.
- Ideal for block handling and quarry loading.
- Bucket designed for rapid and optimum filling according to your machine and your application.
- Made in all sizes and for all loaders.
- Available as original or quick attach.
- Equipped with belts on the bottom, a double bottom and commas on the sides in anti-abrasion steel.
- Possibility to adapt all standard teeth as needed

OPTIONS :

Welded bimetal pads
Headband protectors Shields
between teeth

TECHNICAL DIAGRAM

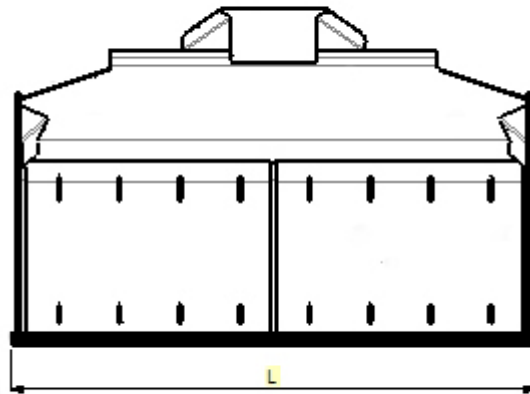

TECHNICAL SPECIFICATIONS

| Technical characteristics | | | | |
|---------------------------|--------------|---------------|------------|-------------|
| Carrier weight | Reference | Length | Capacity | Weight |
| <i>Carrier model (t)</i> | <i>Ref.</i> | <i>L (mm)</i> | <i>(l)</i> | <i>(kg)</i> |
| 300 (7 - 12) | L31RC | 2400 | 2010 | 940 |
| | | 2400 | 2500 | 1050 |
| 400 (12 - 18) | L41RC | 2800 | 2770 | 1510 |
| | | 2800 | 3400 | 1662 |
| 500 (18 - 23) | L51RC | 3000 | 3895 | 2330 |
| | | 3000 | 4700 | 2600 |
| 600 (24 - 34) | L61RC | 3400 | 5300 | 3330 |
| | | 3400 | 7500 | 4200 |