



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
TELESCOPIC
AERIAL DEVICE

FEATURES

- Non-Insulating Three-Stage Hydraulically Sequenced Telescopic Aerial Device
- 60 x 36 x 45 in (1524 x 914.4 x 1143 mm) reach through Aluminum Platform with 600 lb Capacity
- Hydraulic Self-Leveling Platform
- Quick Disconnect Platform
- 180° Platform Rotation
- Single-Handle Electric/Hydraulic Proportional Joystick Controls
- Out and Down Primary Outriggers
- Down Only Auxiliary Outriggers
- Outrigger Motion Alarm
- Short Jacking Option using Rotational Interlocks on Outriggers
- Hydraulic Overload Protection System (HOP)
- Emergency Power
- 360° Continuous Rotation
- Engine Start/Stop at all Control Stations
- Emergency Stop at Upper and Lower Control Stations
- Catwalk Over Chassis Cab for Platform Access
- Truck Level Indicators
- Back Up Alarm
- Minimum 25,999 GVWR Under CDL Chassis


SPECIFICATIONS	Ground to Bottom of Platform	55.7 ft	16.9 m
	Working Height*	60.7 ft	18.5 m
	Maximum Side Reach	53.1 ft	16.2 m
	Stowed Travel Height	12.4 ft	3.8 m
	Platform Capacity	600 lb	159 kg
	Platform Rotation	180°	
	Boom Articulation	-20° to 80°	
	Rotation	Continuous	
* Based on 40 in (1016 mm) chassis Aerial Operation ANSI A92.2 Compliant Crane Operation ASME B30.5 Compliant			

OPTIONS

- Multi-Handle Proportional Controller
- 500 lb Capacity Platform Jib Winch Stowed at Platform
- 5900 lb Primary Boom Winch with Anti-Two Block Switch
- 2000 lb Primary Boom Winch with Anti-Two Block Switch
- Primary Winch Cable Compression Roller
- Welder/Generator with Remote Start/Stop
- Weld Leads at the Platform
- 110V Power Source at the Platform
- Trailer Tow Packages
- Thru-Box and Underslung Boxes for Storage
- Flatbed Body Configurations with Wood or Steel Deck

Recommended safety equipment, available through Altec Supply, include fall protection system, wheel chocks and outrigger pads.


REACH DIAGRAM

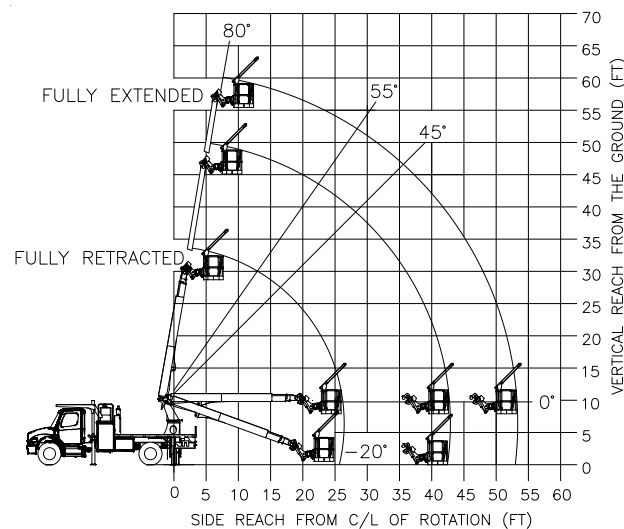

SMALL FOOTPRINT ALLOWS OPERATORS TO SAFELY SET-UP IN TIGHT SPOTS



180° PLATFORM ROTATION FOR A SAFER AND SMARTER WORK AREA

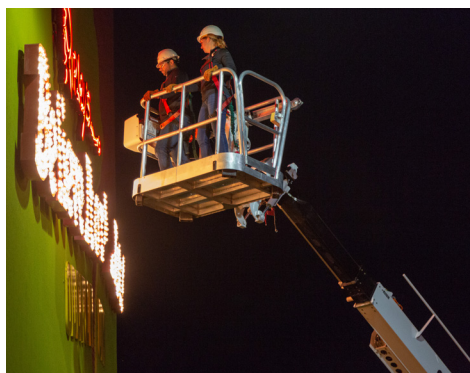

OPTIONAL 500 LB CAPACITY JIB STOWS IN PLATFORM FOR EASY ACCESS



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2018 Altec Inc. All Rights Reserved. AIO/LS60-0718-v3

