





Logix Processor (LXP)



FEATURES

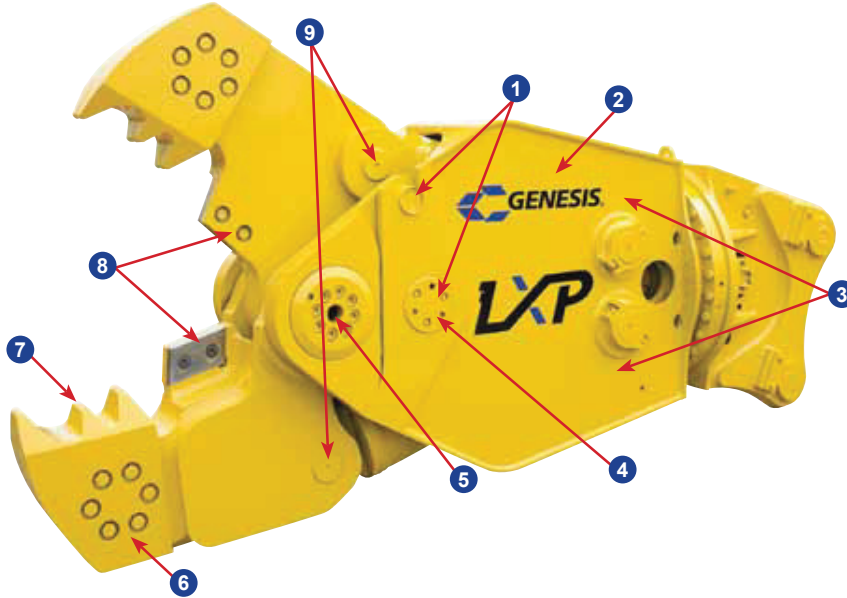

- 1 Jaw change-outs in 15 minutes with the coupler style connection system, hydraulically activated lock pin, jaws that stay intact and a stand with every jaw set – safe, easy and fast
- 2 Enclosed structure adds strength and rigidity while protecting the cylinders
- 3 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 4 Patented pivot geometry creates peak power when jaw is fully open, where it's most needed to crush large concrete
- 5 Patented pivot system provides a power curve to match the jaw's primary application. Each jaw's pivot group stays intact, allowing the use of a press fit design for a stronger, more durable product. Heavy-duty pivot design with recessed caps provides structural strength and long-term durability.
- 6 Teeth are easy to change and fully protect the parent material, eliminating the need for build-up and hardsurfacing
- 7 Cracker tips concentrate force for a greater ability to crush through heavy concrete
- 8 Bolt-on cutting blades are four-way indexable
- 9 Reverse mounted cylinders protect the rods from debris


Shear Jaws	Cracker Jaws	Pulverizer Jaws
 <p>APPLICATIONS</p> <ul style="list-style-type: none"> • Demolition • Bridge Demolition • Structural Steel • Rebar • Wire • Aluminum • Copper 	 <p>APPLICATIONS</p> <ul style="list-style-type: none"> • Concrete Recycling • C&D Processing • Rebar • Demolition 	 <p>APPLICATIONS</p> <ul style="list-style-type: none"> • Demolition • Concrete Recycling • C&D Processing • Rebar

Metric Specs:

Model Number	Typical Weight* (kg)	Typical Reach* (mm)	PULVERIZER		SHEAR		CRACKER		Minimum Excavator Wt.	
			Jaw Opening (mm)	Jaw Depth (mm)	Jaw Opening (mm)	Jaw Depth (mm)	Jaw Opening (mm)	Jaw Depth (mm)	Boom Mounted (mt)	Stick Mounted (mt)
LXP 200	2,570	2,350	737	610	432	483	965	711	9	20
LXP 300	3,450	2,610	889	660	559	610	1,092	762	20	31
LXP 400	5,110	2,910	965	762	610	686	1,194	851	27	45
LXP 500	5,860	3,030	1,092	787	686	711	1,295	876	31	54

*Typical weight and typical reach will vary slightly according to jaw set and mounting bracket configuration.
 All Genesis Logix Processors are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Genesis reserves the right to continually make product improvements designed to positively enhance performance.


Pulverizer Jaws

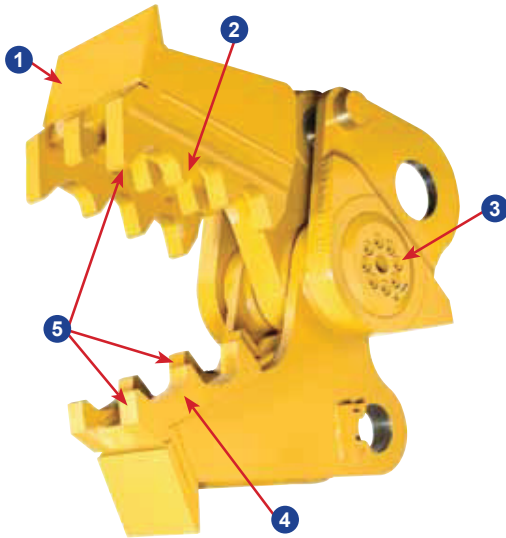

FEATURES

- 1 Extended wear plates aid in positioning concrete for processing
- 2 Bolt-on tooth bed features a fully replaceable crushing surface, eliminating the need for welding
- 3 Patented pivot geometry creates peak power when jaws are fully open, where it's most needed to crush concrete
- 4 Tooth profile maximizes crushing force, pulverizing concrete from rebar like no other processor
- 5 Teeth extend to protect parent steel from wear and abrasion

Shear Jaws

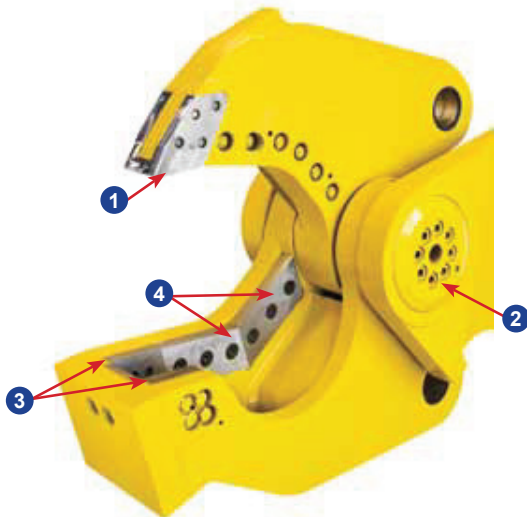

FEATURES

- 1 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 2 Patented pivot geometry creates peak power for piercing and cutting
- 3 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass
- 4 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges

Jaw Stands



Weight:
680 - 780 lbs.



PALADIN
DEMOLITION AND RECYCLING

1000 Genesis Drive, Superior, WI 54880

888-SHEAR-IT (743-2748) – Tel: 715.395.5252 – Fax: 715.395.5255

genesisattachments.com – info@genesisattachments.com