


# SCISSOR LIFTS ECo 7 EC

**S05-7EC**  
Working height 5.0 m

**S06-7EC**  
Working height 5.9 m

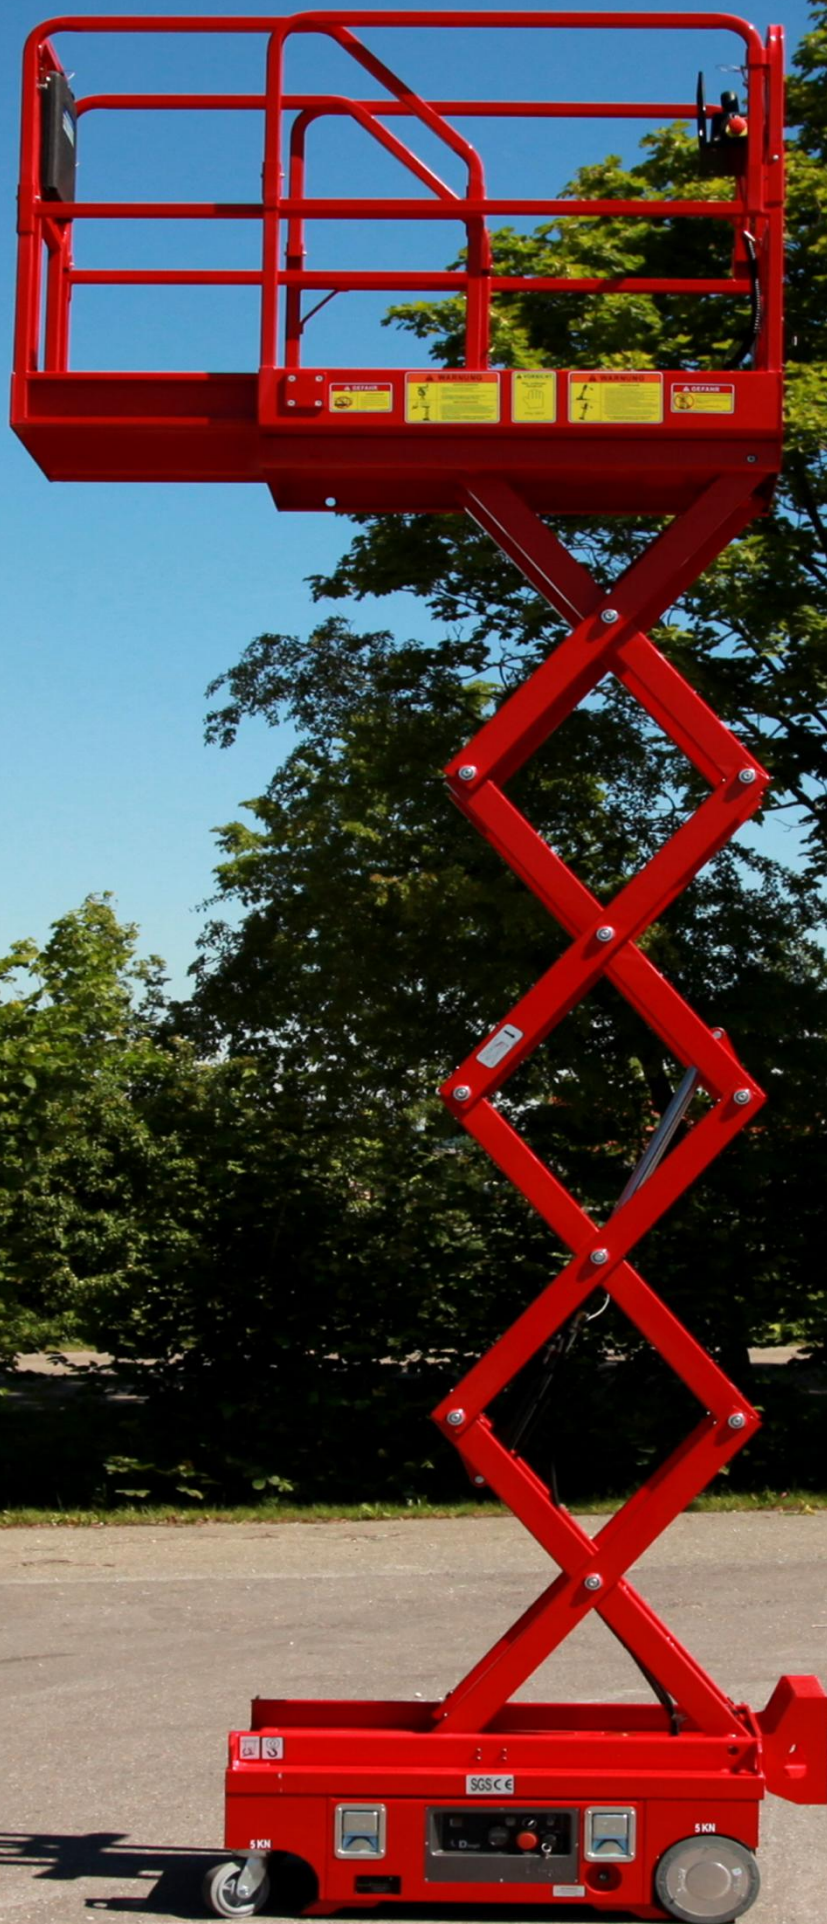

# ECo 7 EC

Width 0,76 m



PB Liftechnik GmbH

Gewerbegebiet Gassenäcker  
89429 Oberbechingen / Germany

Telefon: +49 (0) 90 77 – 95 00 – 0

Telefax: +49 (0) 90 77 – 95 00 – 40

E-Mail: [info@PBgmbh.de](mailto:info@PBgmbh.de)

Website: [www.PBgmbh.de](http://www.PBgmbh.de)

TYPE	S05-7EC	S06-7EC
Operation area	in/+outdoor	in/+outdoor
Drive		electric direct drive
Working height /outdoor	5.00 / 4.50 m	5.90 / 4.50 m
Platform height – raised /outdoor	3.00 / 2.50 m	3.90 / 2.50 m
Drive speed - raised	0.8 km/h	0.8 km/h
Drivable at full height	Yes	Yes
Drive speed - stowed	4.0 km/h	4.0 km/h
Lift capacity	240 kg	240 kg
Platform occupancy - inside	1 P.	1 P.
Lift capacity platform extension	100 kg	100 kg
Platform size (l x w)	1.15 x 0.70 m	1.15 x 0.70 m
Platform size max. (l x w)	1.70 x 0.70 m	1.70 x 0.70 m
Overall width	0.76 m	0.76 m
Overall length	1.15 m	1.15 m
Overall height - stowed	1.85 m	1.94 m
Transport height rails folded	1.41 m	1.50 m
Turning radius - outside	1.10 m	1.10 m
Ground clearance - center	0.05 m	0.05 m
Gross weight	554 kg	615 kg
Motor power (drive / raise)	2 x 0.4 / 0.8 kW, 24V	2 x 0.4 / 0.8 kW, 24V
Battery capacity (5 h)	55 Ah	55 Ah
Gradability	25 %	25 %

#### Technical Standards:

- Tested to DIN EN 280 / CE-mark
- Coating: Priming and top-coating

#### Operation Standards:

- Proportional control (drive / raise)
- Fully automatic charger
- Battery deep discharge protection
- Non-marking tires
- Foldable platform rails: Easy transport in a box-type van
- Lifting lugs
- Control-socket at the platform
- Additional control panel at the undercarriage
- Forklift slots

#### Safety Standards:

- Tilt control with safety shutdown
- Weight control for platform
- Emergency lowering system – manual
- Additional battery main switch at the chassis

Technical data are subject to change.

