

Pulverizer 950/1050



High performance special tool for pulverizing

With 360° endless hydraulic rotation or fixed

Oil supply for rotation unit by integrated couplers of the A-Lock

Exchangeable, turnable cutting edge for reinforcement steel


Jaw enforced with surface layer welding

Steel in Hardox quality



Technical details

Model:	FU 950	FU 1050
Max. opening	950 mm	1050 mm
Depth of bite	850 mm	890 mm
Jaw width	540 mm	600 mm
Hydraulic data:		
Max. breaking force at 350 bar	131 to	175 to
Open - close	max. 350 bar, max. 240 l/min	max. 350 bar, max. 275 l/min
Time for open / close	3,28 / 1,23 sec	5,56 / 2,63 sec
Time with "Speed up"-valve	1,54 / 1,23 sec	2,02 / 2,63 sec
Rotation	max. 200 bar @ 20-25 l/min	
Data of cutting edge:		
Opening in the middle of the edge	307 mm	330 mm
Length of cutting edge	160 mm	175 mm
Cutting force (middle of the edge)	202 to	284 to
Weight:		
Turnable models Excavator weight	2.010 kg > 20 to	2.800 kg > 30 to
Fixed models Excavator weight	1.750 kg > 18 to	2.500 kg > 28 to

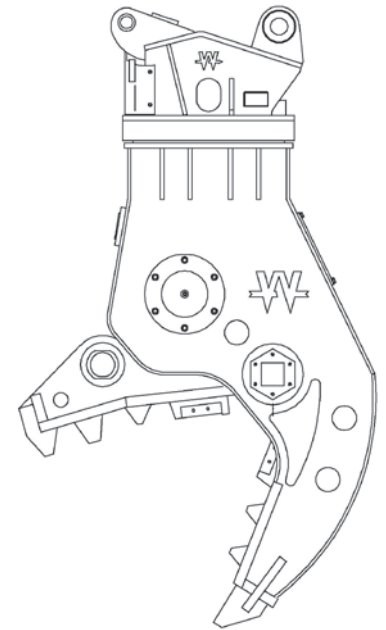

All rights and errors reserved.

Version 0113

WIMMER Hartstahl GmbH.&Co.KG. und WIMMER Felstechnik GmbH.
Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel. +43 (0)6235 6655-0, Fax DW-18

WIMMER Felstechnik GmbH in Deutschland, Niederlassung Rietberg,
Weidenweg 31, 33 397 Rietberg, Tel. +49 (0)5244 906-133, Fax DW-150

WIMMER Canada Inc., 6683 Jean Talon Est, Suite 432, Saint Leonard, QC, H1S 0A5,
Canada US phone line: 8778379240

WIMMER International CZ s.r.o., Rudolfovská 170 a, 370 01 České Budějovice,
Tel. +420 387 203 735, Fax +420 387 203 736

office@wimmer.info

Auth. WIMMER-Dealer: