



**RHB-series**



# RHB

## Rotar Hydraulic Hammer

The RHB series is reliable, service-friendly and extremely strong, meaning that the Rotar Hydraulic Hammer literally strikes your projects home!




### Quiete and reliable

This innovative hydraulic hammer has only two movable parts, making it a lot less vulnerable than its competitors. Due to its contemporary design, it is one of the quietest and most reliable hydraulic hammers on the market.

### Extremely efficient and give it enormous impact energy


Hybrid technologies make this hammer extremely efficient and give it enormous impact energy. The RHB series is furthermore fitted with a power booster for extra hammering strength. Double chisel holders secure the blade and absorb torque forces, and thanks to their oval shape they can be used twice.



### Effortlessly provides you with the desired effect

Whether you need punching, breaking or penetration power, a variety of chisel types effortlessly provides you with the desired effect. The RHB series can furthermore be fitted with an automated lubrication system for increased longevity.

# Specifications

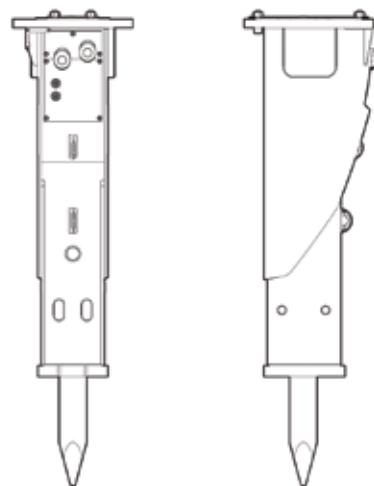

Type RHB-Light	20	30	40	60	80
<b>Information</b>					
Machine class (t)	1,3 - 3	2,1 - 4,5	2,9 - 6	4,2 - 9	5,2 - 12
Weight (kg)	117	166	233	284	380
Oil volume (L/min)	15 - 35	30 - 50	35 - 60	45 - 75	60 - 90
Operating pressure (bar)	110 - 130	110 - 140	110 - 140	110 - 140	120 - 150
Blow frequency (pbm)	560 - 1700	670 - 1450	520 - 1150	530 - 1150	530 - 1050
Working tool diameter (mm)	42	52	62	70	80
Rotar Hole-pattern	105	105	125	125	125
<b>Type RHB-Medium</b>	<b>110</b>	<b>140</b>	<b>180</b>	<b>220</b>	<b>260*</b>
<b>Information</b>					
Machine class (t)	9 - 15	10 - 17	15 - 24	17 - 28	20 - 33
Weight (kg)	550	800	1200	1500	1800
Oil volume (L/min)	70 - 100	100 - 120	120 - 140	140 - 160	130 - 180
Operating pressure (bar)	120 - 150	150 - 170	150 - 170	150 - 170	150 - 170
Blow frequency (pbm)	590 - 1100	650 - 850	550 - 720	520 - 680	380 - 650
Working tool diameter (mm)	80	100	120	135	140
Rotar Hole-pattern	135	135	145	145	145
<b>Type RHB-Heavy</b>	<b>300*</b>	<b>380*</b>	<b>460*</b>	<b>540*</b>	
<b>Information</b>					
Machine class (t)	25 - 40	29 - 46	29 - 46	45 - 70	
Weight (kg)	2200	2600	3000	4200	
Oil volume (L/min)	150 - 200	180 - 220	210 - 260	250 - 320	
Operating pressure (bar)	150 - 170	160 - 180	160 - 180	160 - 180	
Blow frequency (pbm)	380 - 620	380 - 590	380 - 580	350 - 560	
Working tool diameter (mm)	150	155	165	180	
Rotar Hole-pattern	155	155	205	205	

\* Power control: The blow frequency and impact energy can be adjusted to better meet the application requirements

## Rotar International BV

**Address** Schering 27, 8281 JW Genemuiden (NL)

**Postal address** Postbus 174, 8280 AD Genemuiden (NL)

**Telephone** +31(0) 38 385 54 71

**Fax** +31(0) 38 385 54 02

**E-mail** info@rotar.com

**Website** www.rotar.com





**GET THE  
RED CRUSH!**