



**WACKER
NEUSON**
all it takes!

TH750 Telehandler



On the cutting edge – the TH750

The powerful Load Sensing work hydraulics with 140 l/min combined with a 4.8-ton payload ensures maximum performance in materials handling. Load sensing makes it possible for all hydraulic functions to overlap in parallel, which raises productivity. The TH750 is optimally suited for sweeping thanks to its powerful hydraulics; the 4.8-ton payload makes loading trucks fast and efficient. The TH750 is just right for really demanding performance requirements.

- Excellent visibility over the work area and attachment
- Stacking height of 7.017 meters
- Ergonomically shaped joystick console on the operator's seat
- Sturdy kinematics with 150° pivoting angle
- Extremely heavy duty design



Cab

The telehandler cabin offers the operator great comfort and a high degree of ergonomics for hours at a time. The adjustable comfort seat and practically arranged operator's controls permit you to work with even greater precision and functionality. Excellent visibility and low noise level round out the working area.



**WACKER
NEUSON**
all it takes!

Ergonomic Joystick Console

on the operator's seat: everything under control with one hand.



Practical for night job sites :

The joystick and all of the switches are illuminated.



Engine & Transmission

The engine meets current applicable exhaust emissions standards and impresses by pairing high performance and economic efficiency:

full power, economical to use.

- Infinitely variable drive system and perfectly tuned drive train for a given engine size.
- Efficient rpm reduction up to 2000 rpm at maximum speed (TH735, TH744, TH750): The operator selects the speed via the gas pedal. Once the top speed has been reached, the engine speed is automatically reduced.



Hydraulics and Control Circuits

The telehandler impresses by offering powerful work hydraulics with up to 187 l/min. Besides the rapid loading system work cycles, the hydraulic pumps guarantee operation of special attachments via the 2nd and 3rd control circuit — if needed, even with permanent function. The telehandler can be equipped optionally with more control circuits that expand the range of applications.



Three Types of Steering

Whether driving en route or for tight maneuvers: The Wacker Neuson telehandler proves what it can do with each use thanks to its three different types of steering, making child's play out of the transport of material.

All-wheel steering:

particularly maneuverable due to its 2 x 40 degree steering angle.

Front axle steering:


familiar handling even when driving fast on the road.

Crab steering:

ideal for parallel travel and maneuvering in the tightest spaces.


VLS driver assistance system

Work efficiently in complete safety — with the Vertical Lift System (VLS) driver assistance system, you will master this challenge with ease. The smooth and rapid lowering of the telescopic arm with its simultaneous semi-automatic telescopic movement allows even less-experienced operators to operate based on fluid working principles. Additionally, the virtually vertical lifting and lowering movement makes the telehandler very stable.

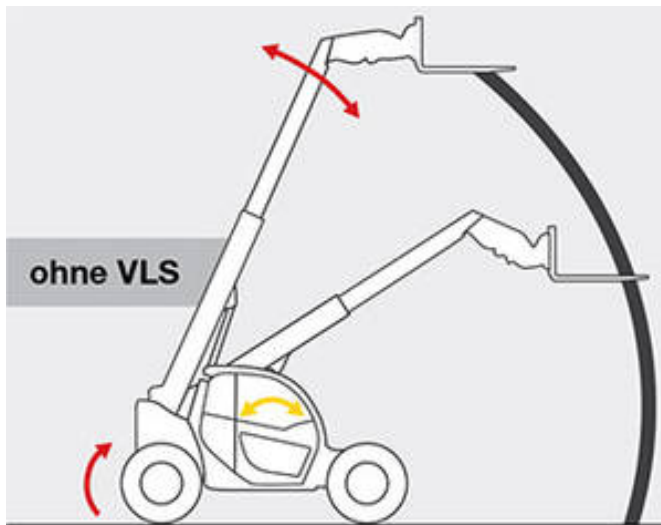

Conventional systems (without VLS)

The machines can be pushed to their tipping limits purely when lowering.

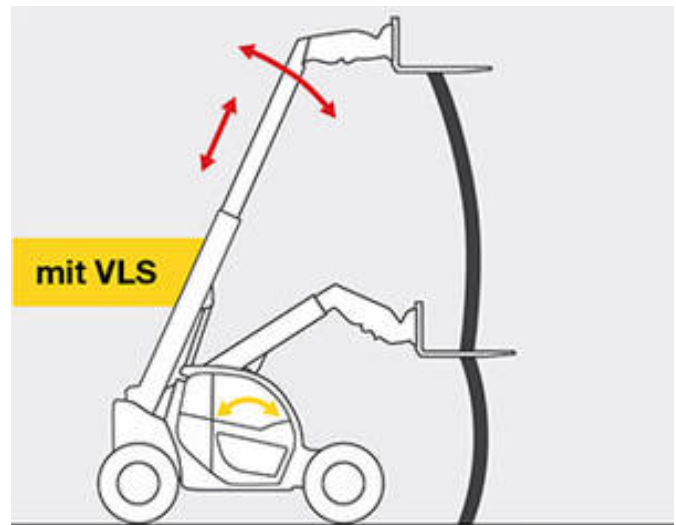

Driver assistance system VLS

Virtually vertical movement. Hardly any load torque shift in the longitudinal direction of the machine.

— Operating input

— Loading system response

Telehandler expertise that provides advantages.



High payloads

Our telehandlers are designed for performance. They assure you rapid and high materials handling capacity during each use.



Work safer than ever

Safe, comfortable and efficient at the same time: In the event, for example, of a risk of overload, the innovative driver assistance system VLS (Vertical Lift System) switches on semi-automatically, intelligently intervening in the telescoping motion, and moving the load downwards in a vertical line.



More visibility, greater safety

You benefit from improved handling and greater safety while working thanks to optimal view of the attachment and work environment.



Locate telehandlers at any time

With the Global Monitoring System, you can always determine the exact location of your machines.



**WACKER
NEUSON**
all it takes!



Small turning radius, big power output

The highly maneuverable telehandlers let you turn on a dime, thus giving you ideal maneuverability on the tightest job sites.



We distinguish particularly economical and environment-friendly products, such as the telehandler with VLS, by labelling them with an ECO seal.

www.wackerneuson.com/eco



Technical specifications

Operating data

Lift height (max.)	7,017 mm
Weight	10,000 kg
Turning radius over tires	3,755 mm

Engine / Motor

Engine / Motor manufacturer	Deutz
Engine performance	100 kW
Displacement	3,621 cm ³
Emission standards stage	IV
Sound emission at the operator's ear	78 dB(A)

Power transmission

Traction drive	Wide-angle hydrostat
Speed (Standard)	0 – 20 km/h
Speed (optional)	0 – 30/0 – 40 km/h
Axles	Planetary-steering drive axle
Total pivoting angle	20 °

Steering and operating hydraulics

Duty pump	Load Sensing
Flow rate	140 l/min
Pressure	260 bar

Kinematics


Bucket capacity	1.2 m ³
Total rotation angle of the vehicle carrier	150 °
Payload (max. LSP 500 mm)	4,800 kg
Lift height at max. load	5,600 mm
Payload at max. lifting height	3,500 kg
Payload at max. reach	1,700 kg
Range at max. load	1,700 mm
Range (max. stacking)	3,790 mm

Filling capacities

Tank capacity	180 l
Hydraulic oil tank	100 l



Dimensions

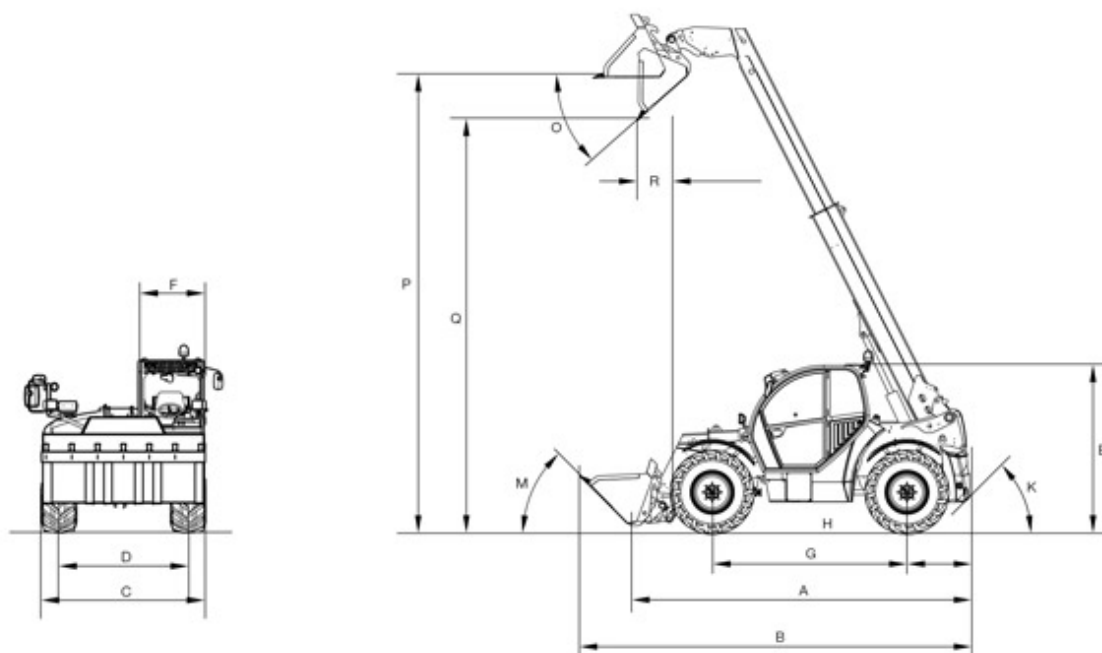

A	Length incl. tool frame	4,985 mm
B	Length with standard bucket	6,160 mm
C	Width with standard tires	2,500 mm
E	Height to cab roof	2,520 mm
F	Width cab (interior)	990 mm
M	Tilt-in angle bucket	45 °
O	Dump angle bucket	41 °
P	Overhead loading height with standard bucket	6,835 mm
R	Dump reach with standard bucket	495 mm



**WACKER
NEUSON**
all it takes!

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2017 Wacker Neuson SE.