


VT8

The compact footprint and ease of use are two main features that make the VT8 light tower one of the top models in the Generac Tower Light® range. High performance balanced with low cost allowed the VT8 to become the best-seller model in the extra-European market.

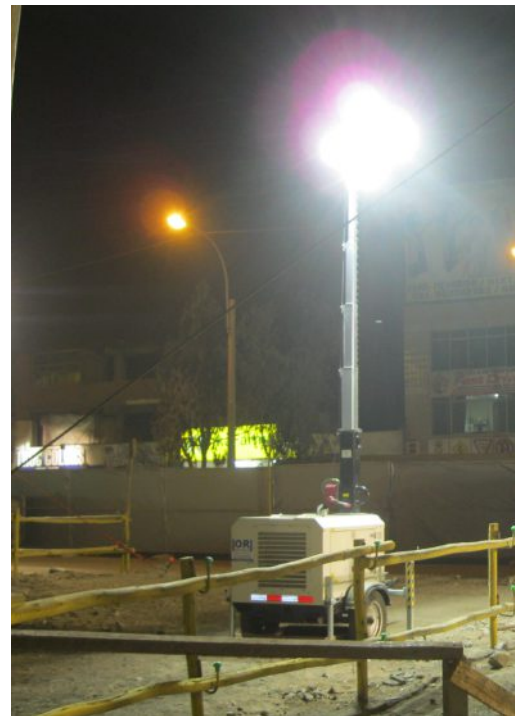

VT8 K

VT8 Y

VT8 P

TECHNICAL DATA		VT8 K	VT8 Y	VT8 P
Minimum dimensions (mm)	Lenght x Width x Height	2650 x 1300 x 2460	2650 x 1300 x 2460	2650 x 1300 x 2460
Maximum dimensions (mm)	Lenght x Width x Height	2650 x 2460 x 8000	2650 x 2460 x 8000	2650 x 2460 x 8000
Dry weight (kg)		719	719	719
Lifting system	M:Manual / H:Hydraulic	M	M	M
Mast rotation (°)		340	340	340
Lamps power (W)		4 x 1000	4 x 1000	4 x 1000
Lamps type	MH: MetalHalide / LD: LED	MH	MH	MH
Total lumen (Lm)		360000	360000	360000
Illuminated area (m²)		4200	4200	4200
Engine		Kubota D1105	Yanmar 3TN	Perkins 403D-11
Engine cooling	W:water / A:air	W	W	W
Cylinders (q.ty)		3	3	3
Engine speed (RPM)	50 / 60 Hz	1500 / 1800	1500 / 1800	1500 / 1800
Liquid containment (110%)	√:Yes / ●:No	●	●	●
Alternator	kVA/V/Hz	8/220/50 - 8/240/60	8/220/50 - 8/240/60	8/220/50 - 8/240/60
Outlet Socket	kVA/V/Hz	3/220/50 - 3/240/60	3/220/50 - 3/240/60	3/220/50 - 3/240/60
Avg. sound pressure	dB(A)@7mt	68	68	68
Wind speed resistance (km/h)		110	110	110
Tank capacity (liters)		75	75	75
Total running time (h)		44	47	40

THE BEST SELLER

The VT8 is the best seller model of light tower in the extra-european market, thanks to the vertical mast and the high quality features granted by Generac Tower Light.®

TOP STABILITY

Five fully integrated stabilizers will ensure maximum stability in every application.

VERTICAL MAST

A telescopic vertical mast with manual lifting system and a maximum height of 8 meters.

**METAL HALIDE LAMPS**

4x1000W powerful metal halide lamps able to illuminate medium and big working areas.

TRAILER OPTIONS

The VT8 is equipped as standard with a low speed trailer but it can be also mounted on a straight road trailer.

ENGINE OPTIONS

You can choose the engine you prefer between three options: Yanmar 3TN, Kubota D1105 and Perkins 403D-11

OPTIONS AVAILABLE

Low speed site-tow trailer (standard)
Road trailer type A (straight)
Axle with torsion bar
110V sockets
Pre-heating system
Earth picket with 5m cable
Main/generator selector switch
Plastic box for documents
Documents for EU road registration

Dedicated colour
Chalwyn valve
Certified spark arrestor
Hot-dip zinc coating of mast sections
Ball hitch type 50 mm
Eyelet hitch type 50 mm
Eco panel with digital timer and darkness sensor
Liquid containment tray
Schuko outlet socket (IP44)